
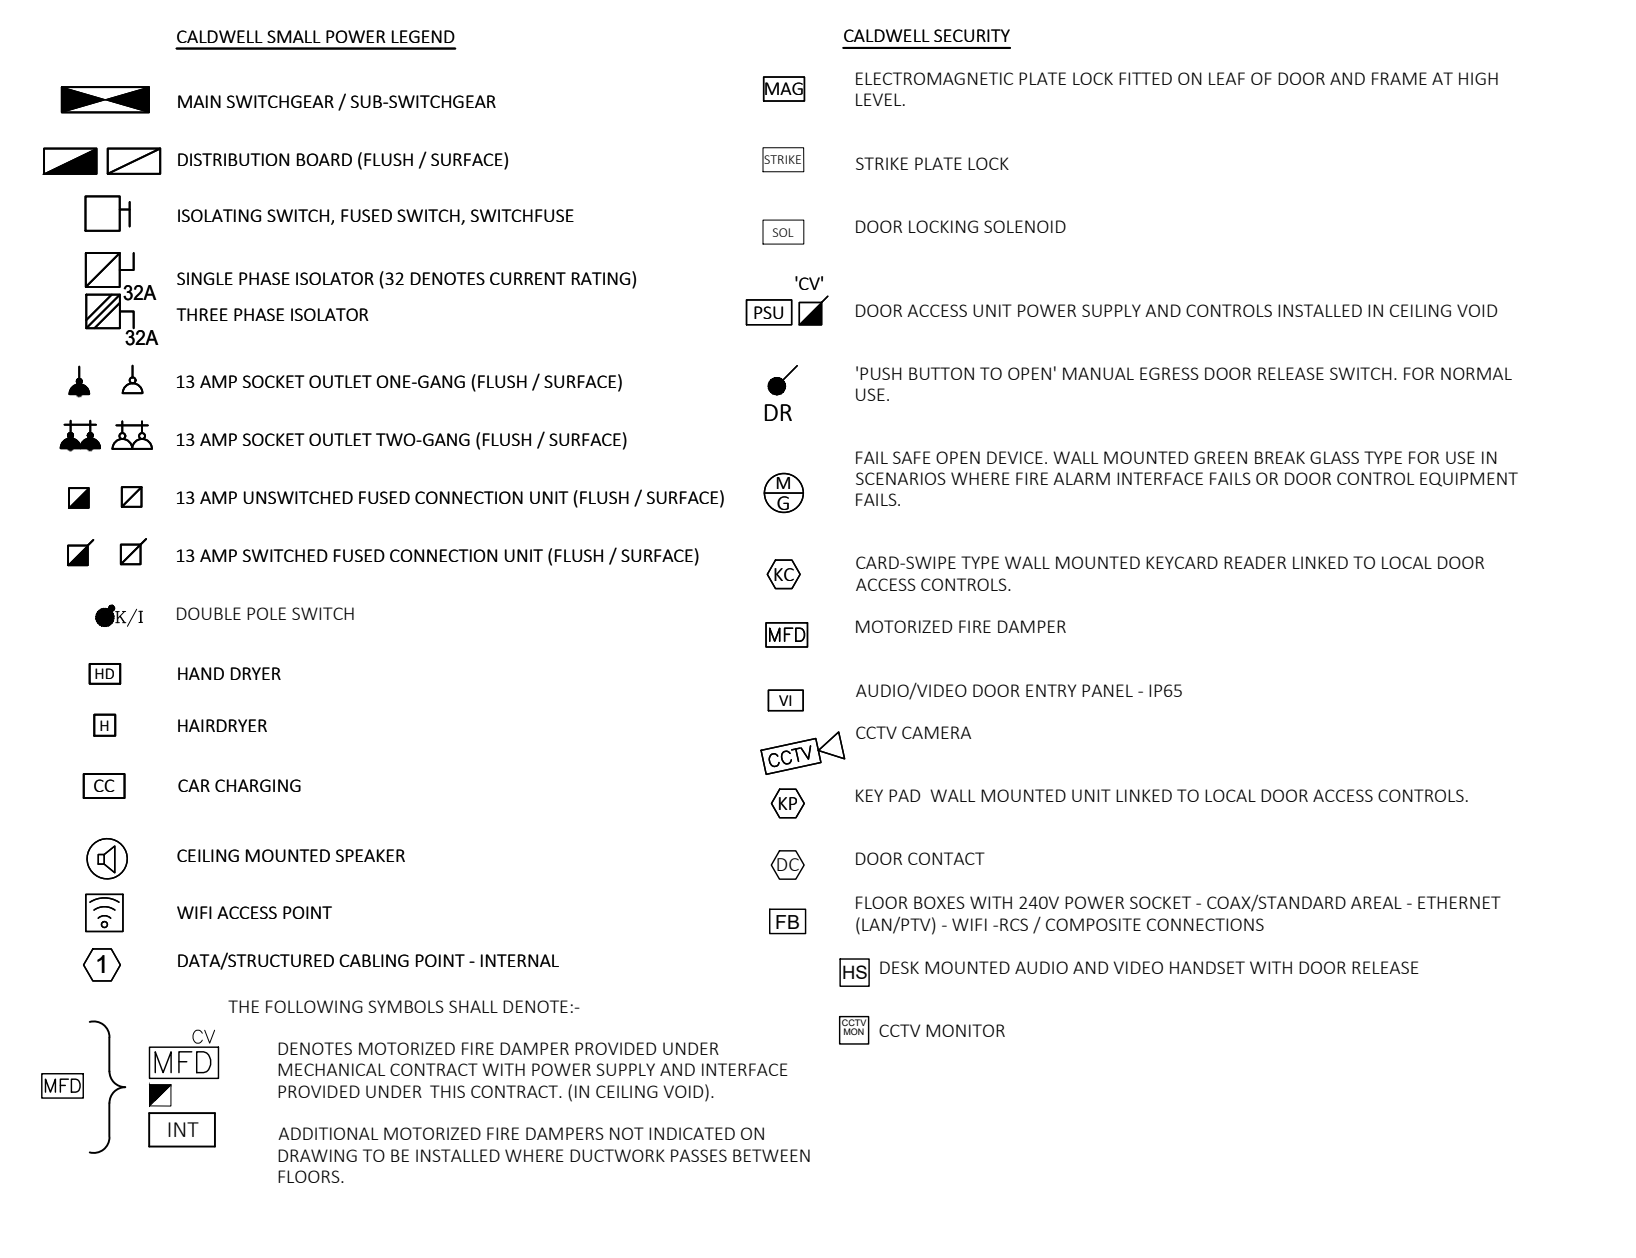


NOTES

1. EXACT LOCATIONS AND MOUNTING HEIGHTS OF ALL EQUIPMENT AND ACCESSORIES TO BE CLARIFIED PRIOR TO THE COMMENCEMENT OF THE ASSOCIATED WORKS
2. EXACT FINAL LOCATIONS OF EQUIPMENT AND DIMENSIONS ARE TO BE TAKEN FROM THE F&E MANUFACTURERS DRAWINGS
3. THE ELECTRICAL CONTRACTOR SHALL LIAISE WITH THE POOL EQUIPMENT SUPPLIER CONFIRMING THE RATINGS & PHASES OF ALL EQUIPMENT & NECESSARY PROTECTIVE DEVICES & UNDERTAKE RECALCULATION OF CIRCUITS WHERE LOCATIONS HAVE ALTERED
4. THE ELECTRICAL CONTRACTOR SHALL LIAISE WITH THE MECHANICAL CONTRACTOR TO CLARIFY ALL PIPEWORK DROPS
5. GENERALLY BONDING OUTLETS SHALL BE PROVIDED USING COPPER STRANDED LSF G/Y SHEATHED CABLE EMANATING FROM A SINGLE GANG CABLE OUTLET RECESSED WITHIN THE WALL ADJACENT EQUIPMENT TO BE BONDED. CABLE SHALL BE 'PIGGY-TAIL' COILED FROM OUTLET TO THE EQUIPMENT WITH APPROPRIATE FIXING
6. GENERALLY ACCESSORIES SHALL BE RECESSED WITHIN THE BUILDING FABRIC AS NOTED WITHIN THE SPECIFICATION
7. ISOLATING SWITCHES SHALL ALSO BE PROVIDED RECESSED WITHIN THE BUILDING FABRIC PROVIDED RECESSED USING CLIPSAL LTD IP66 'INDUSTRIAL 56 SERIES' RANGE OF ACCESSORIES
8. REFER TO SCHEMATIC WIRING DIAGRAMS FOR FURTHER INFORMATION WHERE APPLICABLE
10. HAND DRYERS SHALL BE MOUNTED IN ACCORDANCE WITH MANUFACTURES INSTALLATION 1200mm FROM THEIR UNDERSIDE ASSOCIATED CONNECTION UNIT SUPPLIES SHALL BE MOUNTED ABOVE DRYERS AT 2200mm RFL WITH CONCEALED CONDUIT BESA BOX TO REAR OF DRYERS.
11. THE EXACT LAYOUT OF SERVICE DUCTS TO BE AGREED ON SITE. THIS CONTRACT SHALL INCLUDE FOR CLOSELY LIAISING WITH THE MECHANICAL SERVICES INSTALLATION CONTRACTOR & SETTING UP A SAMPLE DUCT WITH ALL SERVICES PIPEWORK, TRAY ETC. FOR APPROVAL
12. GENERALLY ALL CABLE CONTAINMENT IS ABSENT FROM THE DRAWINGS FOR CLARITY. ONLY WHERE THEY MAYBE ILLUSTRATED ARE THEY INDICATIVE. THE ELECTRICAL CONTRACTOR SHALL BE DEEMED TO INCLUDE FOR ALL NECESSARY CONTAINMENT IN THE TYPES, ROUTES, QUANTITIES, SIZES & COMPARTMENTILISED AS REQUIRED.

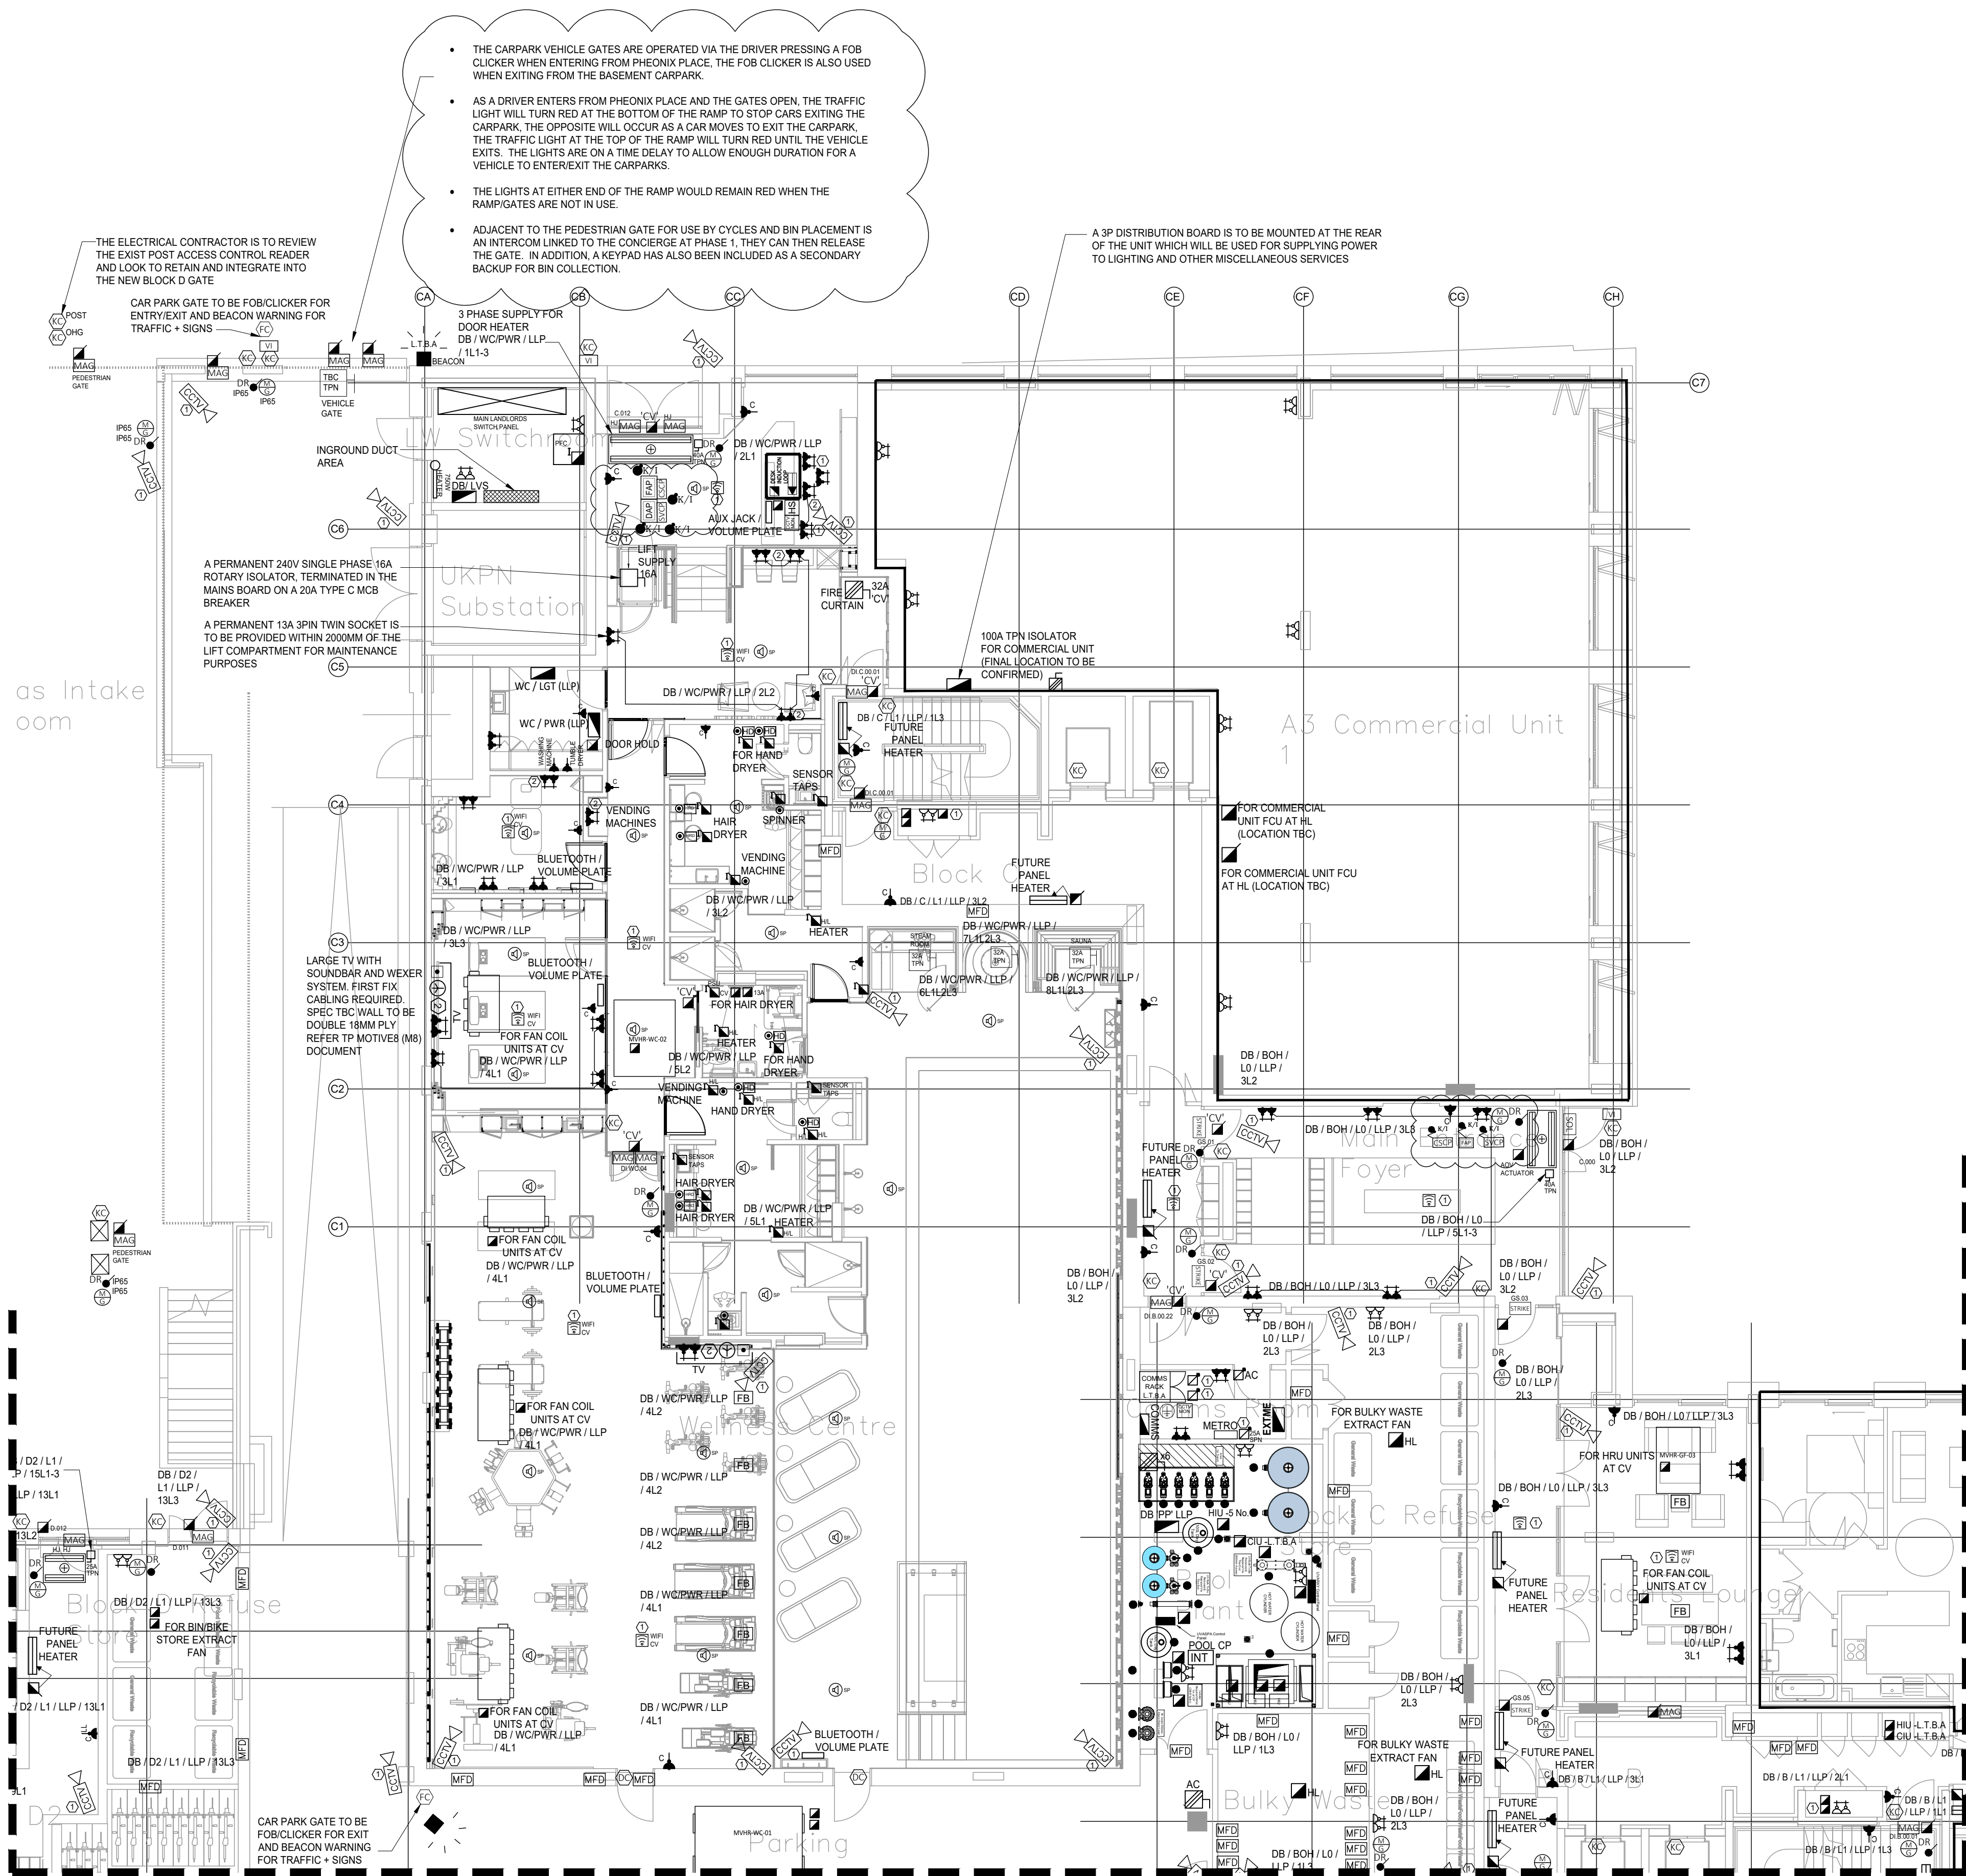

M	NOV.22	CONTRACT ISSUE - GATE ANNOTATION ADDED, COMMERCIAL SPRINKLER ADDED TO WELLNESS CENTER AND B/C ENTRANCE	CS	LW
L	AUG.22	CONTRACT ISSUE - MECH POWER INFO UPDATED	CS	LW
K	AUG.22	CONTRACT ISSUE - PLATFORM LIFT POWER UPDATED AND ALSO CCTV POSITION/GATE	CS	LW
J	AUG.22	CONTRACT ISSUE - INTERCOM REMOVED, STRIKE PLATE REPLACED WITH MAG LOCKS	CS	LW
I	JUN.22	CONTRACT ISSUE - UPDATED TO SUIT SECURITY REQUIREMENTS	CS	LW
H	JUN.22	CONTRACT ISSUE - UPDATED TO SUIT MECH REQUIREMENTS AND NEW XREF	CS	LW
REV	DATE	DESCRIPTION	DR	CK

Caldwell

ARCHITECT	RYCHER ARCHITECTS		
JOB	MOUNT PLEASANT PHASE 2 4023		
DRAWING	GENERAL PURPOSE SOCKET OUTLETS, SMALL POWER AND SPECIALIST SYSTEMS LEVEL 00 BLOCK C		
DRAWING NO./REVISION	MPP2 - CAL - ZZ - 00 - M2 - E - 200 - W		
SCALE /PRINTED AT	DATE	DRAWN	CHECKED
1:100@A1	DEC'20	CS	LW
UNIT 6 FORESTGROVE BUSINESS PARK NEWTOWNBELFAST BELFAST BT8 6AW		TEL: 02890699720 FAX: 02890641625 E-MAIL: admin@caldwellconsulting.net	

INCLUDE ALL NECESSARY OFFSETS OF SERVICES IN CEILING VOIDS, SERVICE DUCTS AND ALL OTHER AREAS TO ACHIEVE CROSSOVERS AND CO-ORDINATION OF MECHANICAL AND ELECTRICAL SERVICES.