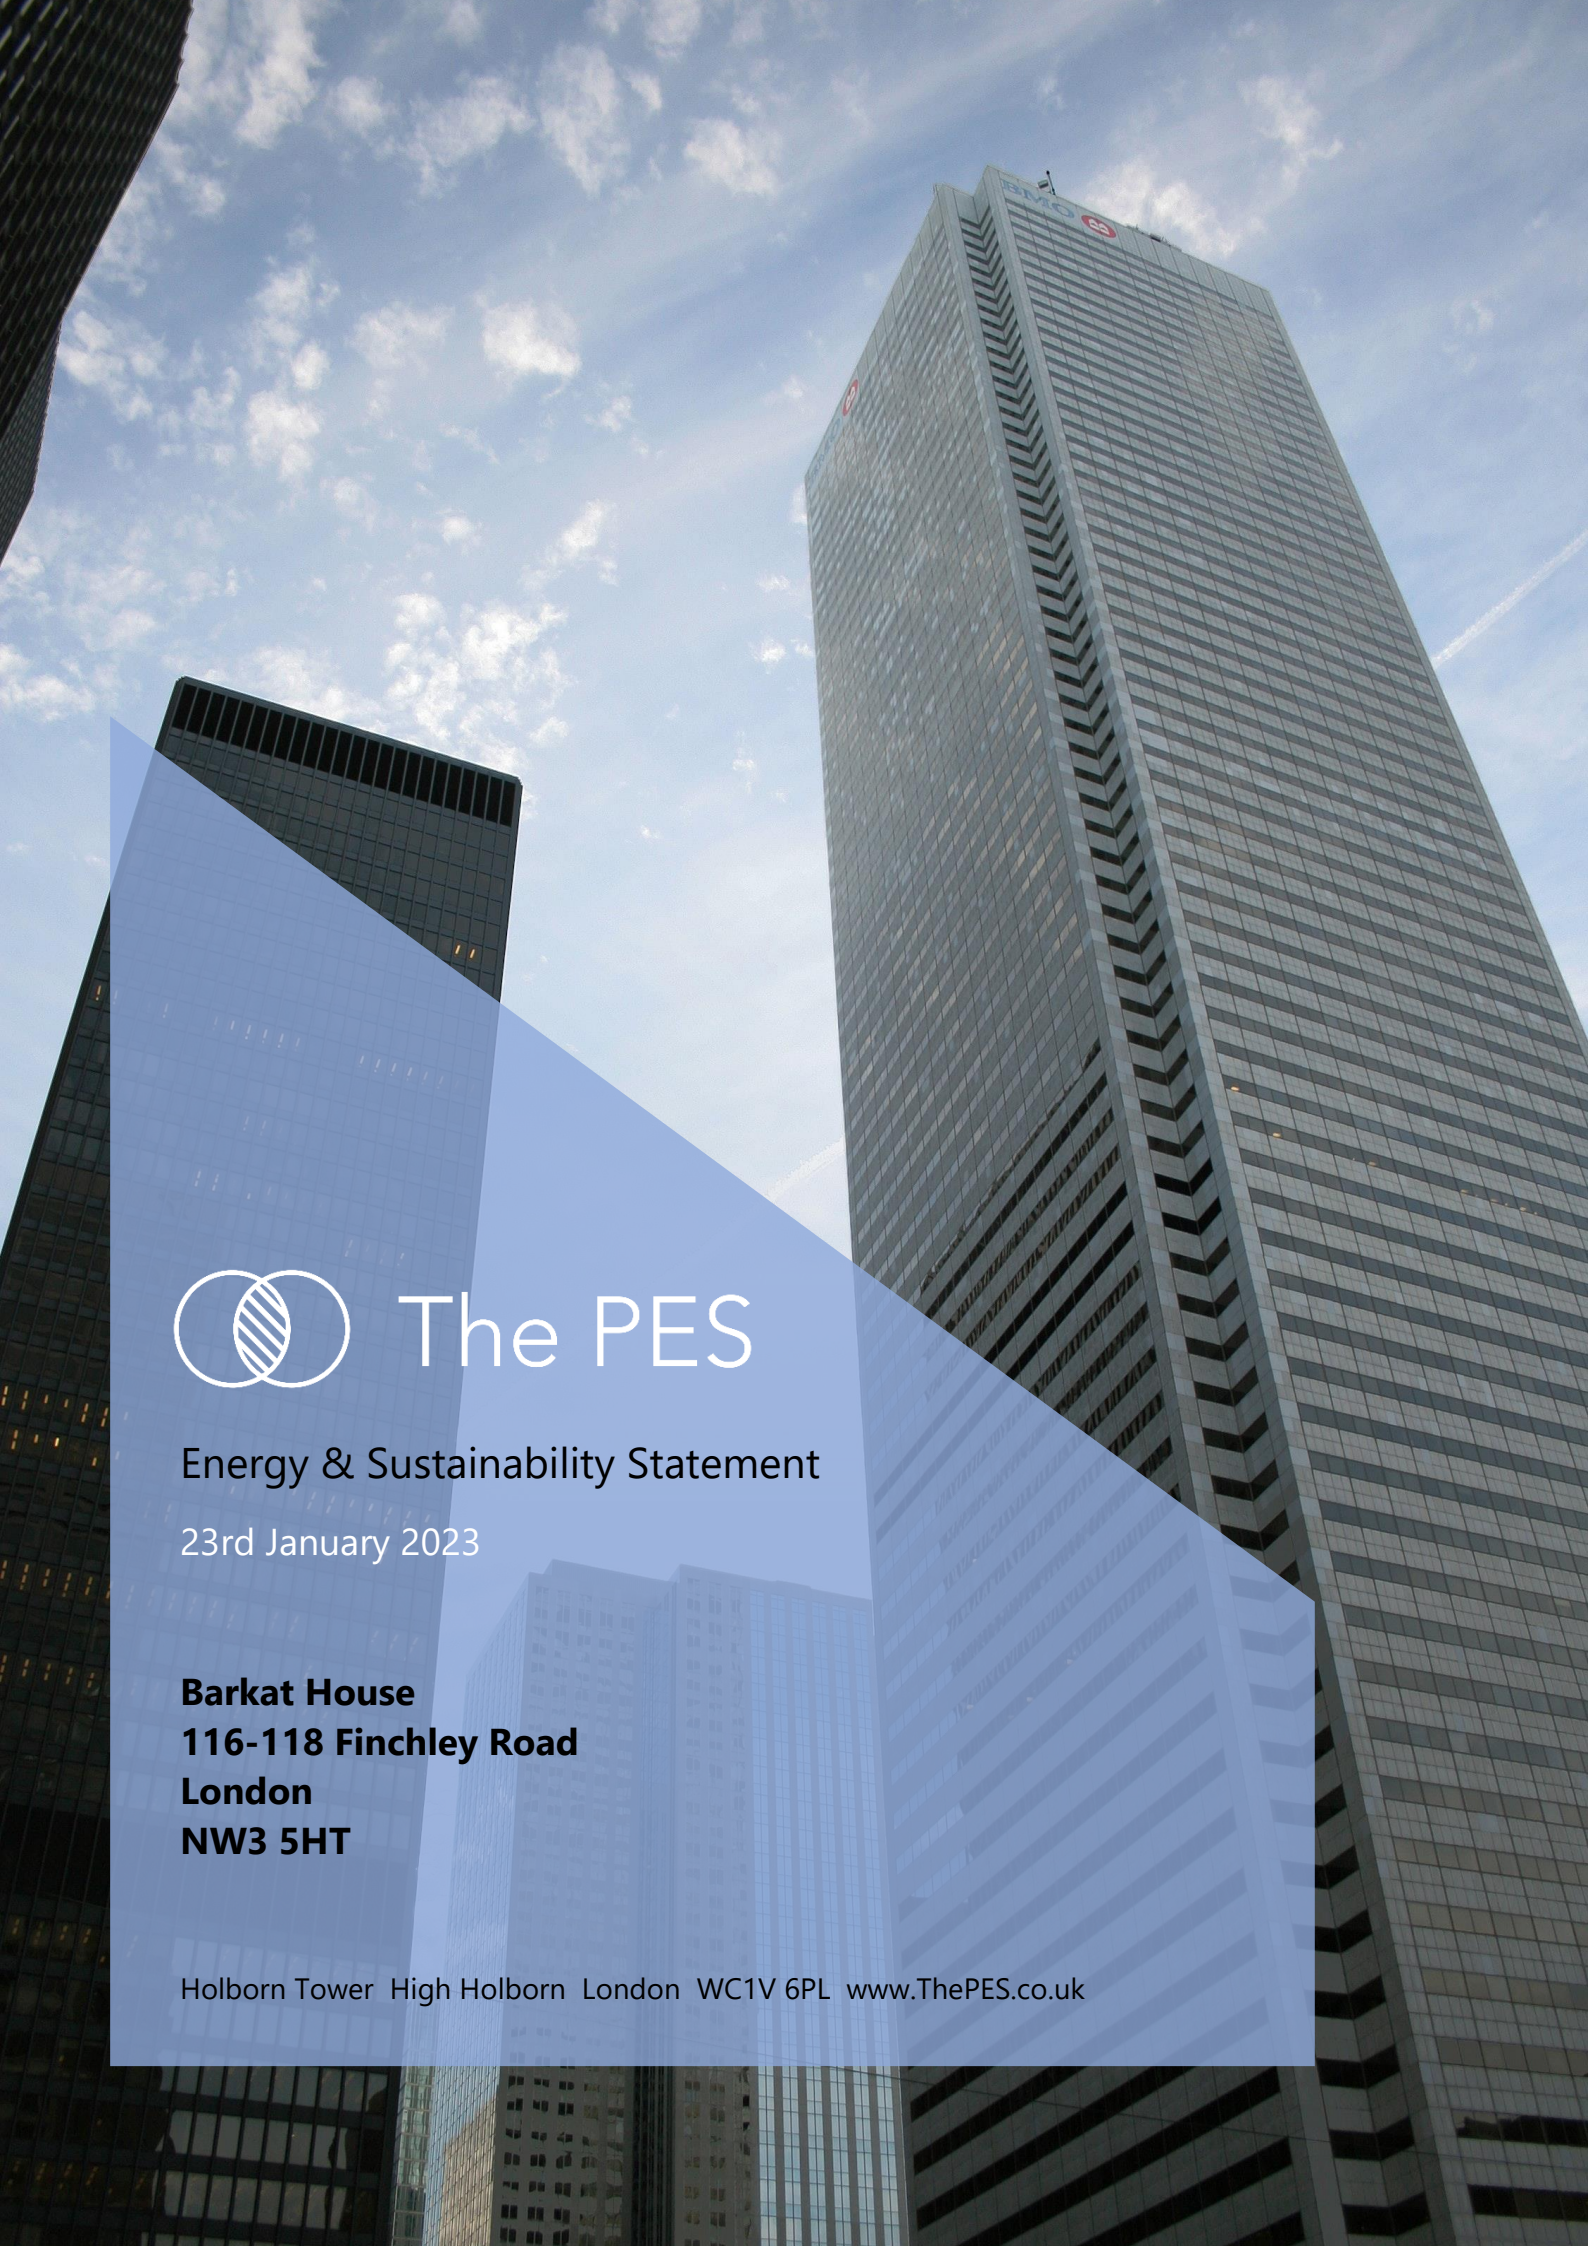

The PES

Energy & Sustainability Statement

23rd January 2023

Barkat House
116-118 Finchley Road
London
NW3 5HT

Holborn Tower High Holborn London WC1V 6PL www.ThePES.co.uk

The PES

Contents

1	Executive Summary	3
2	Site, Proposal & Planning Policy	4
3	Baseline Energy results	9
4	Design for Energy Efficiency "Be Lean"	13
5	Supplying Energy Efficiently "Be Clean"	18
6	Renewable Energy Options "Be Green"	20
7	Sustainable Design and Construction	25
8	Conclusions	28

Appendices

A SAP & BRUKL TER Outputs – Baseline Energy Use

B SAP & BRUKL DER Outputs – "Be Lean"

C SAP & BRUKL DER Outputs - Final Emissions – "Be Green"

D GLA Part L 2021 Reporting Spreadsheet

Version Control

V1	18-01-23	
V2	23-01-23	Wording changes

1.0 Executive Summary

The proposed development project at Barkat House involves the development of a 6 floor rear extension to the existing building, providing new office and residential accommodation.

It has been designed to achieve the highest of environmental performance standards following the Energy Hierarchy as set down by the London Plan and the London Borough of Camden's local plan policies.

The report takes on board the latest GLA guidance on writing energy statements (June 2022) as well as taking into account matters raised within the London Plan 2021.

The PES Ltd have been appointed to develop a strategy and advise how the proposed development of new build apartments and commercial will comply with these requirements.

A 'Lean, Clean, Green' has been adopted and the development achieves an improvement in build fabric at over **24.09%** at the "Be Lean" stage and an overall improvement (BER/TER) in regulated emissions at over **87.06%** above Part L 2021 standard, through the adoption of very high standards of insulation, heat pump driven heating and hot water systems and a roof mounted PV array.

2.0 The Site & Proposal

The redevelopment proposals for the site at Barkat House are for the construction of a 6-storey rear extension to create new office and residential space.

Overall, the project seeks to deliver 325m^2 of new office space and 112m^2 of C3 space by way of extension and reconfiguration of the existing residential floor space.

2.1 Local Planning Context

The site sits within the London Borough of Camden

The project sits within the London Borough of Camden (Camden).

Camden's Local Plan was adopted in July 2017

Chapter 8 deals with matters of sustainability and climate change:-

Policy CC1 Climate change mitigation

The Council will require all development to minimise the effects of climate change and encourage all developments to meet the highest feasible environmental standards that are financially viable during construction and occupation.

We will:

a. promote zero carbon development and require all development to reduce carbon dioxide emissions through following the steps in the energy hierarchy;

b. require all major development to demonstrate how London Plan targets for carbon dioxide emissions have been met;

c. ensure that the location of development and mix of land uses minimise the need to travel by car and help to support decentralised energy networks;

d. support and encourage sensitive energy efficiency improvements to existing buildings;

e. require all proposals that involve substantial demolition to demonstrate that it is not possible to retain and improve the existing building; and

f. expect all developments to optimise resource efficiency.

Policy CC2 Adapting to climate change

The Council will require development to be resilient to climate change.

All development should adopt appropriate climate change adaptation measures such as:

a. the protection of existing green spaces and promoting new appropriate green infrastructure;

b. not increasing, and wherever possible reducing, surface water runoff through increasing permeable surfaces and use of Sustainable Drainage Systems;

c. incorporating bio-diverse roofs, combination green and blue roofs and green walls where appropriate; and

d. measures to reduce the impact of urban and dwelling overheating, including application of the cooling hierarchy.

Any development involving 5 or more residential units or 500 sqm or more of any additional floorspace is required to demonstrate the above in a Sustainability Statement.

2.2 The London Plan

Chapter 9 deals with Sustainable Infrastructure: -

Policy SI2 Minimising greenhouse gas emissions

Major development should be net zero-carbon. This means reducing greenhouse gas emissions in operation and minimising both annual and peak energy demand in accordance with the following energy hierarchy:
1) be lean: use less energy and manage demand during operation
2) be clean: exploit local energy resources (such as secondary heat) and supply energy efficiently and cleanly
3) be green: maximise opportunities for renewable energy by producing, storing and using renewable energy on-site
4) be seen: monitor, verify and report on energy performance.

B Major development should include a detailed energy strategy to demonstrate how the zero-carbon target will be met within the framework of the energy hierarchy and will be expected to monitor and report on energy performance.

C In meeting the zero-carbon target a minimum on-site reduction of at least 35 per cent beyond Building Regulations is expected. Residential development should aim to achieve 10 per cent, and non-residential development should aim to achieve 15 per cent through energy efficiency measures. Where it is clearly demonstrated that the zero-carbon target cannot be fully achieved on-site, any shortfall should be provided:

1) through a cash in lieu contribution to the relevant borough's carbon offset fund, and/or
2) off-site provided that an alternative proposal is identified, and delivery is certain.

Policy SI3 - Energy infrastructure

A Boroughs and developers should engage at an early stage with relevant energy companies and bodies to establish the future energy and infrastructure requirements arising from large-scale development proposals such as Opportunity Areas, Town Centres, other growth areas or clusters of significant new development.
B Energy masterplans should be developed for large-scale development locations (such as those outlined in Part A and other opportunities) which establish the most effective energy supply options. Energy masterplans should identify:

1) major heat loads (including anchor heat loads, with particular reference to sites such as universities, hospitals and social housing)
2) heat loads from existing buildings that can be connected to future phases of a heat network
3) major heat supply plant including opportunities to utilise heat from energy from waste plants
4) secondary heat sources, including both environmental and waste heat
5) opportunities for low and ambient temperature heat networks
6) possible land for energy centres and/or energy storage
7) possible heating and cooling network routes
8) opportunities for futureproofing utility infrastructure networks to minimise the impact from road works
9) infrastructure and land requirements for electricity and gas supplies
10) implementation options for delivering feasible projects, considering issues of procurement, funding and risk, and the role of the public sector
11) opportunities to maximise renewable electricity generation and incorporate demand-side response measures.

D Major development proposals within Heat Network Priority Areas should have a communal low-temperature heating system:

1) the heat source for the communal heating system should be selected in accordance with the following heating hierarchy:
a) connect to local existing or planned heat networks
b) use zero-emission or local secondary heat sources (in conjunction with heat pump, if required)
c) use low-emission combined heat and power (CHP) (only where there is a case for CHP to enable the delivery of an area-wide heat network, meet the development's electricity demand and provide demand response to the local electricity network)
d) use ultra-low NOx gas boilers

2) CHP and ultra-low NOx gas boiler communal or district heating systems should be designed to ensure that they meet the requirements in Part B of Policy SI 1 Improving air quality
3) where a heat network is planned but not yet in existence the development should be designed to allow for the cost-effective connection at a later date.

Policy SI4

Managing heat risk

A Development proposals should minimise adverse impacts on the urban heat island through design, layout, orientation, materials and the incorporation of green infrastructure.

B Major development proposals should demonstrate through an energy strategy how they will reduce the potential for internal overheating and reliance on air conditioning systems in accordance with the following cooling hierarchy:

1) reduce the amount of heat entering a building through orientation, shading, high albedo materials, fenestration, insulation and the provision of green infrastructure

2) minimise internal heat generation through energy efficient design

3) manage the heat within the building through exposed internal thermal mass and high ceilings

4) provide passive ventilation

5) provide mechanical ventilation

6) provide active cooling systems.

Policy SI5 Water infrastructure

C Development proposals should:

1) through the use of Planning Conditions minimise the use of mains water in line with the Optional Requirement of the Building Regulations (residential development), achieving mains water consumption of 105 litres or less per head per day (excluding allowance of up to five litres for external water consumption)

2) achieve at least the BREEAM excellent standard for the 'Wat 01' water category or equivalent (commercial development)

3) incorporate measures such as smart metering, water saving and recycling measures, including retrofitting, to help to achieve lower water consumption rates and to maximise futureproofing.

Policy SI12 Flood risk management

C Development proposals should ensure that flood risk is minimised and mitigated, and that residual risk is addressed. This should include, where possible, making space for water and aiming for development to be set back from the banks of watercourses.

E Development proposals for utility services should be designed to remain operational under flood conditions and buildings should be designed for quick recovery following a flood.

F Development proposals adjacent to flood defences will be required to protect the integrity of flood defences and allow access for future maintenance and upgrading. Unless exceptional circumstances are demonstrated for not doing so, development proposals should be set back from flood defences to allow for any foreseeable future maintenance and upgrades in a sustainable and cost-effective way.

G Natural flood management methods should be employed in development proposals due to their multiple benefits including increasing flood storage and creating recreational areas and habitat.

Policy SI13 - Sustainable drainage

A Lead Local Flood Authorities should identify – through their Local Flood Risk Management Strategies and Surface Water Management Plans – areas where there are particular surface water management issues and aim to reduce these risks. Increases in surface water run-off outside these areas also need to be identified and addressed.

B Development proposals should aim to achieve greenfield run-off rates and ensure that surface water run-off is managed as close to its source as possible. There should also be a preference for green over grey features, in line with the following drainage hierarchy:

1) rainwater use as a resource (for example rainwater harvesting, blue roofs for irrigation)

2) rainwater infiltration to ground at or close to source

3) rainwater attenuation in green infrastructure features for gradual release (for example green roofs, rain gardens) It is noted that the proposed non-domestic development is greater than 1,000m^2 and would be considered major development.

4) rainwater discharge direct to a watercourse (unless not appropriate)

5) controlled rainwater discharge to a surface water sewer or drain

6) controlled rainwater discharge to a combined sewer.

C Development proposals for impermeable surfacing should normally be resisted unless they can be shown to be unavoidable, including on small surfaces such as front gardens and driveways.

D Drainage should be designed and implemented in ways that promote multiple benefits including increased water use efficiency, improved water quality, and enhanced biodiversity, urban greening, amenity and recreation.

In line with the latest and current GLA guidance the project at Barkat House has progressed, and this assessment is based upon Part L 2021 and SAP10.2 emissions calculation methodology.

The Part L 2021 reporting spreadsheet is attached at **Appendix D**.

3.0 Baseline energy results

The first stage of the Mayor's Energy Hierarchy is to consider the baseline energy model.

The following section details the baseline energy requirements for the development – the starting point when considering the energy hierarchy.

3.1 Dwelling Created via refurbishment/change of use

The baseline model for the extended flats would be considered as refurbishments/extension under AD Part L1 2021.

The baseline parameters are set out under Table 12 (Appendix 3) of the GLA guidance (June 2022).

Table 12: *Residential notional specification for existing buildings*

Element	Unit	Specification[3]
External Wall – cavity insulation	W/m²K	0.55
External Wall – internal or external insulation	W/m²K	0.30
Roof	W/m²K	0.16
Floor	W/m²K	0.25
Glazing	W/m²K	1.60
Vision element	g-value	0.63
Air permeability	(m^3/h m^2 @ 50 Pa)	Default - determined by fabric element types
Thermal Bridging	W/m²K	Default
HVAC type	-	As per final building specification
Heating and Hot Water	Per cent	Efficiencies to match the applicable notional values for existing dwellings (see section 6 of Approved Document L1)
Cooling (air-condition)	SEER	None
Lighting	Per cent	100 per cent low energy lighting with a minimum luminous efficacy of 75 light source lumens per circuit-watt.

SAP creates the notional reference building, based upon the same shape and form as the proposed dwellings, prior to applying the actual build and HVAC specification for the proposed dwellings.

Once all of the baseline emission rates have been calculated in line with the above Government approved methodologies, they are considered as stage 'zero' of the energy hierarchy as described earlier and Target Emission Rate sets the benchmark for the worst performing, but legally permissible, development.

3.2 Commercial Spaces

The energy requirements for space heating, water heating and ventilation within the proposed new build commercial space have been calculated using the National Calculation Method (NCM) in line with AD L2 of the Building Regulations 2021.

The Government approved assessment methodology is the Simplified Building Energy Model (SBEM), The PES Ltd use an advanced modelling software - Design Builder - which enables accurate SBEM models to be created, as well as heat loss and cooling load calculations and full M&E design to be undertaken.

To consider the subject building performance against The Building Regulations (Approved Document L2) SBEM first creates the notional reference building, the characteristics of which are defined in within NCM and the minimum fabric values and fixed services efficiencies set down by AD L2

This creates the target Emission Rate (TER) and should be considered as stage 'zero' of the energy hierarchy as described earlier and sets the benchmark for the worst performing, but legally permissible, development against which, SBEM assesses the "actual" design, fabric values, heating lighting and ventilation systems and creates the Building Emissions Rate (BER).

The baseline model for the Barkat House project assumes heat pump driven heating and domestic hot water systems and a natural ventilation strategy.

3.3 Unregulated Energy Use

The baseline un-regulated energy use for cooking & appliances in the residential units have been calculated using the SAP Section 16 methodology; the same calculation used for Code for Sustainable Homes (CfSH) Ene 7.

Appliances = $E_A = 207.8 \text{ X } (\text{TFA X N})^{0.4714}$

Cooking = (119 + 24N)/TFA

N = no of occupant SAP table 1B

TFA – Total Floor Areas

The unregulated energy use for the commercial unit can be derived from the BRUKL outputs under section "Energy Consumption by End Use" - Equipment

The emissions associated with unregulated energy use per sqm is summarised in Table 1 below.

Table 1 – Unregulated Energy Use

Unit	CO_2 emissions - Unregulated Energy Use SAP10.2 Kg/sqm
Residential	3.87
Commercial	4.27

The un-regulated emission rates are added to the baseline regulated emission rates (as calculated under 3.1 & 3.2 above) in order to set the total baseline emission rates before then applying the energy hierarchy in line with The London Plan and Camden policies.

3.3 Baseline Results

The baseline building results have been calculated in line with SAP10.2 emission standards and are presented in Table 2 below. The Baseline SBEM & SAP outputs (which summarise the key data) are attached at **Appendix A**, with the GLA reporting Spreadsheet attached at **Appendix D.**

Table 2 – Baseline energy consumption and CO2 emissions

Unit	Total Regulated Emissions Kg/Annum	Total Unregulated Emissions Kg/Annum	Total Emissions Kg/Annum
Residential Extension	3106	547	**3653**
Commercial Space	1315	1878	**3193**
Development Total	**4,421**	**2,425**	**6,846**

4.0 Design for energy efficiency

The first step in the Mayor's 'Energy Hierarchy' as laid out in Chapter 9 of The London Plan, requests that buildings be designed to use improved energy efficiency measures – Be Lean. This will reduce demand for heating, cooling, and lighting, and therefore reduce operational costs while also minimizing associated carbon dioxide emissions.

This section sets out the measures included within the design of the development, to reduce the demand for energy, both gas and electricity (not including energy from renewable sources). The table at the end of this section details the amount of energy used and CO_2 produced by the building after the energy efficiency measures have been included. From these figures the overall reduction in CO_2 emissions, as a result of passive design measures, can be calculated. To achieve reductions in energy demand the following measures have been included within the design and specification of the building:

4.1 Passive Design

4.1.1 Residential Passive Design Strategy

The National Planning Policy Framework emphasises the need to take account of climate change over the longer term and plan new developments to avoid increased vulnerability to the range of impacts arising from climate change. The UK Climate Impacts Programme 2009 projections suggest that by the 2080's the UK is likely to experience summer temperatures that are up to 4.2°C higher than they are today.

Accordingly, designers are to ensure buildings are designed and constructed to be comfortable in higher temperatures, without resorting to energy intensive air conditioning.

In line with current GLA Guidance, the project at Barkat House has had been designed to ensure the building is not vulnerable to overheating; to instigate consideration of the risk of overheating with the proposed development, the design team have followed the guidance within the London Plan, which consider the control of overheating using the Cooling Hierarchy:-

1. **minimise internal heat generation through energy efficient design**

The project will be designed to best practice thermal insulation levels as noted, full details of which are noted under 4.3 below.

Not only does good insulation assist in reducing heat losses in the winter, but it also has a significant impact on preventing heat travelling through the build fabric during the summer.

2. **reduce the amount of heat entering a building in summer through orientation, shading, albedo, fenestration, insulation and green roofs and wall.**

The development site is within an areas of high rise buildings with some significant topographical shading from the buildings directly to the south and west

The proposed development will have a good open aspect mainly to the north east and south east, with new direct exposure to the peak southern sun.

The livings areas in the residential element have the benefit of large, glazed areas introducing natural daylight and attracting useful solar gain.

The principle south east facing, glazed areas for both the residential and commercial floors are afforded protection from excessive solar gain during the summer months by the tall building at 112 Finchley Road.

Across the scheme, the glazing to the secondary spaces – bedrooms and bathrooms – is much reduced glazing in keeping with the reduced heat demand associated.

Glazing specification has been a significant consideration as part of the overheating risk mitigation and the specified new glazing will achieve a low g-value in order to further assist in reducing overheating risk from excessive solar gain.

3. **manage the heat within the building through exposed internal thermal mass and high ceilings**

The new build structure is expected to be a steel fame with cast in-situ concrete floors, offering very significant thermal mass able to absorb heat during the summer months, which can then be ventilated during the evening or overnight.

4. **passive ventilation**

All glazing is designed to have opening areas to introduce high levels of natural levels of "purge" ventilation to further assist in the reduction of overheating risks in appropriate areas.

5. **mechanical ventilation**

Given the strategy set out above the design team are proposing a low energy natural ventilation

4.2 Heating System

The "notional" heating system considered under the "be lean – use less energy" section of the Energy Hierarchy for the extended dwellings, will consist of high efficiency condensing gas boilers providing under floor heating and domestic hot water to the project

- High efficiency boiler – (92% SEDBUK efficiency) & load compensation.
- Insulated primary pipework

To increase the efficiency in the use of the heating system, the following controls will be used to eliminate needless firing of the boilers.

- Boilers fitted with weather compensation and delayed start thermostats.

The "Be Lean" notional heating system will be heat pump driven in line with the GLA guidance (June 2022).

4.3 Fabric heat loss

Insulation measures will be utilised to ensure the calculated U-values exceed the Building Regulations minima, with specific guidance taken from the design team: -

- New wall constructions will be of a clad steel frame and will target a U-Value of 0.15W/m^{2}k or better.
- New flat roof constructions are to be of a lightweight warm-roof type, achieving a U-Value of 0.12W/m^{2}k
- The newly laid floors will achieve a minimum u value of 0.14/0.15W/m^{2}k subject to perimeter/area ratios

All of the above standards are at Passivhaus minimum fabric standards or better and aligns with the LETI guidance;

LETI (London Energy Transformation Initiative) is a network of over 1,000 built environment professionals who are working together to put London on the path to a zero carbon future

The guidance document published in 2019 set out performance standards for fabric, operational carbon and embedded carbon to enable new building to contribute the London's emission reduction targets.

Glazing

- The new glazing for windows and doors for the dwellings will be triple glazed with an area weighted average U-Value of 1.1W/m^{2}K or better.
- The new glazing for the offices spaces will achieve an area weighted average U-Value of 1.4W/m^{2}K or better.
-

Air Tightness

- The project be tested to 5m^3/hr/m^2 in line with best practice for naturally ventilated dwellings, with the office element testing to 3m^3/hr/m^2.

4.4 Ventilation

As noted above, the residential accommodation is to have natural ventilation with background ventilators and intermittent extract fans in line with the new Part F 2021

The commercial space is also able to be naturally ventilated.

4.5 Lighting and appliances

The development will incorporate high efficiency light fittings utilising LED lamps.

Common/circulation areas and the commercial units will also have an absence detection system to ensure lights cannot be left on when not in occupation.

The use of LED lighting will also minimise the internal gains commonly associated with tungsten and fluorescent lighting systems and thereby further reduce the potential for the flats and commercial units to overheat.

External lighting will utilise daylight controls to ensure lights are not active during the day.

4.6 Energy efficiency results

The above data has been used to update the SBEM & SAP models, the Building/Dwelling Emission Rate outputs of which are attached at **Appendix B**, whilst Table 3 sets out the total emissions using SAP10.2 data.

Table 3 – Energy Efficient emission levels

Unit	Total Regulated Emissions Kg/Annum	Total Unregulated Emissions Kg/Annum	Total Emissions Kg/Annum
Residential Extension	1563	547	2110
Commercial Spaces	1209	1878	3087
Development Total	**2,772**	**2,425**	**5,197**

The results show that the energy efficiency measures introduced have resulted in the reduction in regulated and unregulated CO_2 emissions from the development of **24.09%.**

Regulated emissions have been reduced by **37.30%** via the passive design measures highlighted above.

Table 4 – Energy Demand, "Be-Lean"

Further reporting requirements are tabulated below.

The total Part L Fabric Energy Efficiency Standard (FEES) for the development – set out in Table 5 below:-

Table 5 – Residential FEES

	Target Fabric Energy Efficiency (MWh/year)	Design Fabric Energy Efficiency (MWh/year)	Improvement (per cent)
Development Total	77.80	39.50	49.23

5.0 Supplying Energy Efficiently

5.1 Community Heating/Combined Heat and Power (CHP)

The London Plan, Chapter 9, requires that major developments exploit local energy resources (such as secondary heat) and supply energy efficiently and cleanly.

Major development in Heat Network Priority Areas should follow the heating hierarchy in Policy SI3 Energy infrastructure.

Therefore, this report must consider the availability of heat networks in the Camden area.

The map below shows the location of the site; it is located in heat network priority area (HNPA), but remote from any proposed energy network.

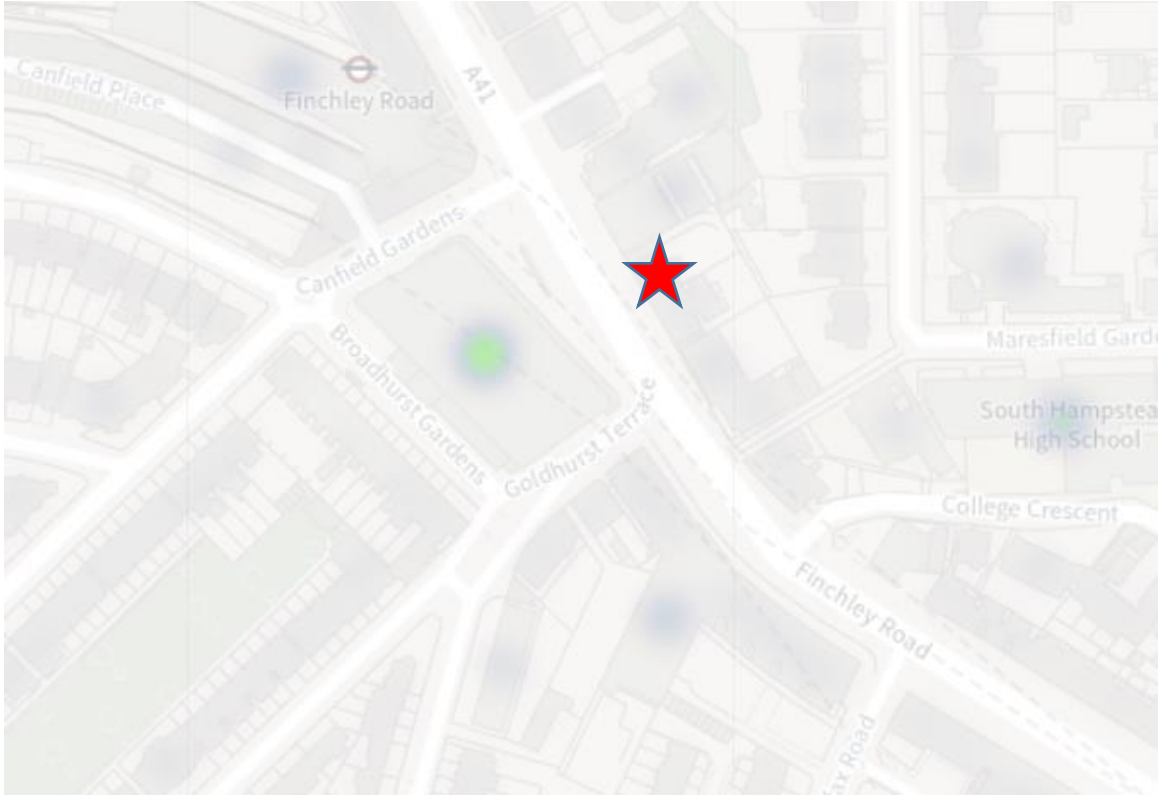

Extract from London Heat Map

Given the small scale of the development, with such limited year-round heat demand, any centralised system would suffer significant circulation losses, pending any long-term connection potential – which can be considered highly limited.

However, consideration must be given for an on-site district heating/CHP solution for the subject development.

5.2 On-site CHP/District Heating

The heat production facility for a district heating scheme is generally considered to include heat only boilers (HOB) and/or the production of both electricity and heat i.e. CHP.

CHP is, as a rule of thumb, only operated as a base load as, depending on the technology, it may be difficult and/or inefficient to operate according to daily variations in demand. In a well-designed district heating network heat from CHP will provide between 60% and 80% of the annual baseline heat (heating and hot water) requirement with heat-only boiler plants providing the peak load and back-up. To maximise efficiency of the engine it needs to run for at least 17 hours a day; therefore, the heat load needs to be present for this period.

The key benefit from running a CHP engine is that it produces electricity, which can displace grid supplied electricity, which has significant carbon savings. It is for this reason that CHP is designed to run for as many hours of the year as possible.

GLA Guidance states non-domestic developments providing a substantial coincidence of demand for heat and power for the majority of hours in the year (5,000 hours per annum) and the heat to power ratio is low (e.g., 1:1), will still be expected to include on-site CHP as part of their energy strategy to meet the London Plan CO_2 reduction targets.

Clearly, as a small-scale residential/commercial development, the year-round heat demand is not available and the potential for CHP lead systems can be dismissed.

6.0 Renewable Energy Options

The final element of the Mayor's 'Energy Hierarchy' requires development proposals should provide a reduction in expected carbon dioxide emissions through the use of on-site renewable energy generation, where feasible – Be Green.

Renewable energy can be defined as energy taken from naturally occurring or renewable sources, such as sunlight, wind, wave's tides, geothermal etc. Harnessing these energy sources can involve a direct use of natural energy, such as solar water heating panels, or it can be a more indirect process, such as the use of Biofuels produced from plants, which have harnessed and embodied the suns energy through photosynthesis.

The energy efficiency measures and the sourcing the energy efficiently outlined above have the most significant impact on the heating and hot water energy requirements for the development, and the associated reduction in energy consumption.

This section then sets out the feasibility of implementing different energy technologies in consideration of: -

- Potential for Carbon savings
- Capital costs
- Running costs
- Payback period as a result of energy saved/Government incentives
- Maturity/availability of technology
- Reliability of the technology and need for back up or alternative systems.

6.1 Government incentives

6.1.1 Smart Export Guarantee (SEG)

Introduced in 2020, the SEG will enable solar photovoltaic (PV), wind, hydro and anaerobic digestion (AD) installations up to 5MW and micro-combined heat and power (micro-CHP) up to 50kW will be able to receive an export tariff under the policy.

The SEG is a market-led initiative, requiring electricity supply licensees to offer export tariffs to eligible generators. Suppliers are free to set their own SEG compliant tariff price (provided it is above zero pence at all times) and decide how their tariffs work.

Installation owners are able to shop around and select the Licensee of their choice based upon an offer of the most appropriate tariff.

Payments are made against metered exports only.

6.1.1 Renewable Heat Incentive

The Renewable Heat Incentive (RHI) was formally withdrawn to all projects in March 2022.

6.2 Wind turbines

Wind turbines come in two main types'- horizontal axis and vertical axis. The more traditional horizontal axis systems rotate around the central pivot to face into the wind, whilst vertical axis systems work with wind from all directions.

The potential application of wind energy technologies at a particular site is dependent upon a variety of factors. But mainly these are: -

- Wind speed
- Wind turbulence
- Visual impact
- Noise impact
- Impact upon ecology

The availability and consistency of wind in urban environments is largely dependent upon the proximity, scale and orientation of surrounding obstructions. The has similar height buildings in most directions. To overcome these obstructions and to receive practical amounts of non-turbulent wind, the blades of a wind turbine would need to be placed significantly above the roof level of the surrounding buildings and the proposed project at Barkat House itself.

It is inconceivable that any wind turbines of this size would be considered acceptable in this location.

6.3 Solar Energy

The proposed development has areas of flat roof that could accommodate solar panels orientated to the south.

In general, the roofs will have an unrestricted aspect, so there is scope therefore to site solar photovoltaic (PV) or water heating equipment at roof level.

6.3.1 Solar water heating

Solar water heating panels come in two main types; flat plate collectors and evacuated tubes. Flat plate collectors feed water, or other types of fluid used specifically to carry heat, through a roof mounted collector and into a hot water storage tank. Evacuated tube collectors are slightly more advanced as they employ sealed vacuum tubes, which capture and harness the heat more effectively.

Both collector types can capture heat whether the sky is overcast or clear. Depending on location, approximately 900–1100 kWh of solar energy falls on each m^2 of unshaded UK roof surface annually. The usable energy output per m^2 of solar panel as a result of this amount of insolation ranges from between 380 – 550 kWh/yr.

Solar hot water systems are of course, displacing gas for DHW provision (as noted above), and due to the low cost of gas as a source of energy, solar thermal systems tend to have a very poor pay back model unless there is a reliable and consultant demand for hot water; a small size residential/commercial scheme simply does not provide this.

Accordingly, given the limited roof space available and the strategy to off-set the electrical use, solar PV may be a stronger candidate (see below) and offer a greater return in terms of a return on investment.

6.3.2 Photovoltaics (PV)

A 1kWp (1 kilowatt peak) system in the UK could be expected to produce between 790-800kWh of electricity per year based upon a south east orientation according to SAP2005 methodology used by the Microgeneration Certification Scheme (MCS). The figure given in the London Renewables Toolkit is 783 kWh per year for a development in London.

Despite the withdrawal of the Feed in Tariff, the returns on PV installations are still able to achieve 6-7% returns via the reduction in (ever more expensive) electricity consumption.

Accordingly, the design team are proposing to utilise the available roof space to install a 20 panel PV array, a total 8.8kWp array generating some 7245.47kWh/annum.

6.4 Biomass heating

Biomass is a term given to fuel derived directly from biological sources for example rapeseed oil, wood chip/pellets or gas from anaerobic digestion. It can only be considered as a renewable energy source if the carbon dioxide emitted from burning the fuel is later recaptured in reproducing the fuel source (i.e. trees that are grown to become wood fuel, capture carbon as they grow).

Biomass heating systems require space to site a boiler and fuel hopper along with a supply of fuel – which can be very bulky items. There also needs to be a local source of biomass fuel that can be delivered on a regular basis. There are also issues with fuel storage and delivery which mitigate against this technology.

Additionally, a boiler of this type would replace the need for a conventional gas boiler and therefore offset all the gas energy typically used for space and water heating. However, biomass releases high levels of NO_x emissions and particulate matters, as well as other pollutants and would therefore have to be considered carefully against the high standard of air quality requirements within Camden's Borough wide AQMA.

Accordingly, the use of biomass is not considered appropriate for this project.

6.6 Ground source heat pump

All heat pump technologies utilise electricity as the primary fuel source – in this case displacing gas, as such, the overall reduction in emissions when using this technology can be less effective when opposed to a technology that is actually displacing electricity.

Ground source heating or cooling requires a source of consistent ground temperature, which could be a vertical borehole or a spread of pipework loops and a 'heat pump'. The system uses a loop of fluid to collect the more constant temperature in the ground and transport it to a heat pump. In a cooling system this principle works in reverse and the heat is distributed into the ground.

The heat pump then generates increased temperatures by 'condensing' the heat taken from the ground, producing hot water temperatures in the region of 45°C. This water can then be used as pre-heated water for a conventional boiler or to provide space heating with an under-floor heating system.

The use of a ground source heating/cooling system will therefore require:

- Vertical borehole or ground loop
- Use of under floor heating
- Space for heat pump unit

Clearly, there is insufficient land area to install low level collector loops, leaving deep bore GSHP as the only potential option.

Normally the boreholes would need to be 6 to 8 metres apart and a 100-metre-deep borehole will only provide about 5kw of heat. The borehole should also be formed around 3m away from the perimeter of the building and most specialists don't recommend using the structural boreholes.

Clearly, in the case of the proposed development, there is little scope for the locating of the ground collector devices and as such, ground source heating cannot be considered.

6.7 Air source heat pump

Air source heating or cooling also employs the principle of a heat pump. This time either, upgrading the ambient external air temperature to provide higher temperatures for water and space heating, or taking warmth from within the building and dissipating it to the outdoor air.

It must be remembered that heat pumps utilise grid-based electricity, so calculations base the benefits on the current SAP10.2 emissions data

Assuming a seasonal system efficiency of 320% (Coefficient of Performance of 3.2) and that the air source heat pump will replace 100% of the space heating/hot water demand, then the system would reduce the overall CO_2 emissions by approximately 60%. The table below demonstrates, on the assumption of a demand of 1000Kwh/year for heating and hot water.

Table 6 – Air Source Heat Pump Performance

Type of Array	Energy Consumption (kWh/yr.)	Emission factor ($kgCO_2/h$)	Total CO_2 emissions (kg/annum)
90% efficient gas boiler	11111	0.210	2333
320% efficient ASHP	2813	0.136	383
100% efficient immersion (back-up)	1000	0.136	136

A theoretical carbon saving of 77%

With the above data in mind, clearly an ASHP could be an option and the "be green" proposals include the use of roof mounted air source heat pumps, connected to internal heat interface units in the flats to provide the heating and DHW and the heating to the commercial space (with DHW from point of use water heating)

Overall system efficiency has been advised at circa 350-360% and this figure has been used for the communal heating systems within the final energy calculations.

6.8 Final Emissions Calculation

Given the outcome of the feasibility study above, the developer is proposing the use the above noted air source heat pump system to deliver the heating and hot water demands to the development, as well as a roof mounted 20 panel PV array, a total 8.8kWp array generating some 7245.47kWh/annum.

The final table – Table 8 – summarises the final outputs from the SBEM & SAP models; attached at **Appendix C.**

Table 7 – "Be Green" emission levels

Unit	Total Regulated Emissions Kg/Annum	Total Unregulated Emissions Kg/Annum	Total Emissions Kg/Annum
Residential Extension	-562	547	-15
Commercial Spaces	1135	1878	3013
Development Total	**572**	**2,425**	**2,997**

The data at Table 7 confirms that overall emissions – including unregulated energy use - have been reduced by **56.22%** over and above the baseline model, with a **42.33%** reduction in emissions directly from the use of energy generating and renewable technologies, i.e., over and above the energy efficient model.

Excluding the un-regulated use, i.e., considering emissions controlled under AD Part L, then the final reduction in B&DER/TER equates to **87.06%.**

The SAP10 conversion spreadsheet is attached at **Appendix D.**

The Energy Use Intensity and space heating demand of the development – Table 8 below

Table 8 – Energy and Heat Demands

Building Type	Energy Use Intensity ($kWh/m^2/year$)	Space Heating ($kWh/m^2/year$)
Residential	20.92	10.36
Commercial Unit	49.34	4.93

7.0 Sustainable Design & Construction

The Sustainability credentials of the proposed residential and commercial development are set out below; based on the assessment criteria developed by the Building Research Establishment, specifically:

Materials

Clearly, the general principal of the refurbishment and extension of an existing building is sustainable by default – much reducing the embodied carbon content of the overall building.

New build construction techniques will be considered against the BRE Green Guide to ensure that, where practical, the most environmentally friendly construction techniques are deployed.

Construction materials will be sourced from suppliers capable of demonstrating a culture of responsible sourcing via environmental management certification, such as BES6001

Insulation materials will be selected that demonstrate the use of blowing agents with a low global warming potential, specifically, a rating of 5 or less. Additionally, all insulants used will demonstrate responsible sourcing of material and key processes.

The principal contractor with be required to produce a site waste management plan and sustainable procure plan, in line with BREEAM requirements – this will include a pre-demolition audit to identify demolition materials to reuse on-site or salvage appropriate materials to enable their reuse or recycling off-site. The procurement plan will follow the waste hierarchy Reduce; Reuse & Recycle.

A Site Waste Management Plan (SWMP) will be developed prior to commencement of development stage to inform the adoption of good practice waste minimisation in design. This will set targets to minimise the generation of non-hazardous construction waste using the sustainable procurement plan to avoid over-ordering and to use just-in-time delivery policies.

Operational waste and recycling – appropriate internal and external storage space will be provided to ensure that residents can sort, store and dispose of waste and recyclable materials in line with Camden's collection policies.

Pollution

The contractor will also monitor the use of energy and water use during the construction phase and incorporate best site practices to reduce the potential for air (dust) and ground water pollution.

The completed development will use zero emission heat pump systems for heating and hot water.

The main contractor will be required to register the site with the Considerate Constructors Scheme and achieve a best practice score of 25 or more.

To void the issue of noise pollution, the development will comply with Building Regulations Part E, providing a good level of sound insulation between the proposed development and surrounding buildings.

Energy

The development will incorporate renewables technologies as noted in the main report above.

The new homes will also be supplied with a Home User Guide offering practical advice on how to use the home economically and efficiently, including specific advice on how to reduce unregulated energy uses.

This will be further enhanced by the installation of smart energy metering, enabling occupants to accurately assess their energy usage and thereby, manage it.

Water

The development minimise water use as far as practicable by incorporating appropriate water efficiency and water recycling measures. The applicants will ensure that all dwellings meet the required level of 105 litres maximum daily allowable usage per person in accordance with Level 4 of the Code for Sustainable Homes.

The commercial spaces will reduce water use by a minimum of 25% against the BREEAM benchmarks.

Ecology and Biodiversity

Clearly, the existing site is 100% previously developed, so any improvement on this situation would increase biodiversity.

The development would employ an ecologist to consider the planting regime for the communal landscaped areas and an overall improvement in the levels of fauna and flora utilising indigenous species where possible and appropriate.

8.0 Conclusions

This report has detailed the baseline energy requirements for the proposed development, the reduction in energy demand as a result of energy efficiency measures and the potential to achieve further CO_2 reductions using renewable energy technologies.

The baseline results have shown that if the development was built to a standard to meet only the minimum requirements of current building regulations, the total amount of CO_2 emissions would be **6846Kg/year**.

Following the introduction of passive energy efficiency measures into the development, as detailed in section 4, the total amount of CO_2 emissions would be reduced to **5197Kg/year.**

There is also a requirement to reduce CO_2 emissions across the development using renewable or low-carbon energy sources. Therefore, the report has considered the feasibility of the following technologies:

- Wind turbines
- Solar hot water
- Photovoltaic systems
- Biomass heating
- CHP (Combined heat and power)
- Ground & Air source heating

The results of the assessment of suitable technologies relative to the nature, locations and type of development suggest that the most suitable solution to meeting reduction in CO_2 emissions would be via the use of heat pump driven, centrally based heating and hot water systems and the generation of electricity on site via an 8.8kwp PV array.

This has been used in the SAP and SBEM models (reproduced at **Appendix C**) for the development which have also been detailed above in Table 7, which show a final gross emission level of **2997Kg/year**, representing a total reduction in emission over the baseline model, taking into account unregulated energy, of **56.22%.**

In addition, the final SAP & BRUKL outputs at Appendix C demonstrate that the building achieves an overall improvement in regulated emissions over the Building Regulations Part L standards for regulated emissions of minimum of 87.06%.

The GLA Reporting Spreadsheet is attached at **Appendix D.**

Tables 9 -13 Demonstrate how the Barkat House project complies with the London Plan requirements and the GLA guidance relating to zero carbon development based up SAP10 emissions data.

Table 9 – Carbon Emission Reductions – Domestic Buildings

Key	Tonnes/annum
Baseline CO_2 emissions (Part L 2021 of the Building Regulations Compliant Development)	3.1
CO2 emissions after energy demand reduction (be lean)	1.6
CO2 emissions after energy demand reduction (be lean) AND heat network (be clean)	1.6
CO2 emissions after energy demand reduction (be lean) AND heat network (be clean) AND renewable energy (be green)	-0.6

Table 10 – Regulated Emissions Savings – domestic Buildings

	Regulated Carbon Dioxide Savings	
	(Tonnes CO2 per annum)	%
Savings from energy demand reduction	1.5	50.00
Savings from heat network	0.00	0.00
Savings from renewable energy	2.1	68.00
Total Cumulative Savings	3.7	118.00
	(Tonnes CO_2)	
Carbon Shortfall	-0.6	
Cumulative savings for off-set payment	-17	
Cash-in-lieu Contribution	**N/A**	

Table 11 – Carbon Emission Reductions – Non-domestic Buildings

Key	Tonnes/annum
Baseline CO_2 emissions (Part L 2021 of the Building Regulations Compliant Development)	1.3
CO2 emissions after energy demand reduction (be lean)	1.2
CO2 emissions after energy demand reduction (be lean) AND heat network (be clean)	1.2
CO2 emissions after energy demand reduction (be lean) AND heat network (be clean) AND renewable energy (be green)	1.1

Table 12 – Regulated Emissions Savings – Non-domestic Buildings

	Regulated Carbon Dioxide Savings	
	(Tonnes CO2 per annum)	%
Savings from energy demand reduction	0.1	8%
Savings from heat network	0.00	0%
Savings from renewable energy	0.1	6%
Total Cumulative Savings	0.2	14%
	(Tonnes CO_2)	
Carbon Shortfall	1.1	
Cumulative savings for off-set payment	34	
Cash-in-lieu Contribution	**N/A**	

Table 13: Site wide regulated carbon dioxide emissions and savings

	Total regulated emissions (Tonnes CO2/year)	CO2 savings (Tonnes CO2/year)	Percentage Saving (%)
Part L 2021 Baseline	4.4		
Be Lean	2.8	1.6	37.00
Be Clean	2.8	0.00	0.00
Be Green	0.6	2.2	50.00
		CO2 savings off-set (Tonnes CO2)	
Off-Set		**N/A**	

Appendix A

Baseline/Un-regulated Energy Use:-

SBEM & SAP Outputs & Target Emission Rates

Appendix B

Energy Efficient Design:-

SBEM & SAP Outputs & Dwelling Emission Rates

Appendix C

Generating energy on-site:-

Final SBEM & SAP Outputs & Dwelling Emission Rates

Appendix D

GLA Part L 2021 Reporting Spreadsheet