

Schedule of Works Key: PLANNING to be read in conjunction with schedule 383(SL) Listed Building Consent Schedule of Works, 11 01.310.11 - Existing non original lift overrun to be carefully taken down to allow new core to be installed, then rebuilt as existing section 01, sheet 310 12 01.310.12 - Existing loadbearing masonry spine walls to demolished in accordance with structural engineers specification Indicates original fabric to be 01.310.01 - Allow for existing doors to retail units to service yard elevation to be removed demolished. Refer to structural engineers 01.310.02 - Existing windows to rear elevation of Vernon / Sicilian House to be retained; strip out existing painting information for extent of structural 13 01.310.13 - Retained existing windows to rear elevation of 21 Southampton Row to be investigated, repaired and redecorated alterations to indicated areas and get ready for redecoration Indicates non orignal non structural 01.310.03 - Existing windows to Sicilian Avenue to be retained, existing paintwork to be stripped back ready for 14 01.310.14 - Existing roof finishes to 21 Southampton Row to be removed back to plywood deck redecoretion, plus existing secondary glazing to be removed partitions to be removed Indicates non structural elements that **04** 01.310.04 - Retained existing shop front glazing and doors to be redocorated 15 01.310.15 - Existing window to previously infilled stairwell to be retained in existing structural opening need to be removed / demolished 16 01.310.16 - New structural opening to be formed in existing ground floor slab for new retail staircase installation 05 01.310.05 - Retained existing GRP chimneys to be painted to match existing brickwork better Indicates areas of structural openings to be carefully created within existing slabs 06 01.310.06 - Existing dormers to be retained and repaired as required 17 01.310.17 - Existing redundant external plant to be removed in line with approved risk assessment and approved method statements 01.310.07 - Lift car, associated services and shaft to be removed entirely, but rooftop lift motor room to be 18 01.310.18 - Existing sub station to be retained Indicates areas of internal screed / finishes to be stripped back to bare structure in line with approved risk 01.310.08 - Existing key clamp handrail guarding to be removed and stored for reuse 19 01.310.19 - Existing railing and metal stair to be removed assessment and approved method statements **09** 01.310.09 - Existing rooftop plant to be removed completely 20 01.310.20 - Existing fire exit doors to be removed and structural opening to be enlarged to form new lobby Indicates areas of external floor finishes to be stripped back in line with approved (21) risk assessment and approved method 01.310.10 - Existing flat roof to Vernon & Sicilian House to be replaced entirely, comprising liquid applied 21 01.310.21 - New opening to be cut into the lift motor room roof for new AOV installation waterproofing, insulation, plywood deck, new timber joists, sitting on top of existing retained steels beams below Indicates areas where internal screed to be retained, areas will have reduced floor void with new raised access floor Indicates non original fabric to be carefully removed to allow for new core to be installed, then rebuilt as existing.

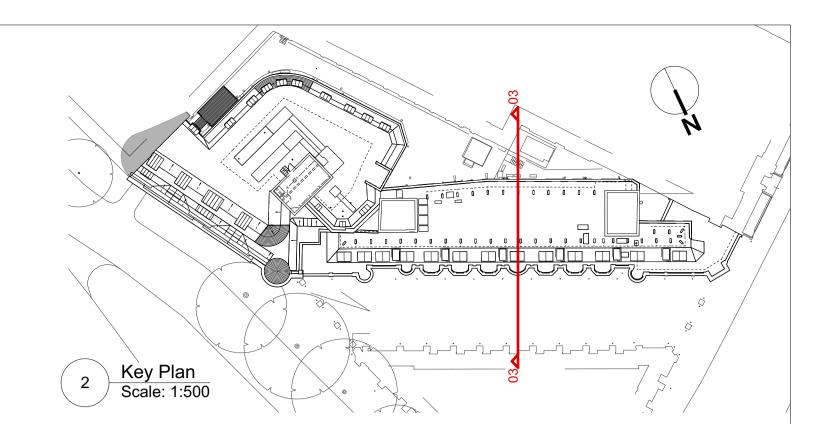

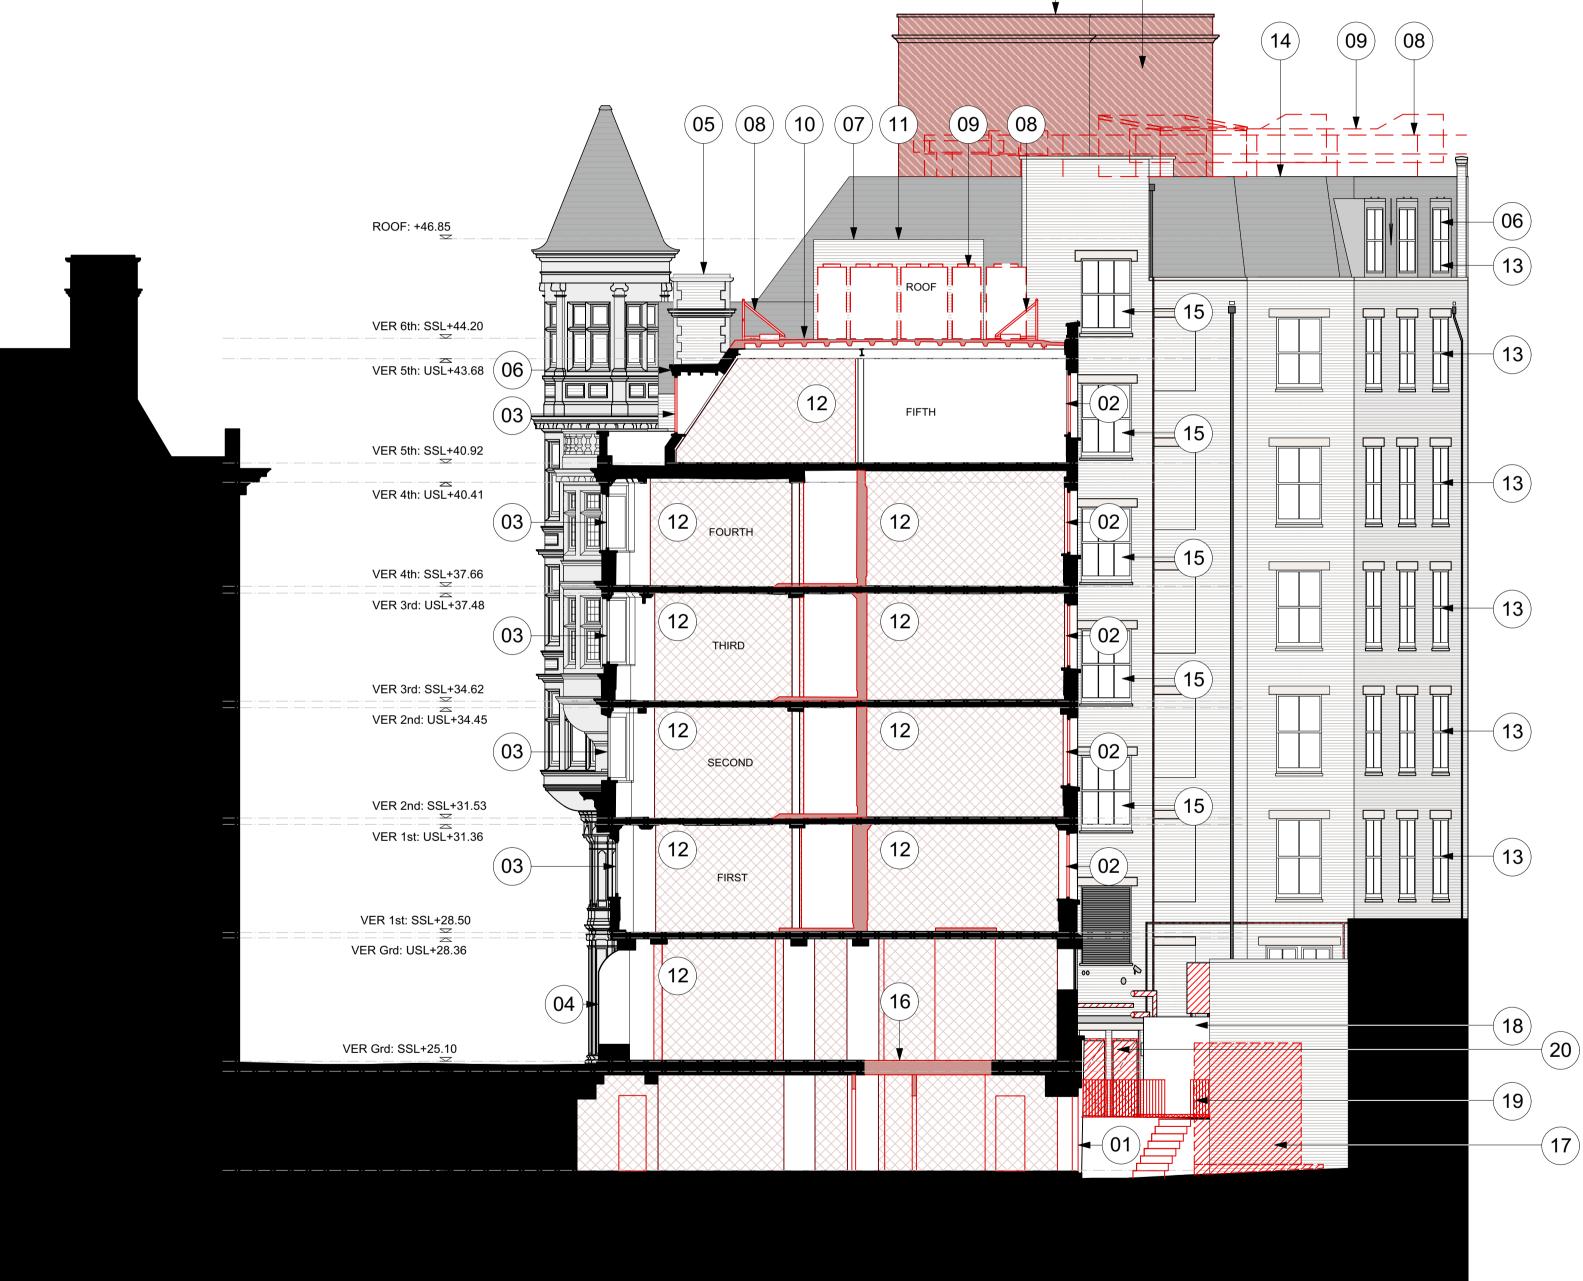

(11)

1 Vernon & Sicilian House Demolition Section 03
Scale: 1:100

0 5m 10m 20m

All dimensions to be checked on site prior to commencement of any works, a shop drawings.	ınd/or preparation of any
Sizes of and dimensions to any structural or services elements are indicative service engineers drawings for actual sizes / dimensions.	only. See structural and
This drawing to be read in conjunction with all other Architect's drawings, spe Consultants' information.	ecifications and other
All proprietary systems shown on this drawing are to be installed strictly in an Manufacturers/Suppliers recommended details.	cordance with the
Any discrepancies between information shown on this drawing and any other	r contract information or

nanufacturers/suppliers recommendations is to be brought to the attention of the Architect.

R	evision D	ate	Amendment	Date		Project	Job Ref
Р	1 2	2/07/2022	Issued for Planning	April 2022		Vernon House	383
Р	2 0	1/03/2023	Revisions as per agreed amendments	Scale Drawi	n Check	k Title	
				1:100 @A1 KP	DT	Ver/ Sic - Demolition Section 03	
				Status	Client Re	ef Drwg. no.	Rev.
				PLANNING	EDR	383 (DE) 310	PL-2
				Hale Brown Architects	Ltd. Unit 1.04	1, Edinburgh House, 170 Kennington Lane, London	n, SE11 5DI
				T : 020 3735 7442	E: mail@h	alebrown.com W: www.halebrown.com	