

# Construction/ Demolition Management Plan

pro forma

# Contents

Revisions	3
Introduction	4
Timeframe	6
<a href="#"><u>Contact</u></a>	7
<a href="#"><u>Site</u></a>	9
<a href="#"><u>Community liaison</u></a>	12
<a href="#"><u>Transport</u></a>	14
<a href="#"><u>Environment</u></a>	26
<a href="#"><u>Agreement</u></a>	31

# Revisions & additional material

Please list all iterations here:

Date	Version	Produced by
21/9/22	1	Alan Bush
13/1/23	updated	Alan Bush

## Additional sheets

Please note – the review process will be quicker if these are submitted as Word documents or searchable PDFs.

Date	Version	Produced by

# Introduction

The purpose of the **Construction Management Plan (CMP)** is to help developers to minimise construction impacts, and relates to all construction activity both on and off site that impacts on the wider environment.

It is intended to be a live document whereby different stages will be completed and submitted for application as the development progresses.

The completed and signed CMP must address the way in which any impacts associated with the proposed works, and any cumulative impacts of other nearby construction sites, will be mitigated and managed. The level of detail required in a CMP will depend on the scale and nature of development. Further policy guidance is set out in Camden Planning Guidance **(CPG) 6: Amenity** and **(CPG) 8: Planning Obligations**.

This CMP follows the best practice guidelines as described in the [Construction Logistics and Community Safety \(CLOCS\)](#) Standard and the [Guide for Contractors Working in Camden](#).

Camden charges a [fee](#) for the review and ongoing monitoring of CMPs. This is calculated on an individual basis according to the predicted officer time required to manage this process for a given site.

---

The approved contents of this CMP must be complied with unless otherwise agreed with the Council in writing. The project manager shall work with the Council to review this CMP if problems arise during construction. Any future revised plan must also be approved by the Council and complied with thereafter.

It should be noted that any agreed CMP does not prejudice or override the need to obtain any separate consents or approvals such as road closures or hoarding licences.

If your scheme involves any demolition, you need to make an application to the Council's Building Control Service. Please complete the "[Demolition Notice](#)."


Please complete the questions below with additional sheets, drawings and plans as required. The boxes will expand to accommodate the information provided, so please provide as much information as is necessary. It is preferable if this document, and all additional documents, are completed electronically and submitted as Word files to allow comments to be easily documented. These should be clearly referenced/linked to from the CMP. Please only provide the information requested that is relevant to a particular section.

(Note the term 'vehicles' used in this document refers to all vehicles associated with the implementation of the development, e.g. demolition, site clearance, delivery of plant & materials, construction etc.)

Revisions to this document may take place periodically.

**IMPORTANT NOTICE:** If your site falls within a Cumulative Impact Area (as of 03/02/2020 to 03/08/2020 there is only one established CIA for the Central London area) you are required to complete the CIA Checklist and circulate as an appendix to the CMP and included as part of any public consultation – a CMP submission will not be accepted until evidence of this has been supplied.


The CIA Checklist can be found at <https://www.camden.gov.uk/about-construction-management-plans>

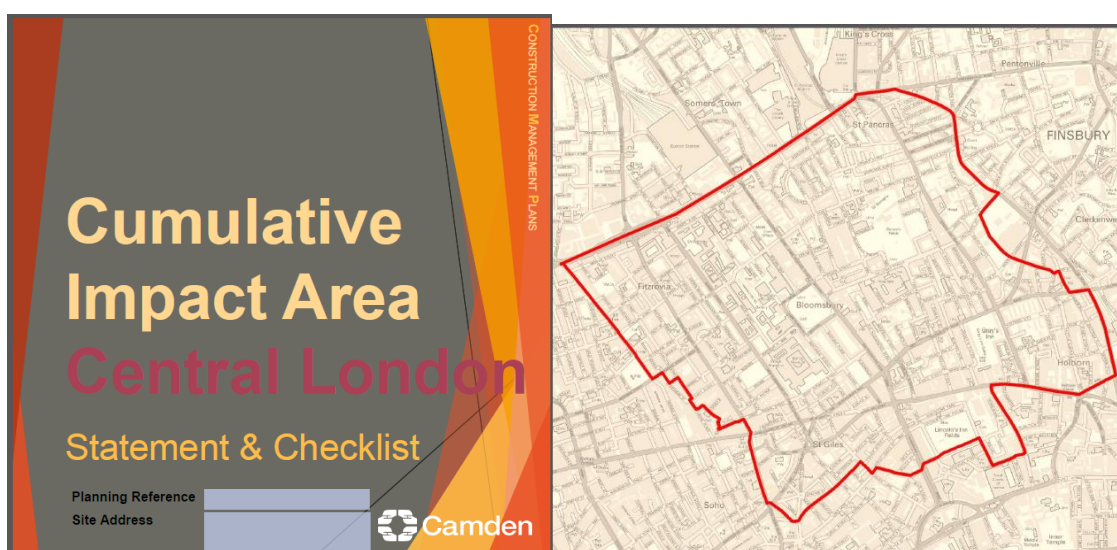

# Timeframe

## COUNCIL ACTIONS

## DEVELOPER ACTIONS

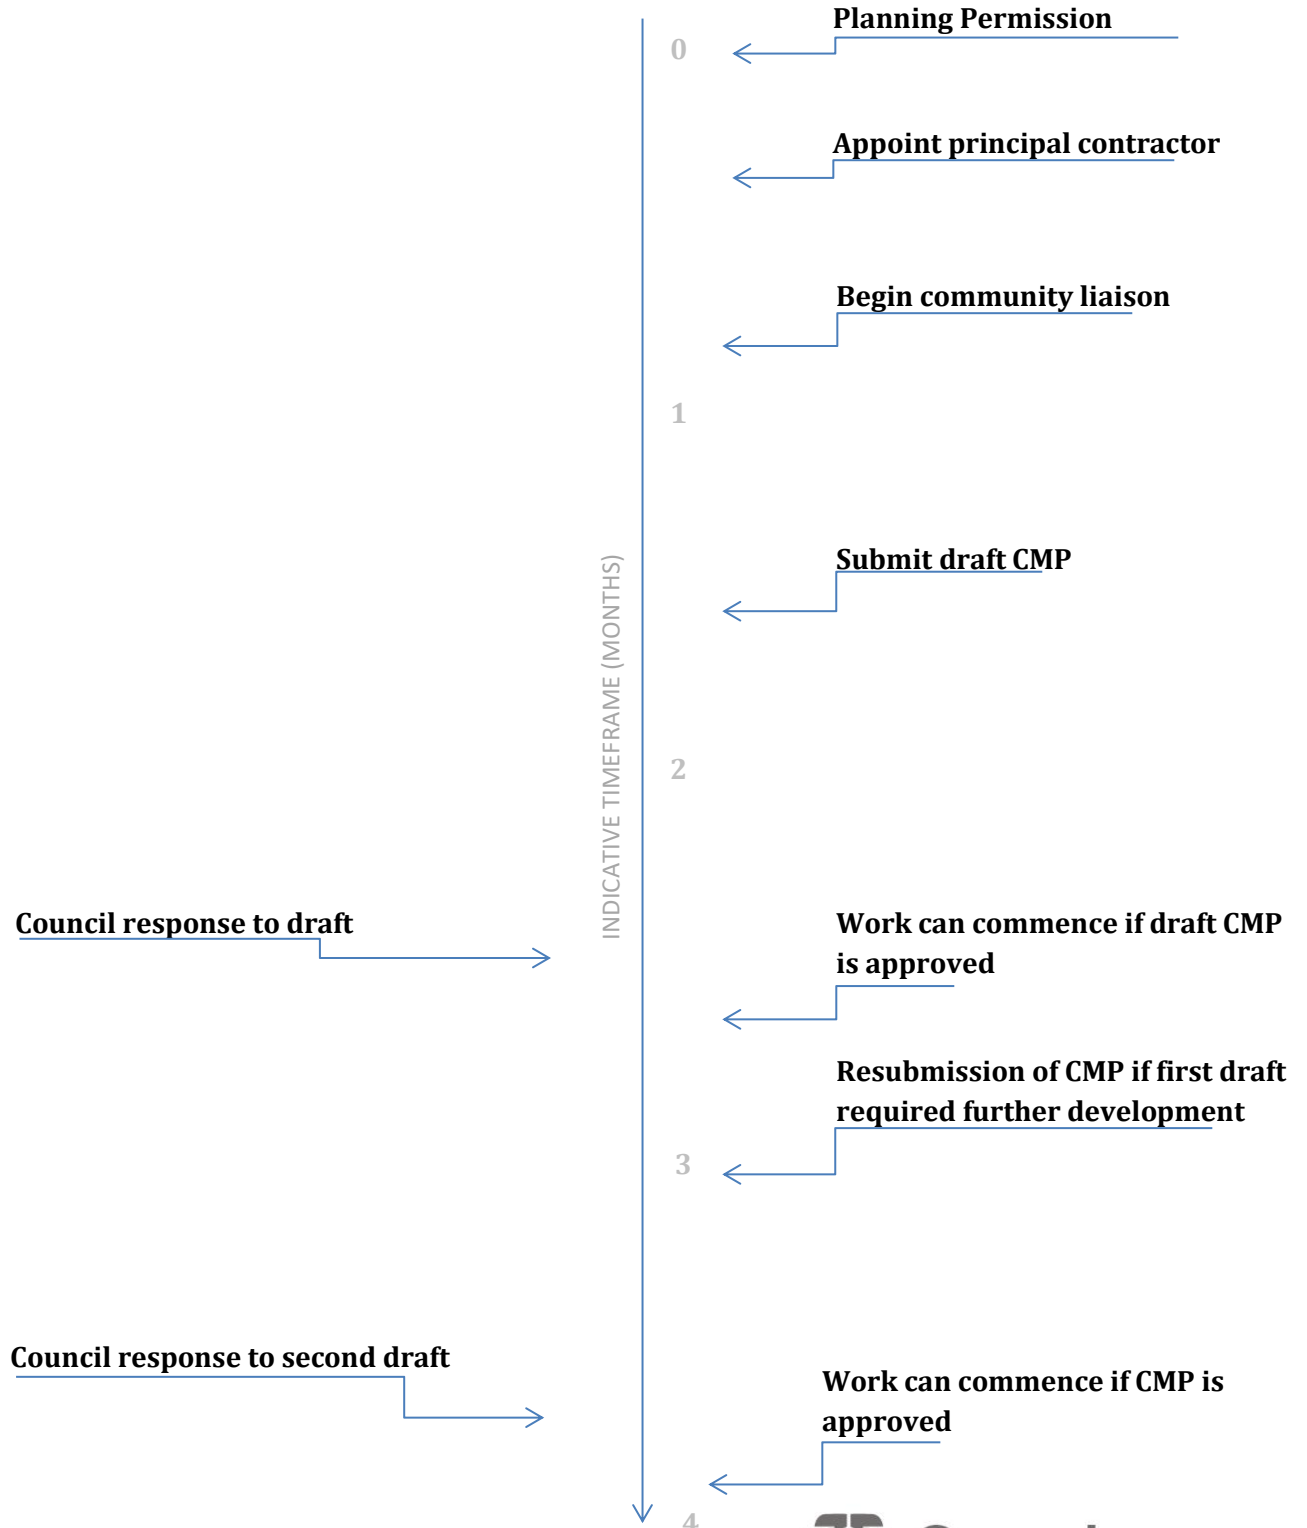

# Contact

1. Please provide the full postal address of the site and the planning reference relating to the construction works.

Address: Plots 5&6 Central Somerstown, Purchase Street, NW1 1EL

Planning reference number to which the CMP applies: 2022/2855/P

2. Please provide contact details for the person responsible for submitting the CMP.

Name: Alan Bush

Address: Morgan Sindall, 10<sup>th</sup> floor, 1 Eversholt Street, NW1

Email: alan.bush@morgansindall.com

Phone: 07976203713

3. Please provide full contact details of the site project manager responsible for day-to-day management of the works and dealing with any complaints from local residents and businesses.

Name: Alan Bush

Address: Morgan Sindall, 10<sup>th</sup> floor, 1 Eversholt Street, NW1

Email: alan.bush@morgansindall.com

Phone: 07976203713

4. Please provide full contact details of the person responsible for community liaison and dealing with any complaints from local residents and businesses if different from question 3. In the case of the Community Investment Programme (CIP), please provide the contact details of the Camden officer responsible.

Name: Monica Paul

Address: Morgan Sindall, 10<sup>th</sup> floor, 1 Eversholt Street, NW1

Email: Monica.Paul@morgansindall.com

Phone: 07977354264

5. Please provide full contact details including the address where the main contractor accepts receipt of legal documents for the person responsible for the implementation of the CMP.

Name: Alan Bush

Address: Morgan Sindall, 10<sup>th</sup> floor, 1 Eversholt Street, NW1

Email: alan.bush@morgansindall.com

Phone: 07976203713



# Site

6. Please provide a site location plan and a brief description of the site, surrounding area and development proposals for which the CMP applies.

The site is located in the Brill Place gardens and would be accessed from Purchase St which is a 2 way residential street with a cycle path.

As agreed the initial works (demolition of the community hall) access will be via Hampden Close.

7. Please provide a very brief description of the construction works including the size and nature of the development and details of the main issues and challenges (e.g. narrow streets, close proximity to residential dwellings etc).

This version of the CMP covers Demolition of the existing Community Hall on Hampden Close only. This will be carried out with no direct vehicle access from Purchase St. All Vehicle access to site will be via Hampden Close with all loading carried out within the site demise. An addendum to the CMP will be submitted for approval and discharge by Camden which will cover all subsequent phases of the works.

8. Please provide the proposed start and end dates for each phase of construction as well as an overall programme timescale. (A Gantt chart with key tasks, durations and milestones would be ideal).

Site set-up – 16/1/23

The following works will be covered in the addendum

Enabling works – 13/2/23

Substructure – 14/4/23

Superstructure – 27/9/23

Fit-out – 18/1/24

External works – 7/6/24

9. Please confirm the standard working hours for the site, noting that the standard working hours for construction sites in Camden are as follows:

- 8.00am to 6pm on Monday to Friday
- 8.00am to 1.00pm on Saturdays
- No working on Sundays or Public Holidays

As above

# Community Liaison

A neighbourhood consultation process must have been undertaken prior to submission of the CMP first draft.

This consultation must relate to construction impacts, and should take place following the granting of planning permission in the lead up to the submission of the CMP. A consultation process specifically relating to construction impacts must take place regardless of any prior consultations relating to planning matters. This consultation must include all of those individuals that stand to be affected by the proposed construction works. These individuals should be provided with a copy of the draft CMP, or a link to an online document. They should be given adequate time with which to respond to the draft CMP, and any subsequent amended drafts. Contact details which include a phone number and email address of the site manager should also be provided.

Significant time savings can be made by running an effective neighbourhood consultation process. This must be undertaken in the spirit of cooperation rather than one that is dictatorial and unsympathetic to the wellbeing of local residents and businesses.

These are most effective when initiated as early as possible and conducted in a manner that involves the local community. Involving locals in the discussion and decision making process helps with their understanding of what is being proposed in terms of the development process. **The consultation and discussion process should have already started, with the results incorporated into the CMP first draft submitted to the Council for discussion and sign off.** This communication should then be ongoing during the works, with neighbours and any community liaison groups being regularly updated with programmed works and any changes that may occur due to unforeseen circumstances through newsletters, emails and meetings.

Please note that for larger sites, details of a construction working group may be required as a separate S106 obligation. If this is necessary, it will be set out in the S106 Agreement as a separate requirement on the developer.

---

## Cumulative impact

Sites located within high concentrations of construction activity that will attract large numbers of vehicle movements and/or generate significant sustained noise levels should consider establishing contact with other sites in the vicinity in order to manage these impacts.

**The Council can advise on this if necessary.**

## 10. Sensitive/affected receptors

Please identify the nearest potential receptors (dwellings, business, etc.) likely to be affected by the activities on site (i.e. noise, vibration, dust, fumes, lighting etc.).

Residential properties and Edith Neville school on the South side of Purchase Street, Residents in Hampden Close and to the rear of the site which is adjacent to the rear of properties on Coopers Lane.

## 11. Consultation

The Council expects meaningful consultation. For large sites, this may mean two or more meetings with local residents **prior to submission of the first draft CMP**.

Evidence of who was consulted, how the consultation was conducted and a summary of the comments received in response to the consultation should be included. Details of meetings including minutes, lists of attendees etc. should be appended.

In response to the comments received, the CMP should then be amended where appropriate and, where not appropriate, a reason given. The revised CMP should also include a list of all the comments received. Developers are advised to check proposed approaches to consultation with the Council before carrying them out. If your site is on the boundary between boroughs then we would recommend contacting the relevant neighbouring planning authority.

Please provide details of consultation of the draft CMP with local residents, businesses, local groups (e.g. residents/tenants and business associations) and Ward Councillors.

The following table summarises the engagement which has taken place to date.

A separate consultation into any specific impacts relating to impacts on the public highway will be undertaken as part of the addendum. A separate consultation into any specific impacts relating to impacts on the public highway will be undertaken as part of the addendum.

Date	Event / purpose	Who attended
11 May 2022	Invitation to Coopers Lane TRA to meet and engage with the CST project, specifically Plots 5&6	Emailed note and invitation to Coopers Lane TRA committee members.
17 May 2022	Ward councillor site visit: walkaround and briefing about development projects in Somers Town. Bringing 2 new councillors up to speed.	<ul style="list-style-type: none"> <li>• Officers from Regeneration, Green Spaces and Housing</li> <li>• 2 of the 3 Somers Town ward councillors.</li> </ul>
20 May 2022	Purchase St Open Space public engagement event. Explaining the landscaping proposals to people using Purchase St Open Space and showing the development at Plots 5&6	<ul style="list-style-type: none"> <li>• Anne Wynne plus colleague from DHDSA/Levitt Bernstein,</li> <li>• Joe Lewis from Green Spaces.</li> <li>• Member of the public using the open space.</li> </ul>
1 Aug 2022	Online TRA engagement, Q&A briefing document produced in response to their queries.	<ul style="list-style-type: none"> <li>• Coopers Lane TRA and</li> <li>• CIP engagement officer</li> </ul>
3 Aug 2022	Ward councillor briefing about Plots 5&6 – replacement hall and garden for Coopers Lane.	<ul style="list-style-type: none"> <li>• 3 x ward councillors</li> <li>• briefed by officers ahead of the TRA meeting.</li> </ul>
8 Aug 2022	Coopers Lane TRA meeting	<ul style="list-style-type: none"> <li>• Officers from Regeneration and Housing met with the TRA committee to discuss the loss of their hall and garden and construction of Plots 5&amp;6</li> </ul>
24 Aug 2022	Public drop-in event held in the TRA hall. Consultation and engagement with the planned development.	<ul style="list-style-type: none"> <li>• DHDSA and LBC officers attended.</li> <li>• 2 of the 3 ward councillors</li> <li>• Around 50 local residents from Coopers Lane, Clyde Court, Phoenix Court, Charrington Street and Levitt House. (sign-in sheet available)</li> </ul>
26 Sept 2022	Meeting with Coopers Lane TRA regards design detail for replacement hall and garden	<ul style="list-style-type: none"> <li>• Coopers Lane TRA committee members</li> <li>• DHDSA, Levitt Bernstein (consultants)</li> <li>• LBC officers from Regeneration, Housing and Green spaces.</li> </ul>

## 12. Construction Working Group

For particularly sensitive/contentious sites, or sites located in areas where there are high levels of construction activity, it may be necessary to set up a construction working group.

If so, please provide details of the group that will be set up, the contact details of the person responsible for community liaison and how this will be advertised to the local community, and how the community will be updated on the upcoming works i.e. in the form of a newsletter/letter drop, or weekly drop in sessions for residents.

- Community Notice board to be displayed at the site boundary updating progress, notifying up and coming works, careers information, company profile, safety & environmental information
- We will register with Considerate Constructors Scheme
- Contact details will be displayed at the site boundary for information and complaints.
- Regular newsletter drops to neighbours

## 13. Schemes

Please provide details of your Considerate Constructors Scheme (CCS) registration. Please note that Camden requires [CCS site registration](#) for the full duration of your project including additional [CLOCS visits](#). Please provide the CCS site ID number that is specific to the above site.

Contractors will also be required to follow the [Guide for Contractors Working in Camden](#). Please confirm that you have read and understood this, and that you agree to abide by it.

The Considerate Constructors Scheme will also be adopted for the entirety of works on site. Contact details will be affixed to the front site hoarding indicating details of who to contact. This contact list will include names and numbers of staff on site should neighbours / the public require the need to contact a staff member.

## 14. Neighbouring sites

Please provide a plan of existing or anticipated construction sites in the local area and please state how your CMP takes into consideration and mitigates the cumulative impacts of construction in the vicinity of the site. The council can advise on this if necessary.

The Brill Place tower is due to complete March 2023 and this is in the corner of Brill Place gardens at the junction of Brill Place and Purchase St plot 7.

Landscaping of Brill Place Gardens between plots 6 and 7 is due to commence circa April 2023 with a programme of circa 6 months.

The works at plots 5&6 are low key until the Brill tower is complete with minor deliveries through site set-up and enabling works. The landscaping of Brill Place Gardens will run for 6 months whilst the substructure at plots 5&6 is being carried out, the landscaping is relatively minor works. We have met with designers and the client to discuss the impact and understand that cart away and delivery is minimal due to the presence of existing trees. Delivery routes for the Brill place tower are off Brill Place which is an adjacent street and the client's intention is to then use that site set-up to run/ manage the landscaping works so their deliveries and cart away will also be from Brill Place.



## Transport

**This section must be completed in conjunction with your principal contractor. If one is not yet assigned, please leave the relevant sections blank until such time when one has been appointed.**

Camden is a CLOCS Champion, and is committed to maximising road safety for Vulnerable Road Users (VRUs) as well as minimising negative environmental impacts created by motorised road traffic. As such, all vehicles and their drivers servicing construction sites within the borough are bound by the conditions laid out in the CLOCS Standard.

This section requires details of the way in which you intend to manage traffic servicing your site, including your road safety obligations with regard to VRU safety. It is your responsibility to ensure that your principal contractor is fully compliant with the terms laid out in the CLOCS Standard. It is your principal contractor's responsibility to ensure that all contractors and sub-contractors attending site are compliant with the terms laid out in the CLOCS Standard.

Checks of the proposed measures will be carried out by CCS monitors as part of your enhanced CCS site registration, and possibly council officers, to ensure compliance. Please refer to the CLOCS Standard when completing this section.

Please contact [CLOCS@camden.gov.uk](mailto:CLOCS@camden.gov.uk) for further advice or guidance on any aspect of this section.



## CLOCS Contractual Considerations

15. Name of Principal contractor:

Morgan Sindall

16. Please submit the proposed method for checking operational, vehicle and driver compliance with the CLOCS Standard throughout the duration of the contract.

Minimum standard Bronze

Record CLOCS on compliance for silver Check:-

Driver name, Date, Time, Vehicle Registration, Vehicle operator, FORS ID no. Evidence of SUD training for drivers of vehicles over 3.5t

Vehicles exceeding 3.5t:Vehicle

Class V + VI mirrors

Working camera and close proximity sensor system with in-cab audible alarm

(and rear camera for +7.5t rigid vehicles)

Side under-run protection (both sides)

Externally audible alert for vehicle turning left and reversing

Vulnerable road user warning signage

Route Check

Last mile route taken

Information about any collisions which occurred on journey to site.

Confirm access allowed or if denied issue letter to driver.

17. Please confirm that you as the client/developer and your principal contractor have read and understood the CLOCS Standard and included it in your contracts.

I confirm that I have included the requirement to abide by the CLOCS Standard in my contracts to my contractors and suppliers:

I confirm that I have included the requirement to abide by the CLOCS Standard in my contracts to my contractors and suppliers.

Please contact [CLOCS@camden.gov.uk](mailto:CLOCS@camden.gov.uk) for further advice or guidance on any aspect of this section.

## Site Traffic

Sections below shown in blue directly reference the CLOCS Standard requirements. The CLOCS Standard should be read in conjunction with this section.


**18. Traffic routing:** *“Clients shall ensure that a suitable, risk assessed vehicle route to the site is specified and that the route is communicated to all contractors and drivers. Clients shall make contractors and any other service suppliers aware that they are to use these routes at all times unless unavoidable diversions occur.” (P19, 3.4.5)*

Routes should be carefully considered and risk assessed, taking into account the need to avoid where possible any major cycle routes and trip generators such as schools, offices, stations, public buildings, museums etc.

Consideration should also be given to weight restrictions, low bridges and cumulative impacts of construction (including neighbouring construction sites) on the public highway network. The route(s) to and from the site should be suitable for the size of vehicles that are to be used.

Please show vehicle approach and departure routes between the site and the Transport for London Road Network (TLRN). Please note that routes may differ for articulated and rigid HGVs.

Routes should be shown clearly on a map, with approach and departure routes clearly marked. If this is attached, use the following space to reference its location in the appendices.

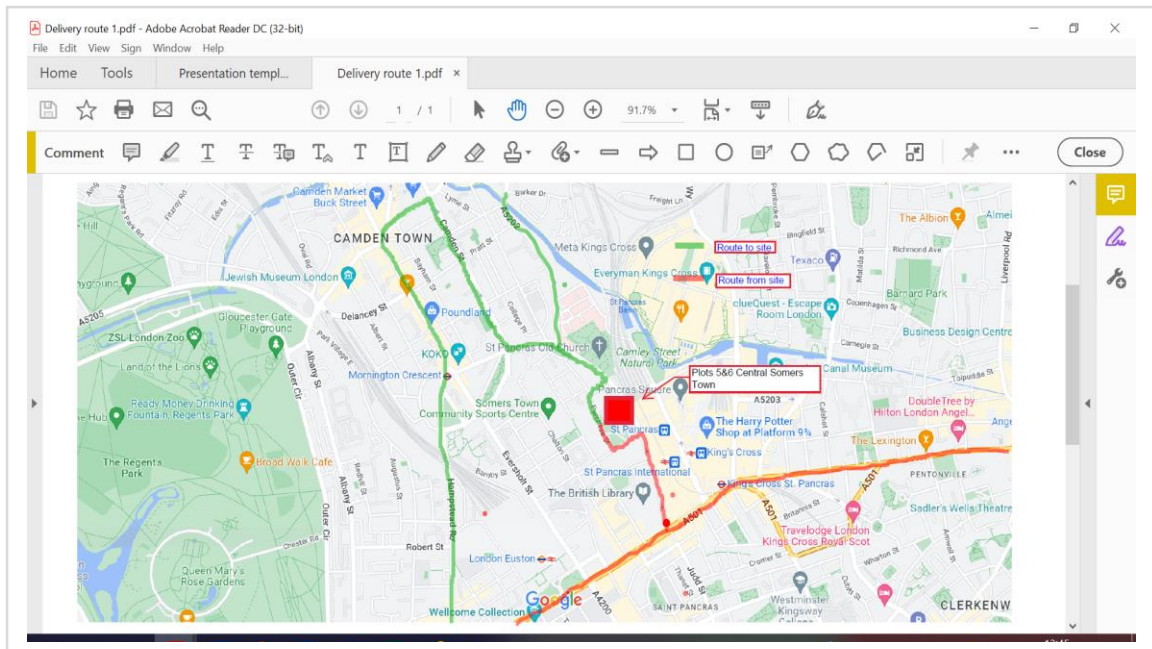

b. Please confirm how contractors and delivery companies will be made aware of the route (to and from the site) and of any on-site restrictions, prior to undertaking journeys.

Delivery route will be included in the subcontract orders.

### 19. Control of site traffic, particularly at peak hours: *"Clients shall consider other options to plan and control vehicles and reduce peak hour deliveries"* (P20, 3.4.6)

Construction vehicle movements should be restricted to the hours of 9.30am to 4.30pm on weekdays and between 8.00am and 1.00pm on Saturdays. If there is a school in the vicinity of the site or on the proposed access and/or egress routes, then deliveries must be restricted to the hours of 9.30am and 3pm on weekdays during term time.

Vehicles may be permitted to arrive at site at 8.00am if they can be accommodated on site. Where this is the case they must then wait with their engines switched off.

A delivery plan should ensure that deliveries arrive at the correct part of site at the correct time. Instructions explaining such a plan should be sent to all suppliers and contractors.

Please provide details of the types of vehicles required to service the site and the approximate number of deliveries per day for each vehicle type during the various phases of the project.

For Example:

32t Tipper: 10 deliveries/day during first 4 weeks  
Skip loader: 2 deliveries/week during first 10 weeks  
Artic: plant and tower crane delivery at start of project, 1 delivery/day during main construction phase project  
18t flatbed: 2 deliveries/week for duration of project  
3.5t van: 2 deliveries/day for duration of project

**Purchase Street is to become a healthy school street during the course of the construction works therefore our delivery arrangements will comply with this from the outset therefore during term time between 8 – 9.30am and 3 – 4pm there will be no deliveries scheduled.**

Roll off skips 6 per per day for demolition phase

Skips: 1 per day for the full duration of the project

3.5T van: 3 per day for the duration of the project

b. Cumulative effects of construction traffic servicing multiple sites should be minimised where possible. Please provide details of other developments in the local area or on the route that might require deliveries coordination between two or more sites. This is particularly relevant for sites in very constrained locations.

The Brill Place tower is due to complete March 2023 and this is in the corner of Brill Place gardens at the junction of Brill Place and Purchase St plot 7.

Landscaping of Brill Place Gardens between plots 6 and 7 is due to commence circa April 2023 with a programme of circa 6 months.

c. Please provide swept path analyses for constrained manoeuvres along the proposed route.

A5202 into Chenies Place and Brill Place back out onto A5202 are not considered to be constrained junctions. However, Chenies Place into Purchase St and Purchase St into Brill Place along with vehicles in and out of the Pit Lane and refuse vehicles into Hampden Close are included in the CMP pack.

d. Consideration should be given to the location of any necessary holding areas/waiting points for sites that can only accommodate one vehicle at a time/sites that are expected to receive large numbers of deliveries. Vehicles must not queue or circulate on the public highway. Whilst deliveries should be given set times to arrive, dwell and depart, no undue time pressures should be placed upon the driver at any time.

Please identify the locations of any off-site holding areas or waiting points. This can be a section of single yellow line that will allow the vehicle to wait to phone the site to check that the delivery can be accommodated.

Please refer to question 24 if any parking bay suspensions will be required to provide a holding area.

Not required

e. Delivery numbers should be minimised where possible. Please investigate the use of construction material consolidation centres, and/or delivery by water/rail if appropriate.

These have been reviewed and are not suitable for the project.

f. Emissions from engine idling should be minimised where possible. Please provide details of measures that will be taken to reduce delivery vehicle engine idling, both on and off site (this does not apply to concrete mixers).

Traffic marshals will ensure that all engines are switched off when manually off loading and signage will displayed to reflect this.

**20. Site access and egress:** *"Clients shall ensure that access to and egress from the site is appropriately managed, clearly marked, understood and clear of obstacles."* (P18, 3.4.3)

This section is only relevant where vehicles will be entering the site. Where vehicles are to load from the highway, please skip this section and refer to Q23.

Vehicles entering and leaving the site should be carefully managed, using gates that are clearly marked and free from obstacles. Traffic marshals must ensure the safe passage of all traffic on the public highway, in particular pedestrians and cyclists, when vehicles are entering and leaving site, particularly if reversing.

Traffic marshals, or site staff acting as traffic marshals, should hold the relevant qualifications required for directing large vehicles when reversing. Marshals should be equipped with 'STOP

– WORKS’ signs (not STOP/GO signs) if control of traffic on the public highway is required. Marshals should have radio contact with one another where necessary.

a. Please detail the proposed site access and egress points on a map or diagram. If this is attached, use the following space to reference its location in the appendices.

Please see attached site logistics layouts.

Access for demolition via Hampden Close.

b. Please describe how the access and egress arrangements for construction vehicles in and out of the site will be managed, including the number and location of traffic marshals where applicable. If this is shown in an attached drawing, use the following space to reference its location in the appendices.

Marshal(s) located in Hampden Close will oversee vehicles entering and exiting the site.

c. Please provide swept path drawings for vehicles accessing/egressing the site if necessary. If these are attached, use the following space to reference their location in the appendices.

d. Provision of wheel washing facilities should be considered if necessary. If so, please provide details of how this will be managed and any run-off controlled. Please note that wheel washing should only be used where strictly necessary, and that a clean, stable surface for loading should be used where possible.

Wheel wash facilities will be engaged for the Substructure works, we will be loading the muck wagons from a concrete hardstanding so this will require minimal wheel cleaning.

**21. Vehicle loading and unloading:** *“Clients shall ensure that vehicles are loaded and unloaded on-site as far as is practicable.” (P19, 3.4.4)*

This section is only relevant if loading/unloading is due to take place off-site on the public highway. If loading is taking place on site, please skip this section.

a. please provide details of the parking and loading arrangements for construction vehicles with regard to servicing and deliveries associated with the site (e.g. delivery of materials and plant, removal of excavated material). This is required as a scaled site plan, showing all points

of access and where materials, skips and plant will be stored, and how vehicles will access and egress the site. If this is attached, use the following space to reference its location in the appendices. Please outline in question 24 if any parking bay suspensions will be required.

Please see attached swept path drawings and logistics drawings, North and South access to Hampden Close refuse.

b. Where necessary, Traffic Marshalls must ensure the safe passage of pedestrians, cyclists and motor traffic in the street when vehicles are being loaded or unloaded. Please provide detail of the way in which marshals will assist with this process, if this differs from detail provided in Q20 b.

As question 20



## Street Works

**Full justification must be provided for proposed use of the public highway to facilitate works. Camden expects all options to minimise the impact on the public highway to have been fully considered prior to the submission of any proposal to occupy the highway for vehicle pit lanes, materials unloading/crane pick points, site welfare etc.**

**Please note that Temporary Traffic Orders (TTOs) and hoarding/scaffolding licenses may be applied for prior to CMP submission but won't be granted until the CMP is signed-off.**

**Please note that there is a two week period required for the statutory consultation process to take place as part of a TTO.**

**If the site is on or adjacent to the TLRN, please provide details of preliminary discussions with Transport for London in the relevant sections below.**

**If the site conflicts with a bus lane or bus stop, please provide details of preliminary discussions with Transport for London in the relevant sections below.**

### **22. Site set-up**

Please provide a scaled plan detailing the local highway network layout in the vicinity of the site. This should include details of on-street parking bay locations, cycle lanes, footway extents, relevant street furniture, and proposed site access locations. If these are attached, use the following space to reference their location in the appendices.

Please see block plan and swept path drawings included

### **23. Parking bay suspensions and temporary traffic orders**

Parking bay suspensions should only be requested where absolutely necessary and these are permitted for a maximum of 6 months only. For exclusive access longer than 6 months, you will be required to obtain a [Temporary Traffic Order \(TTO\)](#) for which there is a separate cost.

Please provide details of any proposed parking bay suspensions and/or TTO's which would be required to facilitate the construction - including details of the expected duration in months/weeks. Building materials and equipment must not cause obstructions on the highway as per your CCS obligations unless the requisite permissions are secured.

Information regarding parking suspensions can be found [here](#).

## 24. Occupation of the public highway

Please note that use of the public highway for storage, site accommodation or welfare facilities is at the discretion of the Council and is generally not permitted. If you propose such use you must supply full justification, setting out why it is impossible to allocate space on-site. We prefer not to close footways but if this is unavoidable, you should submit a scaled plan of the proposed diversion route showing key dimensions.

a. Please provide justification of the proposed occupation of the public highway.

b. Please provide accurate scaled drawings of any highway works necessary to enable construction to take place (e.g. construction of temporary vehicular accesses, removal of street furniture etc). If these are attached, use the following space to reference their location in the appendices.

## 25. Motor vehicle and/or cyclist diversions

Where applicable, please supply details of any diversion, disruption or other anticipated use of the public highway during the construction period. Please show locations of diversion signs on drawings or diagrams. If these are attached, use the following space to reference their location in the appendices.

Please see swept path, block plans and logistics attached.

## 26. Scaffolding, hoarding, and associated pedestrian diversions

Pedestrians safety must be maintained if diversions are put in place. Vulnerable footway users should also be considered. These include wheelchair users, the elderly, those with walking difficulties, young children, those with prams, the blind and partially sighted. Appropriate ramps must be used if cables, hoses, etc. are run across the footway.

Any work above ground floor level may require a covered walkway adjacent to the site. A licence must be obtained for scaffolding and gantries. The adjoining public highway must be

kept clean and free from obstructions, and hoarding should not restrict access to adjoining properties, including fire escape routes. Lighting and signage should be used on temporary structures/skips/hoardings etc.

A secure hoarding will generally be required at the site boundary with a lockable access.

a. Where applicable, please provide details of any hoarding and/or scaffolding that intrudes onto the public highway, describing how pedestrian safety will be maintained through the diversion, including any proposed alternative routes. Please provide detailed, scale drawings that show hoarding lines, gantries, crane locations, scaffolding, pedestrian routes, parking bay suspensions, remaining road width for vehicle movements, temporary vehicular accesses, ramps, barriers, signage, lighting etc. If these are attached, use the following space to reference their location in the appendices.

The hoarding will not impact the footway.

b. Please provide details of any other temporary structures which would overhang/oversail the public highway (e.g. scaffolding, gantries, cranes etc.) If these are attached, use the following space to reference their location in the appendices.

The hoarding will not impact the footway

## 27. Services

Please indicate if any changes to services are proposed to be carried out that would be linked to the site during the works (i.e. connections to public utilities and/or statutory undertakers' plant). Larger developments may require new utility services. If so, a strategy and programme for coordinating the connection of services will be required. If new utility services are required, please confirm which utility companies have been contacted (e.g. Thames Water, National Grid, EDF Energy, BT etc.) You must explore options for the utility companies to share the same excavations and traffic management proposals. Please supply details of your discussions.

Please see FLOH incoming services drawing and block plans included.



# Environment

To answer these sections please refer to the relevant sections of **Camden's Minimum Requirements for Building Construction ([CMRBC](#))**.

28. Please list all [noisy operations](#) and the construction method used, and provide details of the times that each of these are due to be carried out.

Demolition – 16/2/23  
Piling – 14/4/23  
Sub-structure – 14/4/23  
External works – 7/6/23  
Completion – 4/10/24

29. Please confirm when the most recent noise survey was carried out (before any works were carried out) and provide a copy. If a noise survey has not taken place please indicate the date (before any works are being carried out) that the noise survey will be taking place, and agree to provide a copy.

December 2022

30. Please provide predictions for [noise](#) and vibration levels throughout the proposed works.

Noise will not exceed 80db at the boundary and detectors will be used to monitor this in real time to allow immediate action if a breach is detected so that work methods can be changed to eliminate noise above 80db.

Vibration will not exceed the permissible level and there will be detectors at the boundary to monitor vibration to ensure this is not exceeded. Vibration predictions included.

31. Please provide details describing mitigation measures to be incorporated during the construction/[demolition](#) works to prevent noise and vibration disturbances from the activities on the site, including the actions to be taken in cases where these exceed the predicted levels.

The works will be carried out using the most noise efficient plant available such as a Brokk. This not only minimises noise and vibration to the general public but also the users as they are remote controlled. The noise will be constantly monitored to ensure that it doesn't exceed 80db at the boundary. Acoustic screens will be utilised if this does become an issue.

32. Please provide evidence that staff have been trained on BS 5228:2009

To be issued once subcontractor selection is completed.

33. Please provide specific details on how air pollution and dust nuisance arising from dusty activities on site will be prevented. This should be relevant and proportionate to activities due to take place, with a focus on both preventative and reactive mitigation measures.

Damping down of demolition areas and skips

Cover Skips.

Wet cutting of concrete and masonry.

Cat B extraction at point of cutting timber, dry masonry

Dust cubes at site boundaries (internally)

Ensure sand and other aggregates are stored in bunded areas  
and are not allowed to dry out.

Wheel washing for vehicles exiting site.

Use water-assisted dust sweeper(s) on access and local roads, to  
remove, as necessary, any material tracked out of the site.

No dry sweeping of large areas.

Sheeting to scaffolds.

Provide information and training to the workforce.

34. Please provide details describing how any significant amounts of dirt or dust that may be spread onto the public highway will be prevented and/or cleaned.

During the Sub-structure stage we will have facility to wheel wash any vehicles entering site before they go out onto the Highway but this is limited to muck and concrete wagons. Once the substructure is complete deliveries will be made via a paved pit-lane negating the need for those vehicles to enter site. Skips and smaller delivery vans will enter site onto a small paved enclosure which will be kept free from dust and mud negating the need to continue wheel washing.

35. Please provide details describing arrangements for monitoring of [noise](#), vibration and dust levels, including instrumentation, locations of monitors and trigger levels where appropriate.

Noise and dust sensors will be affixed to the hoarding line at the perimeter of the site adjacent to Purchase St, Hampden Close and the rear adjacent to the rear Gardens of Coopers Lane so 3 of each in total.

Vibration detectors will be used during the Demolition, Piling and substructure stage up to Ground floor slab. Placed at the boundary to Hampden Close and the rear gardens to Coopers Lane so 2 in total.

36. Please confirm that an Air Quality Assessment and/or Dust Risk Assessment has been undertaken at planning application stage in line with the GLA policy [The Control of Dust and Emissions During Demolition and Construction 2014 \(SPG\)](#) (document access at bottom of webpage), and that the summary dust impact risk level (without mitigation) has been identified. The risk assessment must take account of proximity to all human receptors and sensitive receptors (e.g. schools, care homes etc.), as detailed in the [SPG](#). **Please attach the risk assessment and mitigation checklist as an appendix.**

Yes December 2022, included.

37. Please confirm that all of the GLA's 'highly recommended' measures from the SPG document relative to the level of dust impact risk identified in question 36 have been addressed by completing the GLA mitigation measures checklist. (See Appendix 7 of the SPG document.)

Confirmed.

38. Please confirm the number of real-time dust monitors to be used on-site.

Note: **real-time dust (PM<sub>10</sub>) monitoring with MCERTS 'Indicative' monitoring equipment will be required for all sites with a high OR medium dust impact risk level.** If the site is a 'high

impact' site, 4 real time dust monitors will be required. If the site is a 'medium impact' site', 2 real time dust monitors will be required.

The dust monitoring must be in accordance with the SPG and IAQM guidance, and **the proposed dust monitoring regime (including number of monitors, locations, equipment specification, and trigger levels) must be submitted to the Council for approval.** Dust monitoring is required for the entire duration of the development and must be in place and operational **at least three months prior to the commencement of works on-site.** Monthly dust monitoring reports must be provided to the Council detailing activities during each monthly period, dust mitigation measures in place, monitoring data coverage, graphs of measured dust (PM<sub>10</sub>) concentrations, any exceedances of the trigger levels, and an explanation on the causes of any and all exceedances in addition to additional mitigation measures implemented to rectify these.

In accordance with Camden's Clean Air Action Plan, the monthly dust monitoring reports must also be made readily available and accessible online to members of the public soon after publication. Information on how to access the monthly dust monitoring reports should be advertised to the local community (e.g. presented on the site boundaries in full public view).

**Inadequate dust monitoring or reporting, or failure to limit trigger level exceedances, will be indicative of poor air quality and dust management and will lead to enforcement action.**

3 dust monitors will be used.

39. Please provide details about how rodents, including rats, will be prevented from spreading out from the site. You are required to provide information about site inspections carried out and present copies of receipts (if work undertaken).

The site welfare facilities will be inside the boundary of the site. These will be cleaned twice daily and any food debris removed, the facilities will be monitored by the site team and visiting SHEQ advisors and if at any time a rodent infestation is suspected a pest control contractor will be engaged to deal with the issue.

40. Please confirm when an asbestos survey was carried out at the site and include the key findings.



None undertaken to date, the site in the main is a brownfield site with a small portion of demolition to the Northwest corner. An R&D survey of this building will be undertaken and any recommendations carried out prior to commencement of demolition. The remainder of the site will undergo soils investigations to establish if there is asbestos in the ground and any recommendations carried out prior to dig.

41. Complaints often arise from the conduct of builders in an area. Please confirm steps being taken to minimise this e.g. provision of a suitable smoking area, tackling bad language and unnecessary shouting.

All operatives and site staff will undergo a comprehensive site induction where all the above will be discussed with clear site rules to tackle the issues.

Smoking will be in a designated area within the site hoarding away from Non-smokers with the necessary fire precautions in place.

Bad language is tackled in the induction and not tolerated with anyone offending being removed from site immediately.

Unnecessary shouting will be avoided with the use of radios.

42. If you will be using non-road mobile machinery (NRMM) on site with net power between 37kW and 560kW it will be required to meet the standards set out below. The standards are applicable to both variable and constant speed engines and apply for both PM and NOx emissions. See the Mayor of London webpage 'Non-Road Mobile Machinery (NRMM)' for more information, a map of the Central Activity Zone, and for links to the NRMM Register and the NRMM Practical guide (V4):

<https://www.london.gov.uk/what-we-do/environment/pollution-and-air-quality/nrmm>

Direct link to NRMM Practical Guide (V4):

[https://www.london.gov.uk/sites/default/files/nrmm\\_practical\\_guide\\_v4\\_sept20.pdf](https://www.london.gov.uk/sites/default/files/nrmm_practical_guide_v4_sept20.pdf)

**From 1<sup>st</sup> September 2015**

**(i) Major Development Sites** – NRMM used on the site of any major development will be required to meet Stage IIIA of EU Directive 97/68/EC

**(ii) Any development site within the Central Activity Zone** - NRMM used on any site within the Central Activity Zone will be required to meet Stage IIIB of EU Directive 97/68/EC

**From 1<sup>st</sup> September 2020**

**(iii) Any development site** - NRMM used on any site within Greater London will be required to meet Stage IIIB of EU Directive 97/68/EC

**(iv) Any development site within the Central Activity Zone - NRMM used on any site within the Central Activity Zone will be required to meet Stage IV of EU Directive 97/68/EC**

Please provide evidence demonstrating the above requirements will be met by answering the following questions:

- a) Construction time period (02/23 - 11/24):
- b) Is the development within the CAZ? (N):
- c) Will the NRMM with net power between 37kW and 560kW meet the standards outlined above? (Y):
- d) Please confirm that all relevant machinery will be registered on the NRMM Register, including the site name under which it has been registered: Yes and will be registered under Plots 5&6 CST
- e) Please confirm that an inventory of all NRMM will be kept on site and that all machinery will be regularly serviced and service logs kept on site for inspection: Yes
- f) Please confirm that records will be kept on site which details proof of emission limits, including legible photographs of individual engine plates for all equipment, and that this documentation will be made available to local authority officers as required: Yes

43. Vehicle engine idling (leaving engines running whilst parked or not in traffic) produces avoidable air pollution and can damage the health of drivers and local communities. Camden Council and the City of London Corporation lead the London **Idling Action Project** to educate drivers about the health impacts of air pollution and the importance of switching off engines as a simple action to help protect the health of all Londoners.

Idling Action calls for businesses and fleet operators to take the **Engines Off pledge** to reduce emissions and improve air quality by asking fleet drivers, employees and subcontractors to avoid idling their engines wherever possible. Free driver training materials are available from the website: <https://idlingaction.london/business/>

Please provide details about how you will reduce avoidable air pollution from engine idling, including whether your organisation has committed to the Engines Off pledge and the number of staff or subcontractors who have been provided with free training materials.



• SYMBOL IS FOR INTERNAL USE

# Agreement

The agreed contents of this Construction Management Plan must be complied with unless otherwise agreed in writing by the Council. This may require the CMP to be revised by the Developer and reapproved by the Council. The project manager shall work with the Council to review this Construction Management Plan if problems arise in relation to the construction of the development. Any future revised plan must be approved by the Council in writing and complied with thereafter.

It should be noted that any agreed Construction Management Plan does not prejudice further agreements that may be required such as road closures or hoarding licences.

**Signed:** .....Alan bush.....

**Date:** .....22/12/22.....

**Print Name:** .....ALAN BUSH...

**Position:** ...Project Manager.....

Please submit to: [planningobligations@camden.gov.uk](mailto:planningobligations@camden.gov.uk)

**End of form.**

V2.8