



Arboricultural Method Statement

Vasanth Padaki

**18 Aberdare Gardens
London
NW6 3PY**

15 April 2025

Chris Wren BSc (Hons) MArborA

Table of Contents

Introduction.....	4
Tree Survey.....	6
Arboricultural Impact Assessment.....	7
Trees to be Removed.....	8
Arboricultural Method Statement	9
Tree Work	10
Protected Species (general informative for tree works)	11
Sequencing of works.....	12
Protective Measures.....	13
Construction.....	17
Prohibition	19
Site Management	20
Services	21
Landscaping	22
Monitoring and Supervision.....	23
Arboricultural Monitoring & Supervision Sign-Off Checklist.....	25
Appendices.....	27
Appendix 1: Tree Schedule.....	28
Appendix 2: Arboricultural Impact Assessment	32
Appendix 3: Tree Protection Plan	34
Appendix 4: Tree Protection Notice.....	36
Appendix 5: Contact Details.....	38
Document Production Record	40

Table 1: Documents referred to	5
Table 2: Documents upon which this tree survey has been based	6
Table 3: Documents upon which this tree survey has been based	7
Table 4: Impacts upon the RPAs of retained trees	7
Table 5: Number of individual trees to be removed	8
Table 6: Number of groups to be removed.....	8
Table 7: Documents upon which this tree survey has been based	9
Table 8: Summary of tree works	10
Table 9: Sequencing of works.....	12
Figure 1: OS Map showing the site location (Bing Maps).....	4
Figure 2: Example of protective barrier fencing with above-ground stabilising system (BS5837).....	15

Introduction

Arbtech Consulting Limited (Arbtech) received written instruction on 31 March 2025 from Vasanth Padaki to attend 18 Aberdare Gardens, London, NW6 3PY (the site) to undertake an arboricultural survey guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction – Recommendations of all trees, hedges and major shrub groups growing on and/or within influencing distance of the site and to produce a Schedule of Trees, Tree Constraints Plan (TCP), Arboricultural Impact Assessment (AIA), Arboricultural Method Statement (AMS) and Tree Protection Plan (TPP).

Executive Summary

This report describes the extent and effect of the proposed development on individual trees and groups of trees within and adjacent to the site.

Trees within the site were surveyed using a methodology guided by British Standard 5837:2012 'Trees in relation to design, demolition and construction – Recommendations' ("BS5837").

Subsequently, this report has been produced, balancing the layout of the proposed development against the competing needs of trees. This report comprises all of the requisite elements of an arboricultural implications assessment, method statement and supporting plans.

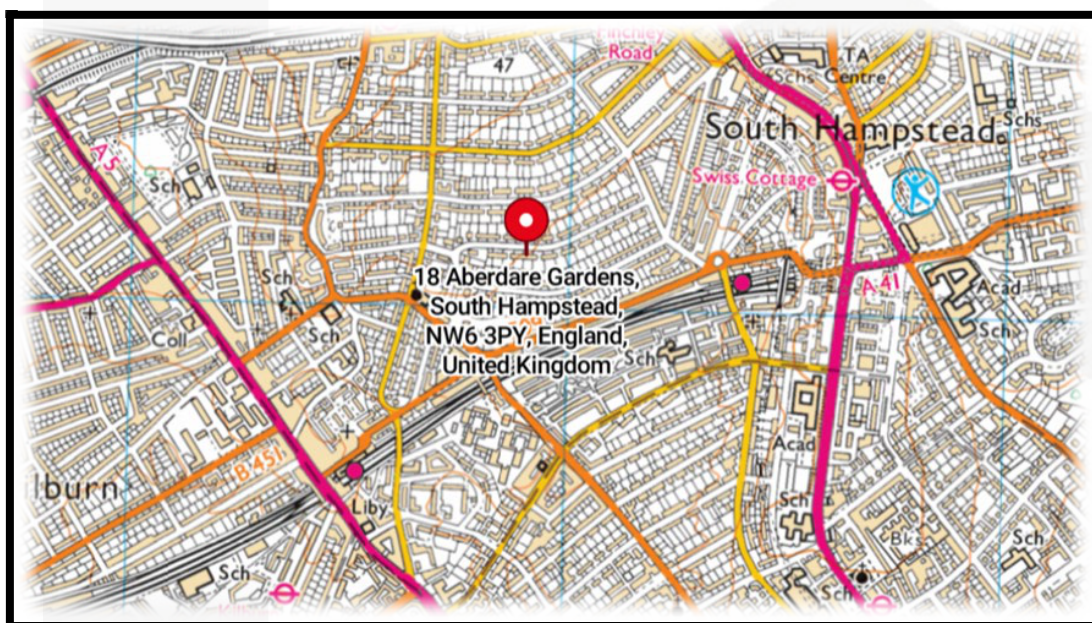


Figure 1: OS Map showing the site location (Bing Maps)

Site Description: The site is an occupied ground floor flat located in a residential urban area in north London.

Proposed Scheme

Construction of garden studio and shed with associated soft landscaping and decking.

Checklist for submission to Local Planning Authority

Tree Survey (including schedule)	✓
Tree Constraints Plan (TCP)	✓
Arboricultural Impact Assessment (AIA)	✓
Arboricultural Method Statement (AMS)	✓
Tree Protection Plan (TPP)	✓

This report and its appendices precisely follow the strategy for arboricultural appraisal intended to provide local planning authorities with evidence that trees have been properly considered throughout the development process.

It is the conclusion of this report that the overall quality and longevity of the amenity contribution provided for by the trees and groups of trees within and adjacent to the site will not be adversely affected as a result of the local planning authority consenting to the proposed development. It is considered that any issues raised in this report, or beyond the scope of it, can be dealt with by planning conditions.

Table 1: Documents referred to

Document	Reference No.
Survey base drawing	OS tile
Proposed layout drawing	781/01
Proposed elevation drawings	250200335TGOSA
British Standard 5837:2012	“BS5837”
Tree Survey Schedule	Arbtech TS 01
Arboricultural Impact Assessment	Arbtech AIA 01
Tree Protection Plan	Arbtech TPP 01

Tree Survey

An arboricultural survey guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction - Recommendations of all trees within impacting distance of the site was undertaken by Anthony Jones on 07 April 2025.

A total of 13no. individual trees were surveyed.

For full details of all the trees surveyed, see Appendix 1: Tree Schedule.

Table 2: Documents upon which this tree survey has been based

Document	Originator	Reference Number	Title
Survey base drawing	--	OS tile	--

Survey Limitations: The survey was made at ground level using visual observation only. Detailed examinations, such as climbing inspections and advanced decay detection equipment, were not employed, though they may form part of the survey's management recommendations. Measurements were taken using specialist tapes, lasers, and GPS devices. Where this was not possible, measurements are estimated. Inaccessible trees will have the best estimates made about their location, physical dimensions, and characteristics. Trees have been grouped where BS5837 guides us that it is expedient to do so. Trees have been excluded from the survey if they are found by us to be sufficiently far away from the proposed developable area or if they are outside of the red line boundary plan showing the expectations of our client for the extent of the survey.

Scope: Pre-development tree surveys make arboricultural management recommendations based exclusively upon the condition of the individual tree or group of trees relative to their present context (*i.e., not in relation to the proposed development*).

Legal Status: No statutory protection check has been performed. BS5837 does not draw any distinction between trees subject to statutory protection, such as a Tree Preservation Order ("TPO"), and those trees without, starting at Annex B:

The potential effect of development on trees, whether statutorily protected (e.g. by a tree preservation order or by their inclusion within a conservation area) or not, is a material consideration that is taken into account in dealing with planning applications. Consequently, we do not seek to offer any comparison between or infer any difference in the quality or importance of TPO trees and other trees.

Arboricultural Impact Assessment

An Arboricultural Impact Assessment (AIA), guided by British Standard 5837:2012: Trees in Relation to Design, Demolition and Construction - Recommendations, was undertaken by Chris Wren on 14th April 2025 to determine the potential conflicts between the proposed development scheme and existing trees located on and near the site and has subsequently produced this Arboricultural Method Statement to demonstrate how the proposed scheme can be successfully implemented without causing harm to retained trees.

Table 3: Documents upon which this tree survey has been based

Document	Originator	Reference Number	Title
Survey base drawing	--	OS tile	--
Proposed layout drawing	Locorum &	781/01	Layout Plan 1
Proposed elevation drawings	Becky Harper	250200335TGOSA	Vasanth Padaki

Several issues may need to be addressed in an Arboricultural Impact Assessment between the trees and the proposed development; these are as follows:

- The effect and extent of the proposed development within the root protection areas (RPAs) of retained trees;
- The potential conflicts of the proposed development with canopies of retained trees and;
- The likelihood of any future remedial works to retained trees beyond those that would have been scheduled as part of usual management.

Table 4: Impacts upon the RPAs of retained trees

Tree Number	Species	Structure	RPA (m2)	Incursion	
				(m2)	(%)
T02	Monterey Cypress	Garden Studio	191.1	12.9	6.7
T02	Monterey Cypress	Decking	191.1	Negligible	<1%
T04	Common Lime	Decking	55.4	Negligible	<1%
T05	Common Lime	Garden Studio	65.3	1.4	2.1
T05	Common Lime	Decking	65.3	Negligible	<1%
T06	Common Lime	Garden Studio	95.7	18.8	19.6
T06	Common Lime	Decking	95.7	Negligible	<1%
T07	Common Lime	Garden Studio	83.6	15.3	18.3
T08	Common Lime	Garden Studio	87.6	4.3	4.9

These impacts can be seen on the Arboricultural Impact Assessment (Arbtech AIA 01). See Appendix 2: Arboricultural Impact Assessment.

Trees to be Removed

A total of 0 individual trees will require removal as part of this proposed scheme.

A breakdown of all tree works can be seen in Table 8: Summary of tree works.

Table 5: Number of individual trees to be removed

U	A	B	C
0	0	0	0

Table 6: Number of groups to be removed

U	A	B	C
0(0)	0(0)	0(0)	0(0)

() = partial removal of a group

Canopy cover is ecologically important and the loss of canopy cover by this tree will be mitigated with planting within the development.

Arboricultural Method Statement

This Arboricultural Method Statement (Arbtech AMS 01) demonstrates how any aspect of the development that could potentially result in tree loss or damage may be implemented and provides an adequate level of protection for trees that are to be retained during the proposed works.

Details of key site personnel, including the Site/Project Manager, will be submitted to the Council's Tree Officer before site works commence. This Arboricultural Method Statement (Arbtech AMS 01) is to be approved and agreed to in writing by all key personnel before the commencement of any site works.

No site personnel are to be present, and no demolition, site clearance, building work, or material delivery is to occur until the protective measures are in accordance with this Arboricultural Method Statement (Arbtech AMS 01) and the Tree Protection Plan (Arbtech TPP 01). Unless otherwise specified, protective measures will remain unaltered and in situ for the entire duration of the construction.

Table 7: Documents upon which this tree survey has been based

Document	Originator	Reference Number	Title
Survey base drawing	--	OS tile	--
Proposed layout drawing	Locorum &	781/01	Layout Plan 1
Proposed elevation drawings	Becky Harper	250200335TGOSA	Vasanth Padaki

Tree Work

For reasons of public safety, all tree works referred to herein must be carried out before site personnel commence work or building materials are delivered.

Table 8: Summary of tree works

Tree Number	Species	Works	Category
T02	Monterey Cypress	Prune: Raise the crowns as required to give a minimum ground clearance of 4m over the garden	B1
T04	Common Lime	Prune: Raise the crowns as required to give a minimum ground clearance of 4m over the garden	B2
T06	Common Lime	Prune: Raise the crowns as required to give a minimum ground clearance of 4m over the garden	C2
T07	Common Lime	Prune: Raise the crowns as required to give a minimum ground clearance of 4m over the garden	B2
T08	Common Lime	Prune: Raise the crowns as required to give a minimum ground clearance of 4m over the garden	B2

Notes

All tree work is to be undertaken in accordance with British Standard BS 3998:2010 - Recommendations for tree work. All arising's are to be removed, and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber Lorries, tractors, excavators, or cranes shall be parked or driven beneath the crowns of any retained trees to prevent subsequent compaction and root death.

Protected Species (general informative for tree works)

Conservation Status of British Bats

The consensus in Britain and Europe is that virtually all bat species are declining and vulnerable. Our understanding of population status is poor as there is very little historical data for most bat species. Certain species, such as the horseshoe bats, are better understood and have well-documented contractions in range and population size. Given this general picture of decline in the UK Government, the UK Biodiversity Action Plan has designated five species of bats as priority species (greater and lesser horseshoe bats, barbastelle, Bechstein's, and pipistrelle). These plans provide an action pathway for investigating the maintenance and restoration of the former populations' levels.

Legal Status of British Bats

Given the above position, all British bats, as well as their breeding sites and resting places, enjoy national and international protection. All bat species in the UK are fully protected under the Wildlife and Countryside Act 1981 (as amended) through inclusion in Schedule 5. All bats are also listed in Annex IV (and some in Annex II) of the EC Habitats Directive, giving further European protection. Taken together, the Act and Conservation of Habitats and Species Regulations 2012 (as amended)* make it an offence to intentionally or deliberately kill, injure or capture (take) bats;

- Deliberately disturb bats (whether in a roost or not);
- Damage, destroy or obstruct access to bat roosts;
- Possess or transport a bat or any part of a bat unless acquired legally;
- Sell, barter or exchange bats or parts of bats

Although the legislation does not strictly protect foraging grounds, it does protect roost sites. Bat roosts are protected at all times of the year, whether or not bats are present. Any disturbance of a roost due to development must be licenced.

**the regulations that delivered by the UK's commitments to the Habitats Directive.*

Breeding Birds

All nesting birds are protected under the Wildlife and Countryside Act (as amended) 1981, which makes it an offence to intentionally kill, injure or take any wild bird or take, damage or destroy its nest whilst in use or being built, or take or destroy its eggs. Furthermore, several birds enjoy further protection under that Act and are listed on Schedule 1 of the Act. These further protected birds are also protected from disturbance and it may be necessary to operate "no-go" buffer zones around such nests – typically out to 100m. Planning policy guidance on the treatment of species identified as priorities under the biodiversity action programme suggests that local authorities should take measures to protect the habitats of these species from further decline through policies in local development documents and should ensure that they are protected from the adverse effects of development, where appropriate, by using planning conditions or obligations. The conservation of these species should be promoted through the incorporation of beneficial biodiversity designs within developments.

Sequencing of works

A logical sequence of events is to be observed and shall be phased as follows:

Table 9: Sequencing of works

Stage	Event
Stage 1.	Undertake and complete tree works as specified within Table 8: Summary of tree works
Stage 2.	Installation of protective measures in accordance with the approved Tree Protection Plan(s) (Arbtech TPP 01).
Stage 3.	Undertake and complete ground works.
Stage 4.	Undertake and complete construction works
Stage 5.	Undertake and complete external landscaping outside of the construction exclusion zones (CEZs).
Stage 6.	Removal of all machinery and materials from the site.
Stage 7.	Dismantle and removal of protective tree measures.
Stage 8.	Undertake and complete external landscaping within the construction exclusion zones (CEZs).
Stage 9.	Site completion and sign-off from Project Arboriculturalist.

Protective Measures

Protective measures are to be installed immediately following the completion of the tree works and sited and aligned in accordance with the Tree Protection Plan (Arbtech TPP 01) before the commencement of any works or the introduction of any machinery or material to the site.

Upon installing the protective measures around the retained trees, the client will instruct on a pre-commencement site meeting, during which the Project Arboriculturist will visit the site to inspect and document the position and specifications of the protective measures.

If the protective measures and their positions do not comply with this Arboricultural Method Statement (Arbtech AMS 01) dated: 15 April 2025 and Tree Protection Plan (Arbtech TPP 01), the Project Arboriculturist shall inform the client and Fencing Contractor so adjustments can be made.

When the protective measures comply with this Arboricultural Method Statement (Arbtech AMS 01) and Tree Protection Plan (Arbtech TPP 01), the Project Arboriculturist will sign-off the protective measures in writing to the client for which a copy can be sent to the Fencing Contractor, Site Agent and Local Authority Tree Officer.

If the protective measures become damaged or there is an accident or emergency involving trees, these areas are to be cordoned off immediately with high-visibility plastic mesh fencing. The site agent is to photograph and document the damage and inform the Project Arboriculturist immediately after the incident. All work within this area is to cease until the Project Arboriculturist has visited the site. Any damaged sections of protective measures shall be replaced within 48 hours of the initial incident.

The protected area is sacrosanct and will not be invaded by the storage of materials, the mixing of concrete or other products, the access of machinery, equipment, or pedestrians, or any other way disturbed by construction activity.

The protective measures will remain in place until the completion of Stage 6 (see Table 9: Sequencing of works) thereafter, they will be carefully dismantled only with the agreement of the Project Arboriculturist and or the Local Authority Tree Officer.

The existing site boundary measures are to be retained for the duration of the development. If, for any reason, the existing boundary measures are not to be used, protective barrier fencing is to be installed along the line of the boundaries and is only to be removed upon the written permission of the Project Arboriculturist upon the completion of the development or immediately before the installation of the permanent boundary measures.

No equipment, vehicles, or plant shall operate beyond the tree protection fencing. Booms, hoists, and rigs should be kept as far away from the canopies of retained trees as possible at all times. Where it is necessary to operate within 5m of a tree canopy, it will be done with the utmost caution and under the control of a banksman. Damage to trees will be considered a breach of this Tree Protection Plan and Arboricultural Method Statement, which in turn could be a breach of planning permission.

Construction Exclusion Zone

A construction exclusion zone (CEZ), as designated by the protective barrier fencing, is an area where there is to be no construction activity. Access to the area for construction personnel or machinery is strictly prohibited unless detailed in the tree protection plan, and there is no scope for materials or waste storage, welfare facilities, etc. There may be some construction activities planned for these areas (e.g. the installation of service trenches) these activities will be undertaken under the direct supervision of the Project Arboriculturalist.

Protective Barrier Fencing

Protective barrier fencing should be appropriate for the intensity and proximity of the development to protect trees where development activity is nearby.

The protective barrier fencing will be fixed with signage denoting the words “tree protection area” at 5.0m intervals. See Appendix 4: Tree Protection Notice

The fence will comprise either a 2.4m wooden site hoarding or 2m tall welded mesh panels on rubber or concrete feet. The panels are to be joined together using a minimum of two anti-tamper couplers installed so that they can only be removed from inside the fence. The panels will be supported on the inner side by stabiliser struts, which will be attached to a base plate and secured with ground pins.

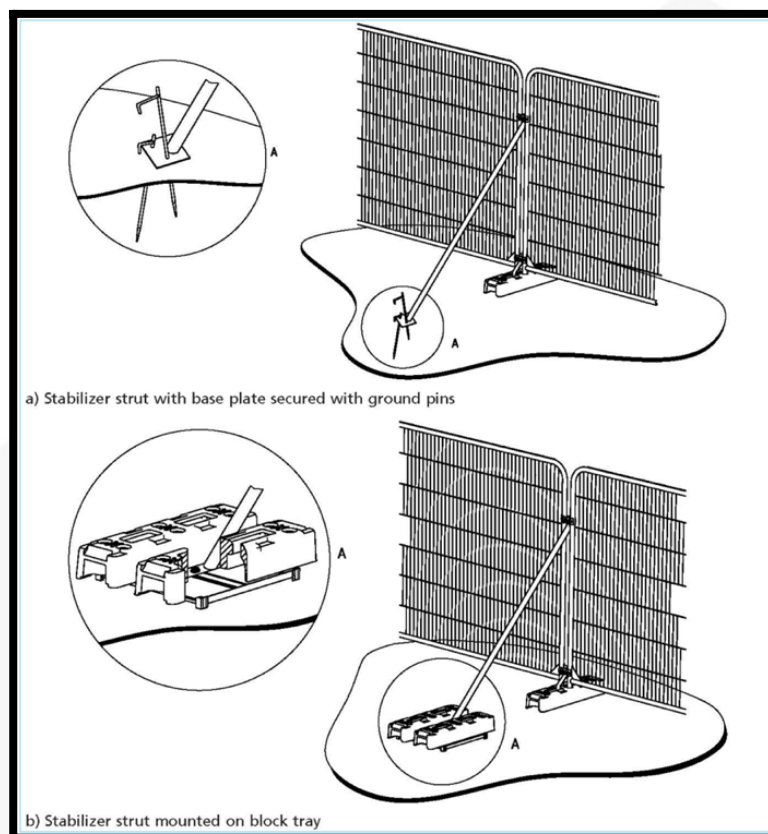


Figure 2: Example of protective barrier fencing with above-ground stabilising system (BS5837)

Trunk Protection

Protective trunk wrapping: Protective trunk wrapping is to comprise a minimum of three wrappings of clean, dry hessian around the trunk from ground level up to 2.4m high and held in place with sisal. Onto the hessian, there is to be a minimum of three wraps of chestnut paling around the trunk; the chestnut paling is to be held in place by 2.50mm galvanized mild steel wire at the top, middle and bottom of each wrap of chestnut paling. The wire is to be secured to the chestnut paling by fencing staples.

Ground Protection

The existing hard surfacing within the RPAs of retained trees T10 & T11, as depicted on the Tree Protection Plan (Arbtech TPP 01), provides passive protection against compaction to the underlying soil and, therefore, must be retained for the duration of the project. If this is removed, it shall be done so under direct supervision of the Project Arboriculturalist and replaced with suitable ground protection, capable of withstanding the likely loading for the site.

New temporary ground protection will be capable of supporting any traffic entering or using the site without being distorted or causing compaction of the underlying soil.

Where the Project Engineer determines that any hard surfacing is not adequate protection from any expected loading, ground boarding is to be installed to the engineer's specification on top of the hard surfacing within the root protection areas of retained trees.

Where machinery will be stored or used on the ground boarding within the RPAs of retained trees, an impervious barrier and/or bunding to prevent oils, fuel, or chemicals from leaching into the soil within or adjacent to the RPAs is to be installed.

Note: The ground protection might comprise one of the following:

- a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame to form a suspended walkway or on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;
- b) for pedestrian-operated plant up to a gross weight of 2t, proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150mm depth of woodchip), laid onto a geotextile membrane;
- c) for wheeled or tracked construction traffic exceeding 2t gross weight, an alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice to accommodate the likely loading to which it will be subjected.

For any situations other than those described in a) or b) (as above), the ground boarding is to be designed by a suitably qualified person to an engineering specification in conjunction with arboricultural advice to be suitable for supporting the expected loading to be placed upon it.

In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath so that tree root functions remain unimpaired.

At this stage, no contractors have been approached, so it is not possible to know exactly what equipment they have available and will be using.

Due to the various sizes of demolition and construction plant available and the potential requirements for material storage within the site, the final specifications for the ground boarding must be designed and supplied to the Project Arboriculturist for their approval by the Project Engineer a minimum of ten (10) working days before its installation.

Construction

Before the proposed development is constructed, a copy of the construction method statement will be submitted and approved by the Project Arboriculturist to ensure that it does not conflict with this Arboricultural Method Statement.

All excavations and construction work within or immediately adjacent to the RPAs or canopies of retained trees is to be undertaken under the direct supervision of the Project Arboriculturist.

Foundations Design

New foundations for buildings, structures, and hard surfacing situated within the RPAs of retained trees are to be designed in conjunction with arboricultural advice to accommodate the structure's likely loading. The foundations will be designed to limit the amount of excavation required within RPAs to retain significant roots, as identified during the site investigations.

The use of strip foundations within the RPAs of retained trees can cause extensive root loss and, as such, must be avoided.

The foundation design for the garden studio within the RPAs of retained trees T02, T05, T06, T07 & T08 is to be designed to minimise the adverse impact upon trees and should pay particular attention to the existing ground levels and proposed finished floor level. Foundation design will be undertaken using site-specific information in conjunction with the Project Arboriculturist and Engineer.

Root damage will be minimised using either:

- Screw piles
- Pads

Where piling is to be installed near trees, the smallest practical pile diameter will be used, as this reduces the possibility of striking major tree roots and the size of the rig required to sink the piles. If a piling mat is required, it will conform to the specification for ground boarding.

All and any excavations required for foundations within the RPAs of retained trees will initially be undertaken manually and under the direct supervision of the Project Arboriculturalist. See manual excavation.

Decking

The new decking is designed to connect the garden studio to the rest of the garden as well as provide an outside leisure space.

The decking framework and posts are to be designed so that the entire framework is situated entirely above the existing soil level, and individual posts may be movable to prevent damage to roots 25mm or greater in diameter.

All posts within the RPAs of retained trees T02, T04, T05, & T06, as indicated in the Tree Protection Plan (Arbtech TPP 01), will be excavated manually and under the direct supervision of the Project Arboriculturalist.

Concrete foundations

Before concrete is poured to form the foundations within or immediately adjacent to the RPAs of retained trees, the excavation is to be lined and sealed to prevent any leaching of the concrete into the soil and causing desiccation of retained roots by concrete runoff.

Manual excavation

Excavation within RPAs will be undertaken by hand under the direct supervision of the Project Arboriculturalist to the required depth of the foundations or to a minimum of 600mm deep of any excavation, whether for proposed foundations, hard surfacing, or underground services. The Project Arboriculturalist will determine the total depth of the manual excavation while on site.

The soil is to be loosened with a fork or pickaxe and then cleared with an air spade, air vac, or shovel. The Project Arboriculturalist will cleanly sever any roots found with either a hand saw or secateurs.

The Project Arboriculturalist shall cleanly sever any roots found with a diameter of less than 25mm. Roots of 25mm and above shall be excavated around without damaging them; the Project Arboriculturalist shall decide if it is feasible or necessary to retain the root; if not, it shall be severed.

The edge of the excavation closest to the trees will be covered with damp hessian to prevent soil collapse or contamination by concrete.

The soil beneath the depth may be sheet piled, regular piled, or excavated deeper. Machinery may be used for this, provided that it is situated outside of the RPAs of retained trees or has appropriate ground protection in place to move around and work upon.

Prohibition

- Mechanical digging or scraping is not permitted within a defined root protection area or areas cordoned off by protective barrier fencing.
- No access will be permitted within the protected areas;
- No materials, equipment or debris will be stored within any of the fenced areas or against the fencing;
- Fires are not permitted within 10m of any vegetation.
- Leaning objects against or attaching objects to a tree is not permitted.
- Machinery, plant, and vehicles are not permitted to be washed down within 10m of vegetation.
- Chemicals and materials are not to be transported, stored, used, or mixed within a root protection area or areas cordoned off by protective barrier fencing.
- Cement silos and mixing sites are to be situated within a bunded area to prevent spillage/leaking of chemicals harmful to trees. These areas are to be sited well clear of protected trees.
- Refuelling of plant or machinery is prohibited within 10m of the construction exclusion zones.
- An allowance must be made for sloping ground so that damaging materials such as concrete washings, mortar, or diesel oil cannot run towards trees.
- Where machinery is to be used within 5m of retained tree canopies, a banks man will be required at all times while setting up, moving, or operating within this distance of retained tree canopies.
- All caustic material and chemicals must be stored well clear of protected areas and preferably on lower ground if slopes are present or within a bonded area to prevent spills or leaks from entering the ground.

Site Management

The Site Manager will be responsible for briefing and inducting all personnel who will be working on any stage of this development, especially those who will be working within or adjacent to the canopies or RPAs of retained trees, and will make them aware of and provide a copy of this Arboricultural Method Statement (Arbtech AMS 01) and Tree Protection Plan (Arbtech TPP 01); this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing and or pouring of cement and concrete.

The Site Manager will be responsible for the day-to-day running and protection of all retained trees and for liaising with the Project Arboriculturalist about any tree-related matters and before any works that may or will affect the RPAs or canopies of retained trees; this is to include but not exclusively the movement and or operation of plant, excavations, unloading deliveries, mixing, pouring and storage of all caustic materials that may cause harm to retained trees.

The Site Manager will document any incidents of damage to retained trees or tree protection measures. Then, the Site Manager will report these incidents to the Project Arboriculturalist immediately and ensure that works within this area cease until the Project Arboriculturalist has had an opportunity to inspect the damage and, where appropriate, agree on a mitigation plan with the Local Planning Authority Tree Officer.

The Site Manager may designate another person to take charge of the briefing and inducting process of new site personnel or visitors in his absence.

If the Site Manager is replaced or is absent from the site for more than three consecutive working days, the Project Arboriculturalist will be informed, and a new pre-start meeting will be held with the new or acting Site Manager.

It is the responsibility of the Site Manager to ensure that the planning conditions attached to any granted planning consent are adhered to at all times and that a monitoring regime and supervision of any works within or adjacent to the RPAs are adopted.

If pruning works other than those previously approved are required at any time, permission must be sought from the Local Authority Tree Officer. Once permission is granted, they are to be carried out by a suitably qualified person in accordance with BS3998:2010 Tree work—Recommendations.

Services

Detailed drawings of proposed underground services are not available at this time; hence it is not possible to identify any specific potential impacts associated with the scheme at this stage.

Existing services within the site will be retained wherever possible. Where existing services within RPAs require upgrading, the utmost care must be taken to minimise disturbance. Where feasible, trenchless techniques are to be employed, and only where necessary should open excavations be considered.

Where new services are to be introduced into the site, they will be located outside of RPAs so that they do not interfere with tree roots. If any excavations are required within the RPAs, all trenches are to be excavated by hand radially to the tree trunks under the direct supervision of the Project Arboriculturalist and carried out under NJUG guidelines.

The final positions of any proposed services will be verified and approved by the Project Arboriculturalist and Local Authority Tree Officer before implementation.

New Underground services

Trenching for the installation of underground services and drainage routes could sever any roots that may be present and, as such, adversely affect the tree's health. For this reason, particular care will be taken in routing and installation methods of all underground services. All underground services and drainage routes will be located so that no excavations are required within RPAs.

Where underground services have been impossible to prevent from passing through RPAs or within proximity to trees, these sections are to be installed in one of three ways and under the direct supervision of the Project Arboriculturalist and in accordance with the National Joint Utilities Group guidelines (NJUG 4).

Trenchless Techniques

There are three main types of trenchless techniques: guided and unguided boring and pipe replacement by lining or bursting. These techniques allow for the installation, maintenance, or renewal of underground services without disturbing soil in which roots are likely to grow. Starting and receiving pits for the boring machinery are to be located outside of the RPAs of any retained trees, with the bore depth maintained at a minimum depth of 600mm below the existing ground level. Techniques involving external lubrication of the equipment shall use only water, as other lubricants (e.g., oil, bentonite, etc.) could contaminate the soil.

Broken Trench – Hand Dug

This technique combines both trenchless techniques and manual excavation, where excavation is unavoidable. Excavations will be limited to where there is clear access around and below the roots. All trenches shall be excavated by hand with the same precautions taken as for manual excavation. The open section of the trench will only be large enough to allow access for linking to the next section.

Manual Excavation

Excavation within RPAs will be undertaken by hand under the direct supervision of the Project Arboriculturalist to the required depth of the foundations or to a minimum of 600mm deep of any excavation, whether for proposed foundations, hard surfacing, or underground services. The Project Arboriculturalist will determine the total depth of the manual excavation while on site.

The soil is to be loosened with a fork or pickaxe and then cleared with an air spade, air vac, or shovel. The Project Arboriculturalist will cleanly sever any roots found with either a hand saw or secateurs.

The Project Arboriculturalist shall cleanly sever any roots found with a diameter of less than 25mm. Roots of 25mm and above shall be excavated around without damaging them; the Project Arboriculturalist shall decide if it is feasible or necessary to retain the root; if not, it shall be severed.

The edge of the excavation closest to the trees will be covered with damp hessian to prevent soil collapse or contamination by concrete.

The soil beneath the depth may be sheet piled, regular piled, or excavated deeper. Machinery may be used for this, provided that it is situated outside of the RPAs of retained trees or has appropriate ground protection in place to move around and work upon.

Landscaping

Landscaping, such as planting, turfing, fencing, etc., around retained trees may only be carried out once all tree protection measures have been removed.

All excavations within the RPAs of retained trees shall be undertaken by hand and without reducing current ground levels unless it is agreed in writing with the Local Planning Authority. At no time is the use of a rotavator permitted within the RPAs of retained trees.

Any tree roots discovered will be left in situ and shall not be cut or otherwise damaged. Where possible, the soil structure within the RPA shall be preserved.

No works will be carried out within the RPAs of any trees if the soil moisture is at a level where soil compaction may be likely. Should the soil become compacted or have a poor structure that would hinder the development of the existing trees and plants or any new plantings, the arboriculturalist will be consulted about soil decompaction techniques.

Monitoring and Supervision

Where trees have been identified within this Arboricultural Method Statement (Arbtech AMS 01) and Tree Protection Plan (Arbtech TPP 01) for retention, there will be an auditable system of arboricultural monitoring. This is to extend to arboricultural supervision whenever demolition or construction activity is to take place within or adjacent to any canopy or RPA.

The development's tree protection measures are to be monitored, and all demolition and construction works are to be undertaken within or adjacent to the RPAs of retained trees. The Project Arboriculturist will supervise the work and record and report observations to the Council at appropriate intervals.

Pre-commencement site meeting

Before the commencement of any works or machinery and materials arriving on site, a pre-commencement site meeting involving the Project Arboriculturalist, Landowner or Agent, Site Manager, contractors and Engineer (as appropriate) and the relevant Local Planning Authority Officers will be held to ensure that all aspects of the Arboricultural Method Statement and Tree Protection Plan are understood and for all parties to swap contact details. See Appendix 5: Contact Details.

Monitoring and supervision schedule

The initial monitoring visit will check that the tree protection measures are in the correct location and as specified within the approved Arboricultural Method Statement, and if so, to sign off on their installation.

Thereafter, monitoring visits are to take place at regular intervals to ensure that tree protection measures are in place and are functioning as designed or whenever necessary to undertake works to be carried out under arboricultural supervision. The frequency of the monitoring visits is to be agreed upon with the Local Authority Tree Officer at the pre-commencement site meeting.

A record of all arboricultural monitoring and supervision visits will be kept, and any faults will be logged; this will then be copied to the Site Agent, Developer, and Local Planning Authority in a digital format.

If areas must be redesigned during the development so that they would require changes to the approved Arboricultural Method Statement or Tree Protection Plan and so affect retained trees, the Project Arboriculturalist and Local Authority Tree Officer will be invited to attend a site meeting with all relevant parties. Before any changes are implemented, they must have been approved in writing by the Local Authority Tree Officer.

Supervision

The Project Arboriculturist will be required to attend the site to directly supervise all demolition and construction works that are to be undertaken within or adjacent to the RPAs of all retained trees and will be advised a minimum of 72 hours before the commencement of any works that require his attendance; these will include:

1. Pre-commencement site meeting.
2. Location of protective measures.
3. Supervised excavations for garden studio foundations within RPAs of tree nos. T02, T05, T06, T07 & T08.
4. Supervised excavations for decking posts within RPAs of tree nos. T02, T04, T05, & T06.
5. Any demolition and or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
6. Arboricultural sign off and removal of protective measures.

Completion meeting

Once all construction works have been completed and all materials and machinery have been removed from the site, the Project Arboriculturalist shall be informed and will invite the Local Authority Tree Officer to meet on-site to discuss the process, final remedial works that may be required and sign the development off so that the protective measures may be removed.

Arboricultural Monitoring & Supervision Sign-Off Checklist

18 Aberdare Gardens, London, NW6 3PY

Tree Number	Task	Date Completed	Signed (Arboriculturalist)	Signed (Site Manager)
All	Pre-commencement site meeting.			
All	Sign-off of the location and specification of the protective measures.			
T02, T05, T06, T07 & T08.	Manual excavation of garden studio foundations.			
T02, T04, T05, & T06	Manual excavation of decking foundations.			
All	Additional excavations (if required).			
All	Completion of groundworks.			
All	Completion of construction			
All	Removal of machinery and materials from site.			
All	Dismantle & remove protective measures.			
All	Completion of Landscaping.			

Tree Number	Task	Date Completed	Signed (Arboriculturalist)	Signed (Site Manager)
All	Sign-off from Project Arboriculturist			

Appendices

The following documents were released to the Client as appendices to this report:

- Appendix 1: Tree Schedule
- Appendix 2: Arboricultural Impact Assessment
- Appendix 3: Tree Protection Plan
- Appendix 4: Tree Protection Notice
- Appendix 5: Contact Details

If you require clarification of the information contained herein, please do not hesitate to contact us via 01244 661170.

Yours Sincerely,



Christopher Wren BSc (Hons) MArborA
Senior Arboricultural Consultant

07842313167

Christopherwren@arbtech.co.uk

A large, light gray, stylized graphic of a house roof with a chimney, spanning the width of the page and partially behind the text.

Appendix 1: Tree Schedule

BS5837:2012 Tree Survey

Arbtech Consulting Ltd

Client: Vasanth Padaki
 Project: 18 Aberdare Gardens, London, NW6 3PY
 Survey Date: 07/04/2025
 Surveyor: Anthony Jones



3 Well House Barns
 Chester Road
 Bretton
 Cheshire
 CH4 0DH
 Phone: 01244661170

Tree and Tag No Species		Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations		Cat ERC	
			No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment			
T01												Estimated Measurements		
Myrobalan Plum 'Nigra' <i>Prunus cerasifera</i> 'Nigra'		5.5	1	250	N	4	2.5	M	A: 28.3	Good	C: Good		B.1	
					E	1.5	2.5		R: 3		S: Not visible	Tree located off-site in neighbouring property. Asymmetrical crown due to neighbouring tree. Measurements estimated and indicative of largest individual tree in group.	20+ yrs	
					S	1	2.5				B: Not visible			
					W	3	2.5							
T02														
Monterey Cypress <i>Cupressus macrocarpa</i>		16	1	650	N	5	3	M	A: 191.2	Good	C: Good		B.1	
					E	4	2.5		R: 7.8		S: Good	Tree located onsite. Historic pruning consistent with crown lifting up to 3 m.	20+ yrs	
					S	3.5	2.5				B: Good			
					W	4	3							
T03													Estimated Measurements	
Common Lime <i>Tilia europaea</i>		18	1	550	N	5	4	M	A: 136.9	Good	C: Good		B.2	
					E	3	4		R: 6.6		S: Not visible	Tree located off-site in neighbouring property. Historic pruning consistent with pollarding at 14 m with 4 m regrowth.	20+ yrs	
					S	5.5	4				B: Not visible			
					W	6	4							
T04													Estimated Measurements	
Common Lime <i>Tilia europaea</i>		18	1	350	N	2	4	M	A: 55.4	Good	C: Good		B.2	
					E	4	4		R: 4.19		S: Not visible	Tree located off-site in neighbouring property. Historic pruning consistent with pollarding at 14 m with 4 m regrowth.	20+ yrs	
					S	5	3				B: Not visible			
					W	5	3							
Age Classifications:		N	Newly planted	EM	Early Mature		Condition:		C	Crown	Stems:		Ø	Diameter
		Y	Young	M	Mature				S	Stem			(Eq)	Equivalent stem diameter using BS5837:2012 definition
		SM	Semi-mature	OM	Over Mature				B	Basal area	ERC:		Estimated Remaining Contributio	


Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations			Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment			
T05													
Common Lime <i>Tilia europaea</i>	10	1	380	N E S W	1 1 3 1	5 5 4 5	M	A: 65.3 R: 4.55	Good	C: Fair S: Good B: Good	Tree located onsite at rear boundary. Historic pruning consistent with topping at 10 m.	B.2 20+ yrs	
T06													
Common Lime <i>Tilia europaea</i>	8	1	460	N E S W	2 1 2 2	5 5 4 5	M	A: 95.7 R: 5.51	Fair	C: Fair S: Poor B: Fair	Tree located onsite at rear boundary. 2 m longitudinal cavity on north aspect of main stem. Good occlusion wound wood growth developing around cavity. Historic pruning consistent with topping at 8 m.	C.2 10+ yrs	
T07													
Common Lime <i>Tilia europaea</i>	10	1	430	N E S W	2.5 3 3 2.5	4 2.5 3 3	M	A: 83.7 R: 5.16	Good	C: Fair S: Good B: Good	Tree located onsite on rear boundary within a 400 mm high retaining timber wall. Historic pruning consistent with topping at 10 m.	B.2 20+ yrs	
T08													
Common Lime <i>Tilia europaea</i>	14	1	440	N E S W	4 4 4.5 4.5	3 3 3 3	M	A: 87.6 R: 5.28	Good	C: Good S: Not visible B: Not visible	Tree located offsite in neighbouring property. 50 - 100 mm diameter deadwood in upper crown. Historic pruning consistent with crown lifting up to 3 m.	B.2 20+ yrs	
T09													
Cabbage Tree <i>Cordyline australis</i>	5	1	200	N E S W	1 1 1 1	4 4 4 4	EM	A: 18.1 R: 2.4	Good	C: Good S: Good B: Good	Palm tree located onsite. No notable features observed.	C.1 10+ yrs	
T10													
Common Horse Chestnut <i>Aesculus hippocastanum</i>	11	1	610	N E S W	6 6.5 5.5 5.5	3 3.5 6 3	M	A: 168.4 R: 7.32	Good	C: Good S: Good B: Good	Tree located onsite at front of property. Historic pruning consistent with crown reduction at 6 m with 5 m regrowth and crown lifting up to 6 m.	B.1 20+ yrs	
Age Classifications:	N Y SM	Newly planted Young Semi-mature	EM M OM	Early Mature Mature Over Mature	Condition:		C S B	Crown Stem Basal area	Stems: ERC:	Ø Diameter (Eq) Equivalent stem diameter using BS5837:2012 definition Estimated Remaining Contributio			

Tree and Tag No Species	Hght (m)	Stems		Crown		Age	RP A (m²) R (m)	Phys Condition	Structural Condition	Preliminary Recommendations		Cat ERC
		No	Ø (mm)	Spread (m)	Clear (m)					Survey Comment		
T11											Estimated Measurements	
Common Lime <i>Tilia europaea</i>	7	1	300	N	1	6	EM	A: 40.7 R: 3.59	Good	C: Fair S: Good B: Good	Tree located off-site in neighbouring property. Historic pruning consistent with Pollarding at 7 m.	B.2 20+ yrs
T12											Estimated Measurements	
Common Lime <i>Tilia europaea</i>	7	1	290	N	1	6	EM	A: 38.1 R: 3.48	Good	C: Fair S: Good B: Good	Tree located off-site in neighbouring property. Historic pruning consistent with Pollarding at 7 m.	B.2 20+ yrs
T13											Estimated Measurements	
Common Lime <i>Tilia europaea</i>	7	1	260	N	1	6	EM	A: 30.6 R: 3.12	Good	C: Fair S: Good B: Good	Tree located off-site in neighbouring property. Historic pruning consistent with Pollarding at 7 m.	B.2 20+ yrs



Appendix 2: Arboricultural Impact Assessment

ABERDARE GARDENS

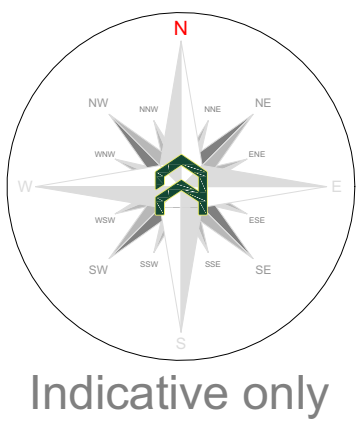

Arboricultural Impacts			
Impacts			Nos. of trees
Trees to be removed			0
Groups / Hedges to be removed (Partial removal of groups)			0 (2)
Trees with proposed incursions into RPAs			0
Groups / Hedges with proposed incursions into RPAs			0
Trees that will require pruning			0
Groups / Hedges that will require pruning			0
Trees to be transplanted			0
Groups / Hedges to be transplanted			0
No.	Species	Proposed structure	Incursion
T02	Monterey Cypress	Garden Studio	RPA
T02	Monterey Cypress	Decking	RPA
T04	Common Lime	Decking	RPA
T05	Common Lime	Garden Studio	RPA
T06	Common Lime	Decking	RPA
T06	Common Lime	Garden Studio	RPA
T06	Common Lime	Decking	RPA
T07	Common Lime	Garden Studio	RPA
T08	Common Lime	Garden Studio	RPA

Arboricultural Impacts - RPAs (Area)				
No.	Species	RPA	Incursion	
			(m ²)	(%)
T02	Monterey Cypress	191.1	12.9	6.7
T02	Monterey Cypress	191.1	Negligible	<1%
T04	Common Lime	55.4	Negligible	<1%
T05	Common Lime	65.3	1.4	2.1
T05	Common Lime	65.3	Negligible	<1%
T06	Common Lime	95.7	18.8	19.6
T06	Common Lime	95.7	Negligible	<1%
T07	Common Lime	83.6	15.3	18.3
T08	Common Lime	87.6	4.3	4.9

Tree Work Schedule			
No.	Species	Works	Category
T02	Monterey Cypress	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	B1
T04	Common Lime	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	B2
T05	Common Lime	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	C2
T06	Common Lime	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	B2
T07	Common Lime	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	B2
T08	Common Lime	Prune. Raise the crowns as required to give a minimum ground clearance of 4m (over the garden).	B2

All tree work is to be undertaken in accordance with British Standard BS 3968:2010 Tree work - Recommendations.

All existing trees to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

No. of individual trees to be removed			
U	A	B	C
0	0	0	0

No. of groups / hedges to be removed			
U	A	B	C
0 (R)	0 (R)	0 (R)	0 (R)

() Partial removal of a group

Arboricultural Method Statement

All tree work is to be undertaken in accordance with British Standard BS 3968:2010 Tree work - Recommendations.

Please refer to Arbrech Consulting Ltd. Tree Schedule, Arboricultural Method Statement and Tree Protection Plan for full details of all surveyed trees and how all aspects of the development may be implemented without detriment to retained trees.

Foundations within RPAs

The use of traditional strip foundations can result in excessive root loss and so should be avoided.

Designs for foundations that would minimize the adverse impact upon trees should include particular attention to the existing levels, proposed finished levels and cross sectional details. Site specific and specialist advice should be sought from the project engineers and arboriculturist.

Root damage can be minimised by using:

- Piles with site investigation used to be determined their optimal location whilst avoiding damage to roots important for the stability of the tree, by means of hand tools or compressed air soil displacement, to a minimum depth of 600mm.
- Beams, laid at or above ground level, and cantilevered as necessary to avoid tree roots identified by site investigation.

Where a slab for minor structures (e.g. shed base) is to be formed within the RPA, it should bear on the existing ground level, and should not exceed an area greater than 20% of the existing unsurfaced ground.

Slabs for larger structures (e.g. dwellings) should be constructed with a ventilated air space between the underside of the slab and the existing soil surface to enable gas exchange and venting through the soil surface. In such cases, a specialist irrigation system should be employed (e.g. roof run-off redirected under the slab). The design of the foundation should take into account of the effect on the load bearing properties of the underlying soil from the redirected run-off. Approval in principle for a foundation that relies on topsoil retention and roof run-off under the slab should be sought from building control authority prior to this approach being relied upon.

Where piling is to be installed near to trees, the smallest practical pile diameter should be used, as this reduces the possibility of striking major tree roots, and reduces the size of the rig required to sink the piles. If a piling rig is required, it should conform to the parameters for ground boring. Use of the smallest practical piling rig is also important where piling within the RPA is required, as this can reduce the need for access facilitation pruning. The pile type should be selected bearing in mind the need to protect the soil and adjacent roots from the potentially toxic effects of uncracked concrete, e.g. sleeved bored piles or screw piles.

This methodology is intended as a guide only and should not be used as a substitute for a full arboricultural assessment and consultation. Recommendations, based on a full arboricultural assessment, should be sought from the project engineers and arboriculturist.



Unit 3, Well House Barns, Chester, CH4 0DH
<https://arbtech.co.uk> 01244 661170

Project: 18 Aberdare Gardens London NW6 3PY

Client: Vasanth Padaki

Drawing: Arboricultural Impact Assessment

Based on: Proposed block plan

Drawing No: Arbtech AIA 01 Rev:

Date: April 2025 Scale: 1:100 @ A0 Drawn: CMW

Key:

Tree No.	T01	Tree Category	Trunk	Trunk
RPA		Category		Category
Existing Site (OS Map)		Proposed Site		Incursion - Structures

© Arbrech Consulting Ltd. 2025

Issue: Proposed decking situated within the RPAs retained trees as per 781/01 (Locorum &) but not shown in the supplied block plan.


Solution: Excavations of posts of the proposed decking within RPAs are to be undertaken manually under arboricultural supervision; posts may need to be relocated if roots greater than 25mm diameter will be affected.

Issue: Proposed garden studio situated within the RPA of trees T02, T05 to T08.

Solution: Foundations are to be designed to an engineering specification in conjunction with arboricultural advice so that it can be constructed entirely above ground level using micro screw piles or pads. There will be a void between the bottom of the structure and the top of the soil to allow for aqueous penetration and gaseous exchange.

Issue: Proposed shed situated within the RPAs of retained trees.


Solution: Shed to reuse existing concrete slab as foundations. If the existing slab is reused there will be no impact.





Appendix 3: Tree Protection Plan

ABERDARE GARDENS

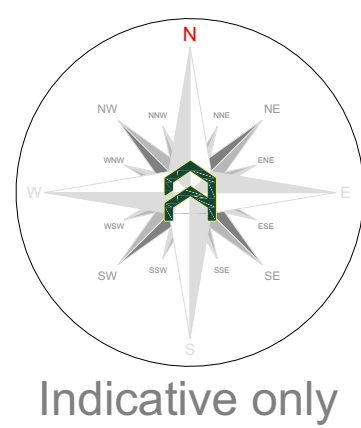

Tree Work Schedule			
No.	Species	Works	Category
T02	Mortuary Cypress	Prune. Raise the crown as required to give a minimum ground clearance of 4m over the garden.	B1
T04	Common Lime	Prune. Raise the crown as required to give a minimum ground clearance of 4m over the garden.	B2
T06	Common Lime	Prune. Raise the crown as required to give a minimum ground clearance of 4m over the garden.	C2
T07	Common Lime	Prune. Raise the crown as required to give a minimum ground clearance of 4m over the garden.	B2
T08	Common Lime	Prune. Raise the crown as required to give a minimum ground clearance of 4m over the garden.	B2

All tree work is to be undertaken in accordance with British Standard BS 5869:2010 Tree work - Recommendations.

All arising's are to be removed and the site is to be left as found.

Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber trolleys, tractors, excavators or cranes shall be parked or driven beneath the crown of any retained trees, to prevent subsequent compaction and root death.

Protective Fencing

To be erected prior to the commencement of all works on site, and retained in place throughout construction.

To comprise either 2.4m wooden site hoarding or 2m tall welded mesh panels or rubber or concrete feet. Panels are to be joined together using a minimum of two anti-lamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabiliser struts, which should be attached to a base plate and secured with ground pins.

All weather notices should be erected at regular intervals on the weld mesh panels with words such as "Tree Protection Area - Keep out".

Tree Protection Area

KEEP OUT

Do not move this fence

DOWN A COUNTRY PLANNING ACT 1990

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS

ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY

Trunk Protection

Protective trunk Wrapping:

To be attached to the trunks of retained trees prior to the commencement of all works on site, and retained in place throughout construction. To comprise of a minimum of three wrappings of clean dry hessian around the trunk from ground level up to 2.3m high and held in place using steel. Onto the hessian a minimum of three wires of chestnut casing and is to be held in place by 2.50mm mild steel galvanized wire in three locations and fixed into place using fencing staples fixed into the chestnut casing.

Protective hoarding:

To be erected prior to the commencement of all works on site, and retained in place throughout construction. To comprise of 2.4m wooden site hoarding constructed upon a timber frame work situated around the outside of the planting pit. Where the timber frame is constructed around the tree trunk a minimum of 4 layers of clean dry hessian is to be wrapped around the trunk to protect the bark.

All weather notices should be erected at regular intervals on the weld mesh panels with words such as "Tree Protection Area - Keep out".

Ground protection

Existing hard surface will be retained for the duration of the development to act as passive ground protection. If the hard surface is to be removed, it will be immediately replaced by the new surface or temporary ground protection until the new surface is to be installed.

New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

Note: The ground protection might comprise one of the following:

- for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;
- for pedestrian-operated plant up to a gross weight of 2t, proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;
- for wheeled or tracked construction traffic exceeding 2t gross weight, an alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.

For situations other than those described in a or b, the ground boarding is to be designed by a suitably qualified person to an engineering specification in conjunction with arboricultural advice, to be able to support the expected loading to be placed upon it.

In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath, so that tree root function remains unimpaired.

Foundations within RPAs

Screw piles and/or pads are to be installed under arboricultural supervision for the proposed garden studio foundations. The foundation will be designed to sit on top of the screw piles/pads with a ventilated void, to allow for gaseous exchange with the soil and a rain water run off system will be designed to provide irrigation to the void. This system will greatly reduce the impact of the dwelling on the RPA of the retained trees, leaving the screw pile diameter as the only impact.

Where piling is to be installed near to trees, the smallest practical pile diameter should be used, as this reduces the possibility of stirring major tree roots, and reduces the size of the rig required to sink the piles. If a piling mat is required, this should conform to the parameters for ground boarding. Use of the smallest practical piling rig is also important where piling within the branch spread is proposed, as this can reduce the need for access facilitation piling.

Decking within RPAs

All posts within the RPAs of retained trees, as indicated in the Tree Protection Plan (Attach TPP-01), will be excavated manually and under the direct supervision of the Project Arboriculturalist.

The decking framework and posts are to be designed so that the entire framework is situated entirely above the existing soil level, and individual posts may be movable to prevent damage to roots 25mm or greater in diameter.

Arboricultural Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:

- Pre-commencement site meeting.
- Location of protective measures.
- Supervised excavations for garden studio foundations within RPAs of tree nos. T02, T05, T06, T07 & T08.
- Supervised excavations for decking posts within RPAs of tree nos. T02, T04, T05 & T06.
- Any demolition and or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
- Arboricultural sign off and removal of protective measures.

Arboricultural Method Statement

Please refer to Arntech Consulting Ltd. Tree Schedule and Arboricultural Method Statement, for full details on all surveyed trees and how all aspects of the development might be implemented without detriment to retained trees.

Arbotech

Unit 3, Well House Barns, Chesser, CH4 0DH
http://arbotech.co.uk, 01244 681170

Project:

18 Aberdare Gardens
London
NW6 3PY

Client:

Vasanth Padaki

Drawing:

Tree Protection Plan

Based on:

Proposed block plan

Drawing No:

Arbotech TPP 01

Rev:

Date:

April 2025

Scale:

1:100 @ A0

Drawn:

CMW

Key:

Tree Nos.	T01	Tree Categories		Trunks	
RPAs		Category 'B' trees		Category 'C' trees	
Existing Site (OS Map)		Proposed Site		Protective Fencing	
Trunk protection		Ground protection		Arboricultural Excavations	

0m 1m 3m 5m 10m

© Arntech Consulting Ltd. 2025

Trunk protection

Ground protection:
The existing hard surface will be retained to act as ground protection within the RPAs of retained trees T10 & T11 for the duration of the development. If removed this will be done under direct arboricultural supervision and replaced with temporary ground boarding.

Ground protection:
Temporary ground boarding

Arboricultural supervision:
Manual excavation for the installation of garden studio and decking foundations within the RPAs of retained trees.

Trunk protection

Protective fencing

A large, light gray, stylized graphic of a house with a chimney, composed of several geometric shapes, serves as a background for the central section of the page.

Appendix 4: Tree Protection Notice

Tree Protection Area **KEEP OUT**

Do not move this fence

(TOWN & COUNTRY PLANNING ACT 1990)

**TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS
AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER.**

**CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL
PROSECUTION**

**ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN
PERMISSION OF THE LOCAL PLANNING AUTHORITY**




Unit 3, Well House Barn, Chester Road, Chester, CH4 0DH
<https://arbtech.co.uk> - 01244 661170



Appendix 5: Contact Details

Name	Position	Company	Contact
	Client		
	Agent / Project Manager		
	Tree Officer		
	Project Arboriculturist	Arbtech Consulting Ltd.	01244 661170 https://arbtech.co.uk
	Site Manager		
	Main contractor		

Document Production Record

Document number	Editor	Signature	Position	Issue number	Date
Arbtech AMS 01	Chris Wren		Senior Arboricultural Consultant	01	15/04/25

Report Limitations

Arbtech Consulting Ltd has prepared this report for the sole use of the above-named Client/Agent in accordance with our terms of business, under which our services were performed. No other warranty, expressed or implied, is made as to the professional advice included in this report or any other services provided by us. This report may not be relied upon by any other party without the prior and express written agreement of Arbtech Consulting Ltd. The assessments made assume that the sites and facilities will continue to be used for their current purpose without significant change. The conclusions and recommendations contained in this report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from third parties has not been independently verified by Arbtech Consulting Ltd.

Copyright

© This Report is the copyright of Arbtech Consulting Ltd. Any unauthorised reproduction or usage by any person other than the addressee is strictly prohibited.