

NOTES

NOTE 1.
THE LOCATIONS AND TYPE OF TREE PROTECTIVE FENCING SHALL BE CONFIRMED ON SITE WITH THE SUPERVISING ARBORICULTURIST.

NOTE 2.
ALL RPAS OF RETAINED TREES AND GROUPS OF TREES SHALL BE PROTECTED BY TEMPORARY GROUND PROTECTION WHERE PLANT HAS TO PASS OVER THESE AREAS TO PROVIDED CONSTRUCTION ACCESS. WHERE INSTRUCTED ON SITE BY THE SUPERVISING ARBORICULTURIST TEMPORARY GROUND PROTECTION CAN BE LAID OVER THE TOP OF COPPICED TREES AND SHRUBS.


NOTE 3.
THE NO-DIG CONSTRUCTION CROSS SECTION FOR PATHWAYS IS PROVIDED ON DRAWING NUMBER 5117039-ATK-ZZ-ZZ-DR-L-7500 P1. IT IS TO BE NOTED THAT THE AREAS OF NO-DIG CONSTRUCTION FOR ACCESS ROUTES RELATE SOLELY TO AREAS WHERE THE ROUTES TRAVERSE OVER RPAS OF RETAINED TREES. OUTSIDE OF THESE AREAS THE CONTRACTOR CAN FOLLOW THE STANDARD SPECIFICATION FOR THE ACCESS ROADS.

NOTE 4.
WHERE TREES ARE TO BE RETAINED WITHIN SPILLWAYS THE INSTALLATION OF THE REINFORCED TURF SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.

NOTE 5.
WHERE THE PONDS ARE TO RECEIVE PRE-GROWN TURF ON SPILLWAYS AROUND TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.

NOTE 6.
WHERE THE REINFORCED EARTH BUNDS ARE TO BE INSTALLED IN THE RPAS OF RETAINED TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS.

NOTE 7.
FOR TREE WORKS SCHEDULE SEE ARBORICULTURAL METHOD STATEMENT

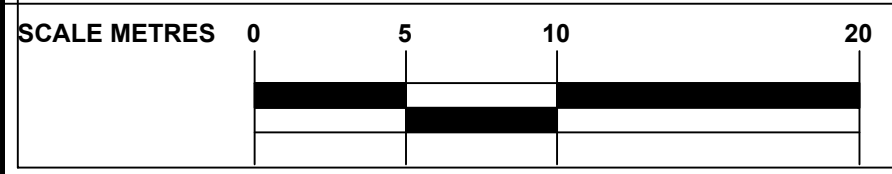

000

*CATEGORY A TREE
+ TREE REF.

000

*CATEGORY B TREE
+ TREE REF.

000

*CATEGORY C TREE
+ TREE REF.

000

*CATEGORY U TREE
+ TREE REF.

G1

*category according to BS5837

TREE GROUP REFERENCE

W1

WOODLAND GROUP + GROUP REFERENCE

HATCH EXTENT INDICATE APPROX
EDGE OF CANOPIES OF PERIMETER TREES (COLOUR
OF BOUNDARY LINE RELATES TO TREE *CATEGORIES
AS FOR INDIVIDUAL TREES AS SHOWN ABOVE)

PLEASE REFER TO THE ARBORICULTURAL METHOD
STATEMENT FOR CONFIRMATION OF ARBORICULTURAL
METHODS OF WORKING

ROOT PROTECTION AREA
TO FOLLOW

WOODLAND GROUP TO BE
REMOVED OR COPPICED

PROPOSED SCHEME

TREE TO BE REMOVED
OR COPPICED

NO DIG CONSTRUCTION

ARBORICULTURAL SUPERVISION
AND METHODOLOGY

PROTECTIVE BARRIER

Stat	Purpose of Issue	Date	Auth	Rev	Description	By	Date	Chk'd	Auth
A	FOR CONSTRUCTION	25/01/15	TD	C1	FOR CONSTRUCTION	JK	25/01/15	BJ	TD
S3	FOR COSTING	31/10/14	TD	P6	FOR COSTING, TREE SCHEDULE REMOVED	IF	31/10/14	TD	TD
S3	FOR COSTING	10/10/14	TD	P5	FOR COSTING	IF	10/10/14	TD	TD
S2	FOR PLANNING	02/07/14	TD	P4	FOR PLANNING	IF	02/07/14	TD	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	04/06/14	TD	P3	UPDATED SCHEDULE	MS	04/06/14	LB	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	22/05/14	TD	P2	HATCHES FROZEN IMPROVED VISIBILITY	MS	22/05/14	JH	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	15/05/14	TD	P1	'WORK IN PROGRESS' ISSUE TO PPSG	NP	14/05/14	JH	TD

ATKINS™

Atkins Limited

Landscape Architecture,
The Octagon,
27 Middleborough,
Colchester, Essex, England

Tel: (01206) 732000
Fax: (01206) 732020
www.atkinsglobal.com

Client

City of London Corporation

Project

HAMPSTEAD HEATH PONDS PROJECT

Sheet Size

Original Scale

Designed/Drawn

Checked

Authorised

A1

1:250 @ A1
1:500 @ A3

NP

JH

TD

Status

Drawing Number

Rev

S2

5117039-ATK-P2-ZZ-DR-Y-2000

C1

P:\GBEMC\Water\Project\AK0098 Dams\5117039 Hampstead Heath Flood and WQ Management\60 - Documentation\63 - Drawings Generated\05-In5117039 COL LA001-LA017 (Arb survey) C1.dwg