

- NOTES
- NOTE 1.

THE LOCATIONS AND TYPE OF TREE PROTECTIVE FENCING SHALL BE CONFIRMED ON SITE WITH THE SUPERVISING ARBORICULTURIST.
- NOTE 2.

ALL RPAS OF RETAINED TREES AND GROUPS OF TREES SHALL BE PROTECTED BY TEMPORARY GROUND PROTECTION WHERE PLANT HAS TO PASS OVER THESE AREAS TO PROVIDED CONSTRUCTION ACCESS. WHERE INSTRUCTED ON SITE BY THE SUPERVISING ARBORICULTURIST TEMPORARY GROUND PROTECTION CAN BE LAID OVER THE TOP OF COPPICED TREES AND SHRUBS.
- NOTE 3.


THE NO-DIG CONSTRUCTION CROSS SECTION FOR PATHWAYS IS PROVIDED ON DRAWING NUMBER 5117039-ATK-ZZ-ZZ-DR-L-7500 P1. IT IS TO BE NOTED THAT THE AREAS OF NO-DIG CONSTRUCTION FOR ACCESS ROUTES RELATE SOLELY TO AREAS WHERE THE ROUTES TRAVERSE OVER RPAS OF RETAINED TREES. OUTSIDE OF THESE AREAS THE CONTRACTOR CAN FOLLOW THE STANDARD SPECIFICATION FOR THE ACCESS ROADS.
- NOTE 4.

WHERE TREES ARE TO BE RETAINED WITHIN SPILLWAYS THE INSTALLATION OF THE REINFORCED TURF SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.
- NOTE 5.

WHERE THE PONDS ARE TO RECEIVE PRE-GROWN TURF ON SPILLWAYS AROUND TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.
- NOTE 6.

WHERE THE REINFORCED EARTH BUNDS ARE TO BE INSTALLED IN THE RPAS OF RETAINED TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS.
- NOTE 7.

FOR TREE WORKS SCHEDULE SEE ARBORICULTURAL METHOD STATEMENT

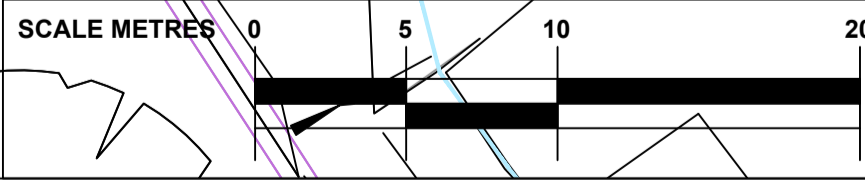

TREE CONSTRAINTS KEY

000

*CATEGORY A TREE
+ TREE REF.

000

*CATEGORY B TREE
+ TREE REF.

000

*CATEGORY C TREE
+ TREE REF.

000

*CATEGORY U TREE
+ TREE REF.

G1

TREE GROUP REFERENCE

W1

WOODLAND GROUP + GROUP REFERENCE.
HATCH EXTENT INDICATE APPROX
EDGE OF CANOPIES OF PERIMETER TREES (COLOUR
OF BOUNDARY LINE RELATES TO TREE *CATEGORIES
AS FOR INDIVIDUAL TREES AS SHOWN ABOVE)

PLEASE REFER TO THE ARBORICULTURAL METHOD
STATEMENT FOR CONFIRMATION OF ARBORICULTURAL
METHODS OF WORKING

ROOT PROTECTION AREA
TO FOLLOW

WOODLAND GROUP TO BE
REMOVED OR COPPICED

PROPOSED SCHEME

TREE TO BE REMOVED
OR COPPICED

NO DIG CONSTRUCTION

ARBORICULTURAL SUPERVISION
AND METHODOLOGY

PROTECTIVE BARRIER

Stat	Purpose of Issue	Date	Auth	Rev	Description	By	Date	Chk'd	Auth
A	FOR CONSTRUCTION	25/01/15	TD	C1	FOR CONSTRUCTION	JK	25/01/15	BJ	TD
S3	FOR COSTING	31/10/14	TD	P7	FOR COSTING, TREE SCHEDULE REMOVED	IF	31/10/14	TD	TD
S3	FOR COSTING	10/10/14	TD	P6	FOR COSTING	IF	10/10/14	TD	TD
S3	FOR REVIEW	12/09/14	TD	P4	FOR REVIEW	IF	12/09/14	TD	TD
S2	FOR PLANNING	02/07/14	TD	P3	FOR PLANNING	IF	02/07/14	TD	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	22/05/14	TD	P2	HATCHES FROZEN IMPROVED LEGIBILITY	MS	22/05/14	JH	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	14/05/14	TD	P1	'WORK IN PROGRESS' ISSUE TO PPSG	NP	14/05/14	JH	TD

ATKINS™

Atkins Limited

Landscape Architecture,
The Octagon,
27 Middleborough,
Colchester, Essex, England
CO1 1TG

Tel: (01206) 732000
Fax: (01206) 732020
www.atkinsglobal.com

Client

City of London Corporation

Project

HAMPSTEAD HEATH PONDS PROJECT

Title

MENS' BATHING POND
TREE PROTECTION PLANS

Sheet Size

A1

Original Scale

1:250 @ A1
1:500 @ A3

Designed/Drawn

NP

Checked

JH

Authorised

TD

Status

S3

Drawing Number

5117039-ATK-P6-ZZ-DR-Y-2000

Rev

C1

P:\GBEMC\Water\Project\AK0098 Dams\5117039 Hampstead Heath Flood and WQ Management\60 - Documentation\63 - Drawings Generated\05-In5117039 COL LA001-LA017 (Arb survey) C1.dwg