


- NOTES**
- NOTE 1.
THE LOCATIONS AND TYPE OF TREE PROTECTIVE FENCING SHALL BE CONFIRMED ON SITE WITH THE SUPERVISING ARBORICULTURIST.
- NOTE 2.
ALL RPAS OF RETAINED TREES AND GROUPS OF TREES SHALL BE PROTECTED BY TEMPORARY GROUND PROTECTION WHERE PLANT HAS TO PASS OVER THESE AREAS TO PROVIDED CONSTRUCTION ACCESS. WHERE INSTRUCTED ON SITE BY THE SUPERVISING ARBORICULTURIST TEMPORARY GROUND PROTECTION CAN BE LAID OVER THE TOP OF COPICED TREES AND SHRUBS.
- NOTE 3.
THE NO-DIG CONSTRUCTION CROSS SECTION FOR PATHWAYS IS PROVIDED ON DRAWING NUMBER 5117039-ATK-ZZ-ZZ-DR-L-7500 P1. IT IS TO BE NOTED THAT THE AREAS OF NO-DIG CONSTRUCTION FOR ACCESS ROUTES RELATE SOLELY TO AREAS WHERE THE ROUTES TRAVERSE OVER RPAS OF RETAINED TREES. OUTSIDE OF THESE AREAS THE CONTRACTOR CAN FOLLOW THE STANDARD SPECIFICATION FOR THE ACCESS ROADS.
- NOTE 4.
WHERE TREES ARE TO BE RETAINED WITHIN SPILLWAYS THE INSTALLATION OF THE REINFORCED TURF SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.
- NOTE 5.
WHERE THE PONDS ARE TO RECEIVE PRE-GROWN TURF ON SPILLWAYS AROUND TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS WHERE THE WORKS ARE UNDERTAKEN WITHIN THE RPAS OF RETAINED TREES.
- NOTE 6.
WHERE THE REINFORCED EARTH BUNDS ARE TO BE INSTALLED IN THE RPAS OF RETAINED TREES THE WORKS SHALL BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION WITHIN THE AMS.
- NOTE 7.
FOR TREE WORKS SCHEDULE SEE ARBORICULTURAL METHOD STATEMENT

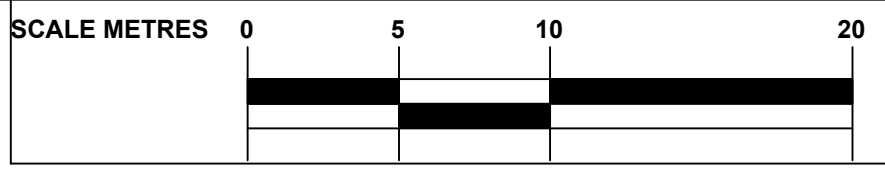

TREE CONSTRAINTS KEY		*category according to BS5837	
000	*CATEGORY A TREE + TREE REF.	G1	TREE GROUP REFERENCE
000	*CATEGORY B TREE + TREE REF.	W1	WOODLAND GROUP + GROUP REFERENCE
000	*CATEGORY C TREE + TREE REF.		HATCH EXTENT INDICATE APPROX EDGE OF CANOPIES OF PERIMETER TREES (COLOUR OF BOUNDARY LINE RELATES TO TREE *CATEGORIES AS FOR INDIVIDUAL TREES AS SHOWN ABOVE)
000	*CATEGORY U TREE + TREE REF.		PLEASE REFER TO THE ARBORICULTURAL METHOD STATEMENT FOR CONFIRMATION OF ARBORICULTURAL METHODS OF WORKING
			ROOT PROTECTION AREA TO FOLLOW
			WOODLAND GROUP TO BE REMOVED OR COPICED
			PROPOSED SCHEME
			TREE TO BE REMOVED OR COPICED
			NO DIG CONSTRUCTION
			ARBORICULTURAL SUPERVISION AND METHODOLOGY
			PROTECTIVE BARRIER

Stat	Purpose of Issue	Date	Auth	Rev	Description	By	Date	Chk'd	Auth
A	FOR CONSTRUCTION	25/01/15	TD	C1	FOR CONSTRUCTION	JK	25/01/15	BJ	TD
S3	FOR COSTING	31/10/14	TD	P7	FOR COSTING, TREE SCHEDULE REMOVED	IF	31/10/14	TD	TD
S3	FOR COSTING	10/10/14	TD	P6	FOR COSTING	IF	10/10/14	TD	TD
S2	FOR PLANNING	02/07/14	TD	P4	FOR PLANNING	IF	02/07/14	TD	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	04/06/14	TD	P3	UPDATED SCHEDULE	MS	04/06/14	LB	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	22/05/14	TD	P2	HATCHES FROZEN IMPROVED LEGIBILITY	MS	22/05/14	JH	TD
S0	'WORK IN PROGRESS' ISSUE TO PPSG	14/05/14	TD	P1	'WORK IN PROGRESS' ISSUE TO PPSG	NP	14/05/14	JH	TD

ATKINS
Atkins Limited
Landscape Architecture,
The Octagon,
27 Middleborough,
Colchester, Essex, England
Tel: (01206) 732000
Fax: (01206) 732020
www.atkinsglobal.com

Client
City of London Corporation
Project
HAMPSTEAD HEATH PONDS PROJECT
©

Client		Title	
City of London Corporation		HIGHGATE NO. 1 POND TREE PROTECTION PLANS	
Sheet Size	Original Scale	Designed/Drawn	Checked
A1	1:250 @ A1 1:500 @ A3	NP	JH
Status	Drawing Number	Date	Authorised
S2	5117039-ATK-P6-ZZ-DR-Y-2001	07.05.14	TD
			Rev
			C1