

Existing Ground FI level 49.66 OD
 Assume soffit of existing foundations 48/97 OD
 Top of basement structural slab level 45.67 OD
 Bottom of underpins 45.17 OD


EXISTING BASEMENT IN THIS LOCATION
 Existing basement level 47.66 OD
 Assume soffit of existing foundations 46/97 OD
 Top of basement structural slab level 45.67 OD
 Bottom of underpins 45.17 OD

Existing Ground FI level 49.66 OD
 Assume soffit of existing foundations 48/97 OD
 Top of basement structural slab level 45.67 OD
 Bottom of underpins 45.17 OD

Existing Ground FI level 49.66 OD
 Assume soffit of existing foundations 48/97 OD
 Top of basement structural slab level 45.67 OD
 Bottom of underpins 45.17 OD

EXISTING BASEMENT IN THIS LOCATION
 Existing basement level 47.66 OD
 Assume soffit of existing foundations 46/97 OD
 Top of basement structural slab level 45.67 OD
 Bottom of underpins 45.17 OD

- Stage 5**
 Remove existing Ground floor and install props
 In non-consecutive bays of 1m max length (to be agreed with Engineer) Excavate and construct RC base, then construct RC wall . Repeat until all pins are cast.
 Cast Basement Slab
 Install precast floor and Cast structural topping
- Stage 6**
 Form transition pins in non-consecutive bays of 1m max length (to be agreed with Engineer)

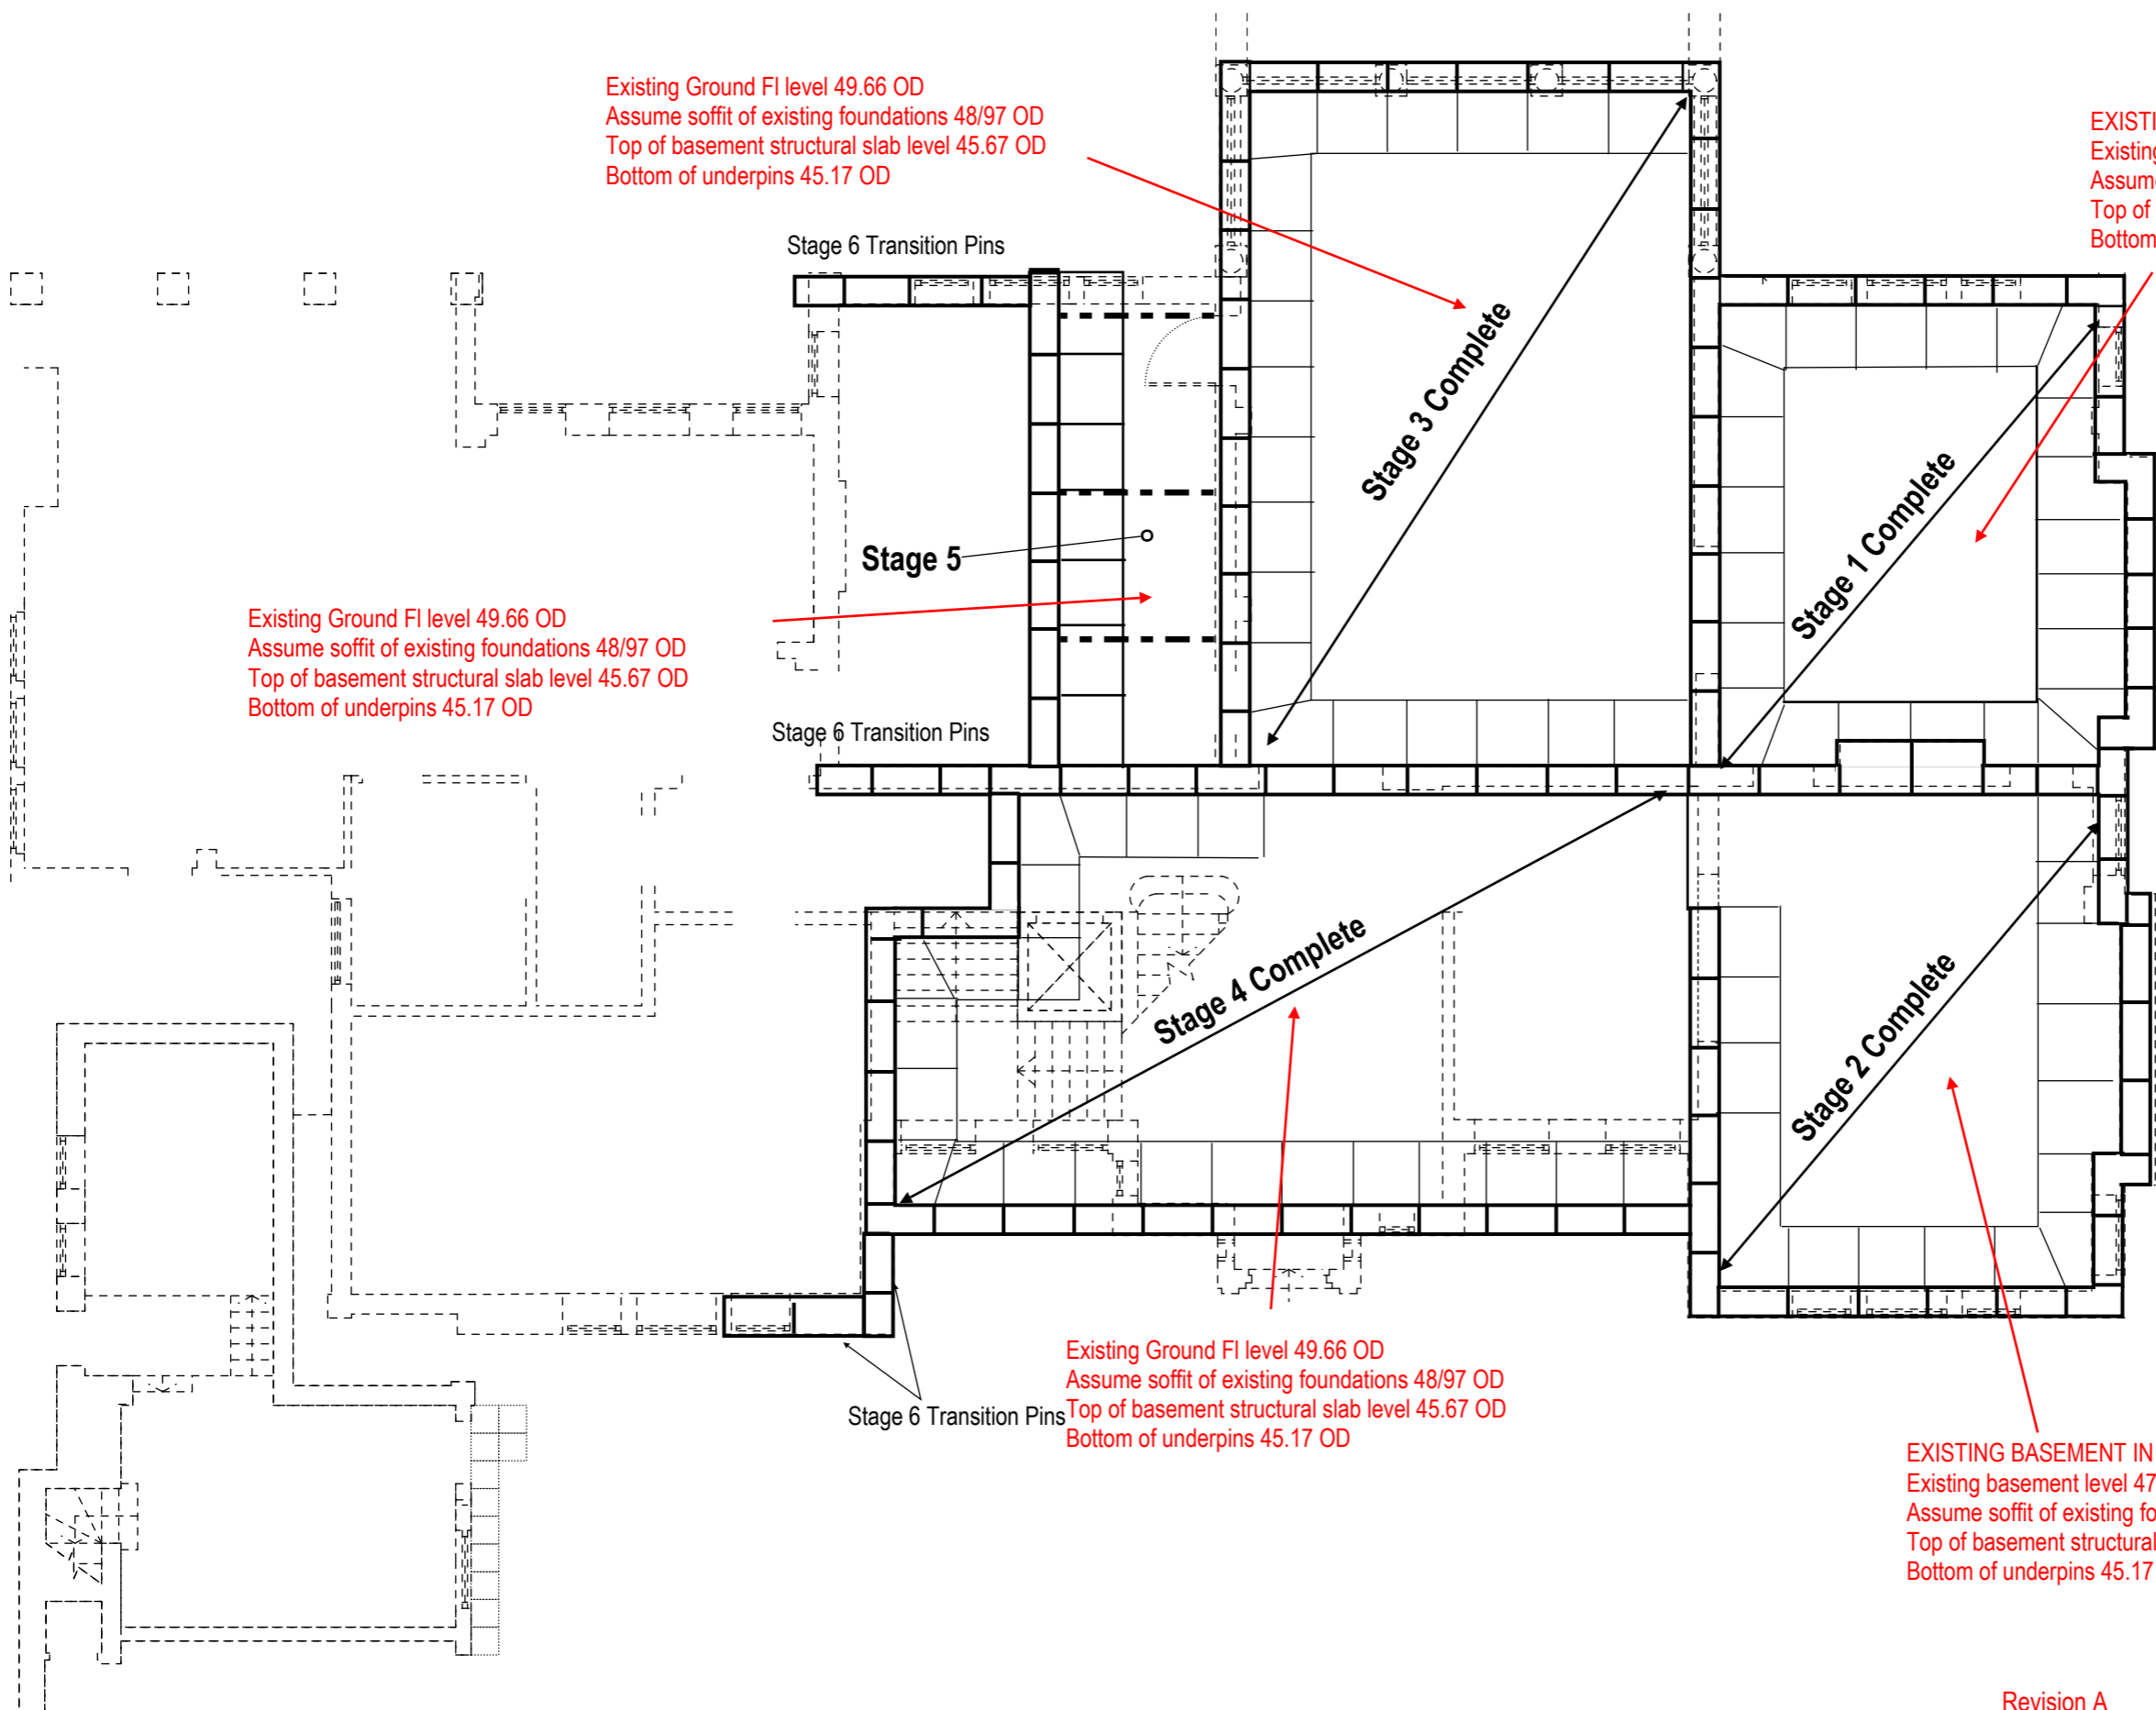

Revision A 03/2015 Notes added in RED

<p><i>Ellis and Moore</i> <i>Consulting Engineers</i></p> <p>9th Floor, Hill House, 17 Highgate Hill, London N19 5NA Tel: 020 7281 4821 Fax: 020 7263 6613</p>	Project 14 Templewood Ave NW3	Date Feb 2015
	Title Proposed Basement Construction Sequence	Scale Apprx 1:100
	Sheet 5 of 6	Drawing No. pending / 05A