

1-38-3644

# REPORT

on the impact on trees

of proposals for development

at

4 Wedderburn Road, London, NW3 5QE

(22<sup>nd</sup> May 2015)



**JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED**

•  
The Old School  
Titely  
HR5 3RN  
*at Jericho, Oxford  
& Harpenden, Herts.*

TEL 01582 80 80 20  
FAX 01544 231 006  
MOB 07860 453 072

•  
[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)



Registered Consultant of the Arboricultural Association  
John Cromar, Dip. Arb. (RFS), F.Arbor A.



Company Registration No. 5195523. Registered in England and Wales.  
Registered Office: 2 Water End Barns, Water End, Eversholt, Beds., MK17 9EA

## 01

### Introduction and Instructions

I am instructed by Stiff + Trevillion Architects LLP on behalf of clients to make an assessment of tree amenity value and condition of trees, at 4 Wedderburn Road, London, NW3 5QE, and of the impact of a proposal for development (a basement extension) on such trees. Accordingly, a site inspection was carried out on 25<sup>th</sup> November, 2014.

## 02

### Copyright

#### 02.01

Copyright is retained by the writer. This is a report for the sole use of the client(s) named above. It may be copied and used by the client in connection with the above instruction only. Its reproduction or use in whole or in part by anyone else without the written consent of the writer is expressly forbidden. The appended schedule of tree work, and the plan, may, without the written consent of the writer, be reproduced to contractors for the sole purpose of tendering.

## 03

### Notes

#### 03.01

##### PLANS

1-38-3644/P1 gives an approximate representation (in plan) of actual crown form, and is intended to indicate the relationship of neighbouring trees to each other, and should be read with the comments on crown shape and tree value in TREE DETAILS appended. The plan gives a quick reference assessment of value as per section 4, table 1, of BS 5837:2012 'Trees in relation to design, demolition and construction - Recommendations'. Assessment of value in the TREE DETAILS table appended is, in accordance with British Standard 5837:2012 related mainly but not exclusively to the criterion of *visual value to the general public*. The Standard recommends a way of classifying trees when assessing their potential value in relation to proposed development. Some surveys may not include any trees of one or more categories. Table 1 suggests categories 'U', 'C', 'B' and 'A', in ascending merit. 'U' (RED crown outline on plan) category trees are dangerous \ low value trees that could require removal for safety or arboricultural reasons. 'C' (GREY or black/uncoloured crown outline on plan) category trees are of no particular merit, but in adequate condition for retention. 'A' category trees (GREEN crown outline on plan) are trees of high vitality or good form, or of particular visual importance: 'B' (BLUE crown outline on plan) category are good trees but may be of slightly poorer form or be not sited as importantly as 'A' category trees. See TREE DETAILS appended. Category Assessment appears in column 10. This standard also provides a way of determining an area (see TREE DETAILS column 7) – the RPA – root protection area - around the trunk of the tree in which protective measures should be used in order to prevent significant damage to trees. There are

various ways of achieving this. A simple way is to use exclusion fencing, but other methods have been shown by established use to be very effective.

### 03.02

1-38-3644/P2 and 1-38-3644/P3A are colour-coded to indicate where arboricentric methods are proposed during the demolition and construction processes.

## 04

### Sources and Documents

Ground level inspection.

Supplied plans refs:

EA London Survey Company – S+T119-14 – 03 – Existing Site Plan.

Stiff + Trevillion drawings – 3786 P108 – Proposed Basement & Ground Site Plans.

## 05

### Appraisal

### 05.01

#### AMENITY / SCREENING BY TREES AND SHRUBS

Tree 1 a tree under local authority control on Wedderburn Road is of some general public amenity value. The remaining trees and shrubs are situated to the rear of no. 4, and are of only strictly local amenity value to owners / users of the site, and to some extent to those of adjoining properties.



A large *Eucalyptus* (tree 2) of poor form stands in the rear garden. See photos overleaf.



**05.02**  
**TREES AND LAYOUT - POTENTIAL FOR CONFLICT WITH ROOTS**  
(Details appear in the tree detail table appended.) The figures in columns 6 and 7 in the tree details table appended indicate the root protection area ('RPA'), and typically the basic exclusion fence position. New materials and methods have been developed and continue to be developed that assist in promoting the successful retention of trees in association with constructed features. It should be noted that BS 5837:2012 (section 7.4.2) supports 'up and over' methods of construction where appropriate. The design principle of this method is outlined within Arboricultural Practice Note 12 (Through the Trees to Development, - a revision of APN 1, 1996, published by AAIS / Tree Advice Trust). This

method has been used for many years on the recommendation of John Cromar's Arboricultural Co. Ltd. and has successfully allowed the retention of mature trees very close to construction activities.

### 05.03

An assessment as per BS5837:2012 section 4.6.2 has been carried out in connection with all trees to be retained. This section requires that site conditions, tree mechanics, etc., are taken into account in determining the likely position of roots. IN this case it is considered unlikely that any marked root development has taken place in the upper level front garden area. The front garden wall is a substantial retaining wall and as such is likely founded deeply. The RPA of tree one, in accordance with commonly observed patterns in greater London is probably strongly ellipsoid with lobes, as indicated, and mainly in the footway and driveway areas. Robust methods are proposed below to protect this root system.

### 05.04

#### ROOTS and DESIGN

SRP is an acronym for *static root plate*, (after *Mattheck*, 1991, etc.) a radial dimension derived from trunk diameter based on studies of wind-thrown trees and thus a guide to where structurally significant roots are likely to be located. RPA is an acronym used in BS5837:2012 and signifying the *root protection area*. The RPA is a guide to where systemically significant roots are likely to be located. No significant encroachment is assessed to apply in this case.

### 05.05

It can also usefully be noted that the tree in question has been reduced, probably repeatedly. This treatment must now be maintained indefinitely for safety reasons unconnected with development. Repeated reduction tends to reduce the inputs required from roots for any tree. In the writer's now extensive experience gained over more than a third of a century in arboriculture, controlled, limited-extent, vertical root cutting has been observed to be of little or no significance to tree health. The actually damaging operations are those that degrade, compact or rut the ground surface within the RPA, for example by uncontrolled access by mechanical excavators, dumpers, etc.

### 05.06

If any limited root cutting proves in the course of implementation of arboricentric methods below (e.g. Method 7) to be entailed in this proposal, it is likely to be of extremely limited extent and by an order of magnitude, far less than that entailed in the commercial moving of maturing and even mature trees, which has been practised successfully for centuries. In view of the above I conclude that no special footings are needed from the arboricultural perspective. In this case all trees to be retained can be adequately protected by exclusion fencing and other measures as indicated. Methods are proposed below to reduce and ameliorate impacts on root systems of retained trees.

### 05.07

#### PERCEPTION OF TREES

The majority of the significant trees are located mainly to the N and SE of the proposed extended dwelling, which is in a closely similar position to the existing structure : the existing structure's position in relation to the existing trees has

not generated any obvious or reported requirement to prune trees inappropriately. In addition, the proposed basement will be partly artificially lit and partly via a lightwell. Trees in XG5 lie outside the curtilage, in a garden approximately 2m above the level of that of the site, and therefore can reasonably be viewed as secure from proposals to fell or reduce. Proposed replacement trees are sited generally to the N of habited parts of the proposed structures. In view of the above I conclude that shading by trees has been considered (as section 5.6.2.6 of BS 5837:2012 recommends) and appears not significant.

#### **05.08**

Processing by the LPA of any due application from future owners for permission to carry out tree work will no doubt be carried out with due regard for good arboricultural practice and according to British Standard 3998:2010 'Tree Work – Recommendations'. In any appeal that might arise against refusal of LPA consent to reduce inappropriately, or fell trees, common arboricultural criteria to those of the LPA would be used by any specialist tree inspectors of the Planning Inspectorate, and thus the trees would in my view be thus protected against inappropriate work. I consider that any such notional issues are very likely to be dealt with appropriately as no doubt in the past they have been within the Borough, as such tree/building juxtapositions are far from rare.

#### **05.09**

##### **SUPERSTRUCTURE AND TREE APPRAISAL - TREE PRUNING**

I note from the drawings supplied that some very minor encroachment on the crowns of retained tree 1 may occur. The form of the tree where it overhangs the site is such that the defining branch structure is well above or clear of the proposed construction zone.

#### **05.10**

##### **TREE REMOVAL APPRAISAL and REPLACEMENT PLANTING**

Please see section 08 for comments on the individual trees proposed for removal. A group of 6 small trees in total are proposed for removal. The majority of these are young trees, which can easily be replaced with more suitable planting, which I note the LPA has indicated can be dealt with by Condition. One tree is decayed and requires removal for safety reasons. Appropriate replacement tree planting will play a moderately important role in providing for future strictly local amenity. The British Geological Survey information for the area indicates that the underlying sub-soils is the Claygate beds, silt and fine-grained sand, etc. This places no significant constraint on species selection for tree and other planting, and tends to be an excellent parent material / planting medium.

#### **05.11**

##### **SUPERVISION**

Supervision by an arboriculturist is a desirable element of site development where trees are present and to be retained. Good communication between site agent and arboriculturist can reduce the need for such a measure throughout a project, but it is essential at the critical point of first site possession by the first contractor – often the demolition contractor. I propose that this takes place at key points in the construction process, and additionally whenever required by

the architect or LPA. These key stages are as per method 1 in section 06.02 below.

#### **05.12**

##### **PUBLISHED GUIDANCE IN RELATION TO TREES AND DEVELOPMENT**

In conserving trees on development sites, expected best practice is as in B.S. 5837 : 2012. Section 5.1.1 notes :

**“Certain trees are of such importance and sensitivity as to be major constraints on development or to justify its substantial modification : attempts to retain too many or unsuitable trees on a site can result in excessive pressure on the trees during demolition or construction work, or post-completion demands for their removal.”**

#### **05.13**

The above advice appears to have been considered in formulating proposals for development.

#### **05.14**

##### **CONCLUSION**

**I conclude that the construction proposed, subject to precautionary measures as outlined above and as per the recommendations outlined below, will not be injurious to trees to be retained, nor will require any trees of both significant public amenity value and with safe useful expectancy to be removed.**

### **06**

#### **Tree Protection Proposals**

#### **06.01**

##### **TREE PROTECTION - GENERAL**

It is highly important to tree health and vitality that construction activities are carried out strictly in accordance with the tree protection methods specified. A single traverse of a root protection area by a mechanical excavator can cause **SIGNIFICANT** and **PERMANENT** (albeit temporarily invisible) damage to trees. Such machinery, including piling rigs, shall be kept at **ALL** times outside the root protection areas as indicated in the tree details table appended, and/or shall be subject to **SPECIAL METHODS** below. Fences to protect trees shall be respected as **TOTAL EXCLUSION** fences. Hence, before any site activity, including demolition, the fence lines shall be complete. Protective fencing and any temporary protection of ground surfaces will have to be removed in due course to allow finishing of landscaping, paving, etc., but this shall not take place until all need for vehicular access to the site has passed, and shall be agreed with arboriculturist / planners on site during progress of works.

#### **06.02**

##### **TREE PROTECTION – SPECIAL METHODS**

##### **PRE-CONSTRUCTION**

**PLEASE READ WITH PLAN REFERENCE 1-38-3644/P2, APPENDED.**

The Methods shall be implemented in the order given unless it is stated to the contrary.

**Method 1 : Supervision by an arboriculturist shall take place at key points in the construction process, and additionally whenever required by the architect or LPA. These key stages are :**

- 1) At site possession by contractor, outline all tree protection measures with site agent and resolve any issues arising. Ensure tree work including any minor accommodatory tree work required for erection of scaffolding near trees is carried out to specification and sign off. Ensure protective fencing is erected and completed as proposed. Ensure site huts, mixing sites for mortars, disposal-to-skip sites, etc., are located appropriately, and sign off.
- 2) Supervise lifting of hard surfacing near trees.
- 3) Supervise laying of geotextile combination ground protection and sign off.
- 4) Attend as required to supervise digging for and the laying of lighting cable ducts or services.
- 5) Approve timing of removal of protective fencing (post main phase) and sign off.


#### **Method 2 : TREE WORK**

Tree work shall be in accordance with the provided specification and good arboricultural practice, and to BS 3998:2010 'Tree Work - Recommendations'.

#### **Method 3 : TREE PROTECTION FENCING**

Tree protection fencing shall be erected, consisting of 'Heras' type fencing (weld-mesh panels), each section securely attached to uprights driven at least 0.6m into ground, as per the layout as shown on the plan (pink lines). No ground levels reduction or excavation shall take place within (=the tree side of) the fence lines. The standard rubber supports ('elephant's feet') shall if used, be as per BS 5837:2012 section 6, figure 3, left.

Figure 3 Examples of above-ground stabilizing systems

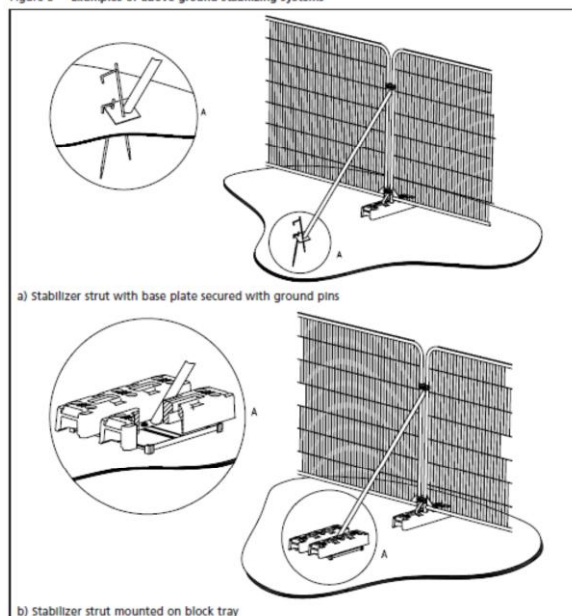

(‘elephant’s feet’) shall if used, be as per BS 5837:2012 section 6, figure 3, left.

Below the crowns of trees with branches extending to less than 2m above ground level, in order to avoid unnecessary pruning, it is permissible to replace sections with manufactured boards at least 11mm thick (hoarding), attached securely to timber uprights driven at least 0.6m into the ground, providing the finished fence stands at least 1.5m above ground level. The fencing shall include, as indicated on plan, the protection of an area where planting is proposed.



#### **Method 4 : TEMPORARY ACCESS - INTENSIVE SITE**

This method shall apply in zone **gridded green** on plan. No reduction of levels shall take place. No wheeled or tracked machinery shall be used, except if standing on completed formation as outlined below. An HDPE impermeable membrane shall be laid over the surface ; 100mm depth sharp sand shall be laid over membrane ; edge restraint shall be of timber formwork around the entire perimeter of the zone ; such edge restraint shall stand 50mm above finished concrete-pour level to prevent concrete leaching into the soil ; concrete shall be poured to a depth of 100mm-150mm, depending on envisaged loads during construction, over sharp sand layer. On completion of construction phase or when all need for vehicular access to the zone has ceased, slab / sand /membrane shall be removed using only hand-held tools or hand-held power tools. Any subsequent works in this zone shall be carried out as per Method(s) :

#### **CONSTRUCTION PHASE**

PLEASE READ WITH PLAN REFERENCE 1-38-3644/P3A, APPENDED.

The Methods shall be implemented in the order given unless it is stated to the contrary.

#### **Method 5 : TREE PROTECTION FENCING**

Tree protection fencing shall be maintained/adjusted, as per Method 3 above. The fencing shall include, as indicated on plan, the protection of an area where planting is proposed.

#### **Method 6 : SERVICE TRENCHES**

N.B. -This applies to ALL services : Electricity, gas, water, etc. Existing services shall be utilised wherever possible.

These methods shall apply generally within any RPA (**orange outlines / shapes**).

1) The trench shall be opened with an air-spade to required depth.

OR

2) The trench shall be dug with hand tools only. Probes such as screwdrivers or steel rod <10mm diameter to determine root presence ahead of digging shall be used. The work shall proceed cautiously. No roots over 20mm diameter shall be cut. Roots 20mm or more in diameter unearthed shall be temporarily protected with bubble-wrap and insulating or gaffer tape while rest of trench is dug.

OR

3) Services shall be thrust-bored using trenchless techniques (compressed air-driven 'mole') at a depth of 700mm or more below ground level, entailing no surface excavation. Starter pits for rams shall be outside any RPA, or reception/starter pits shall be opened according to 1) or 2) above.

#### **Method 7 : CONTIGUOUS PILE WALL – FACILITATION TRENCH**

This method shall apply in the zone solid cyan on plan. An access trench shall be opened with hand tools only (in the position indicated on plan), to a depth of 600mm below ground level. Any roots encountered shall be trimmed neatly to the side of the trench closest to the tree with a sharp edge tool, sharp hand saw or secateurs. Chainsaws shall not be used. The roots shall be trimmed at right angles to the long axis of the root. No paint or other treatment shall be applied to the cut ends. An HDPE membrane shall be applied vertically to the exposed soil face closest to the tree, retained in position by vertically placed manufactured board extending the full depth and width of the vertical face of the trench. The boards shall be 22mm thickness and shall be retained in position during the piling operations by timber pegs or held with wing nuts on tie rods passed diagonally through the sheeting into the soil face.

#### **Method 8 : TRANSITION FROM TEMPORARY ACCESS TO PERMANENT POROUS DRIVEWAY /CAR PARKING**

This method shall apply in zone gridded green on plan. On completion of construction phase or when all need for construction-related access to the zone has ceased, the temporary slab / sand /membrane shall be removed using only hand-held tools or hand-held power tools. The underlying sub-base shall be left undisturbed if it is competent to support the domestic-use loads envisaged. Otherwise no excavation below the underside of the existing sub-base shall take place. A 2D geotextile such as 'Treetex' type, shall be laid directly on the ground surface or over existing sub-base. Levels can be corrected by use of granite chippings NO FINES. Slabs or pavements shall be laid open-jointed and the joints rammed with granite chippings. (All design subject to engineering approval, but used on other sites and known to be practicable and reliable).

#### **Method 9 : GROUND PREPARATION FOR TREE PLANTING AREAS**

This method shall apply after completion of main build only. Ground preparation for tree planting areas shall entail removal of hard surfacing using hand tools or hand-held power tools only, the removal of degraded or compacted or contaminated soil to a depth of at least 0.6m below finished surrounding ground level. The base and sides of the pit shall be forked over to at least one hand fork's spit in depth. Screened topsoil (to BS3882 : 2007- multi-purpose topsoil) shall be laid to replace soil volume removed and to a minimum depth of 0.6m within 1.3m of the trunk location of each tree to be planted. Soil handling of any kind shall take place only after a minimum of 3 days after heavy rain, and shall where possible be carried out 7 days or more after such rainfall. Tree planting shall be in accordance with British Standard 8545:2014 'Trees : from nursery to independence in the landscape - Recommendations'. This enshrines good arboricultural practice: the tree shall be planted so that the root collar lies at finished ground level, shall be short-staked and tied with proprietary tree tie. Any hedging whips shall be staked and protected with proprietary growing tube. The ground surface shall be mulched within 0.75m of the trunk location to a

depth of 100mm with composted organic material or proprietary mulch mat.

Method 10 : In addition to the above, careful general operation and site handling shall be observed as outlined at 06.03 below.

### 06.03

#### GENERAL TREE PROTECTION METHODS

- A) No fires shall be made on any part of the site, or within 20m of any tree to be retained.
- B) No spilling or free discharge of wet mortar, concrete, fuels, oils, solvents, or tar shall be made on any part of the site.
- C) No storage of wet materials shall be made within the protective fences.
- D) No breaching or moving of the protective fences shall take place without the approval of an arboriculturist.

### 06.04

It is recommended that acceptance of the recommendations in this report is demonstrated by, for example, the architect specifying in writing to the building contractor that tree care conditions apply in execution of the contract, and by an estimate or written undertaking from the contractor to the architect demonstrating that the practical aspects of observation of such recommendations have been priced in.

## 07

### General

If conflicts between any part of a tree and the building(s) arise in the course of development these can often be resolved quickly and at little cost if a qualified arboriculturist is consulted promptly. Lack of such care is often apparent quickly and decline and death of such trees can spoil design aims and can of course affect saleability, and reflect poorly on the construction and design personnel involved. Trees that have been the recipients of careful handling during construction add considerably to the appeal and value of the finished development.

-----  
22<sup>nd</sup> May 2015

Signed:



John C. M. Cromar, Dip.Arb.(RFS) F.Arbor A.

01582 808020 / 07860 453072

## APPENDICES

08

### Tree Data

Tree number prefix(es)	Tree number	Tree type	Height range (m)	Height	Stem diameters	Radius of RPA if circle (mm)	RPA (m <sup>2</sup> )	Comments	Life expectancy (years)	Assessed BS5837 value category
	1	lime	11–15		518	6216	121	Tap test (for sonority) normal. Street tree	40+	B1
	2	<i>Eucalyptus</i>	11–15	11	417, 475, 485, 505	11319	403	Tap test (for sonority) normal. Mass of tightly appressed stems with weak unions forming. Reduced in height c.2013. Apparently growth from once-coppiced stool.	20+	B1
	3	Portugal laurel	5–10		375	4500	64	Decay noted in trunk	<10	U
	4	wild cherry	5–10		346	4152	54	Tap test indicates patch of decay on SE side of tree. Harshly pruned in past, low vitality.	<10	U
XG	5	Leyland cypresses	5–10		150	1800	10	O/s site. Useful screen.	40+	B2
G	6	Judas tree	<5		110	1320	5	Young trees	20+	C1
	7	<i>Catalpa</i>	5–10		110	1320	5	Ivy covered	20+	C1
	8	apple	<5		170	2040	13	Tap test (for sonority) normal.	20+	C1
	9	apple	<5		150	1800	10	Recumbent. Decayed.	<10	U

09  
Schedule

*Trees at 4 Wedderburn Road, London, NW3 5QE*

Please read in conjunction with plan 1-38-3644/P2.

Tree number prefix(es)	Tree number	Tree type	Height range (m)	Height	Stem diameters	Comments
	3	Portugal laurel	5–10		375	Remove, including stumps.
	4	wild cherry	5–10		346	
G	6	Judas tree	<5		110	
	7	<i>Catalpa</i>	5–10		110	
	8	apple	<5		170	
	9	apple	<5		150	

NOTES:

All tree work should be carried out to BS 3998 : 2010 'Tree Work - Recommendations'. The Wildlife and Countryside Act 1981 protects with certain exceptions all birds and their nests. It is an offence to destroy such nests or take or injure such birds in the course of tree works operations. If a tree is a bat-roost, a licence to work on the tree must first be obtained from the relevant Statutory Nature Conservation Organization (in England : Natural England 0845 601 4523.) Acting without a licence is likely to be justifiable only in acute emergencies threatening human life and where all other legally available option such as footpath diversion, fencing and warning signs cannot be applied.

Ivy and dead wood can be important ecological features. Ivy where specified in the work schedule should be treated as per BS3998 section 7.12. In summary this means trimming back (e.g. with a hedge cutter or secateurs) to near the line of the trunk or branches, and/or removing selected stems so that the structure of the tree can be inspected. In practice this may need to be done outside the bird-nesting season. Treatment of dead wood shall be as per section 7.3.2 – essentially shorten if possible, thus retaining some resource for invertebrates, etc.

10

Plans



1-38-3644/P1

1-38-3644/P2

1-38-3644/P3A

**KEY TO PLAN SYMBOLS**

- GREEN - High Value
- BLUE - Moderate Value
- BLACK - Low Value
- RED - Remove/Very short life expectancy
- ORANGE SHAPES: Root Protection Areas

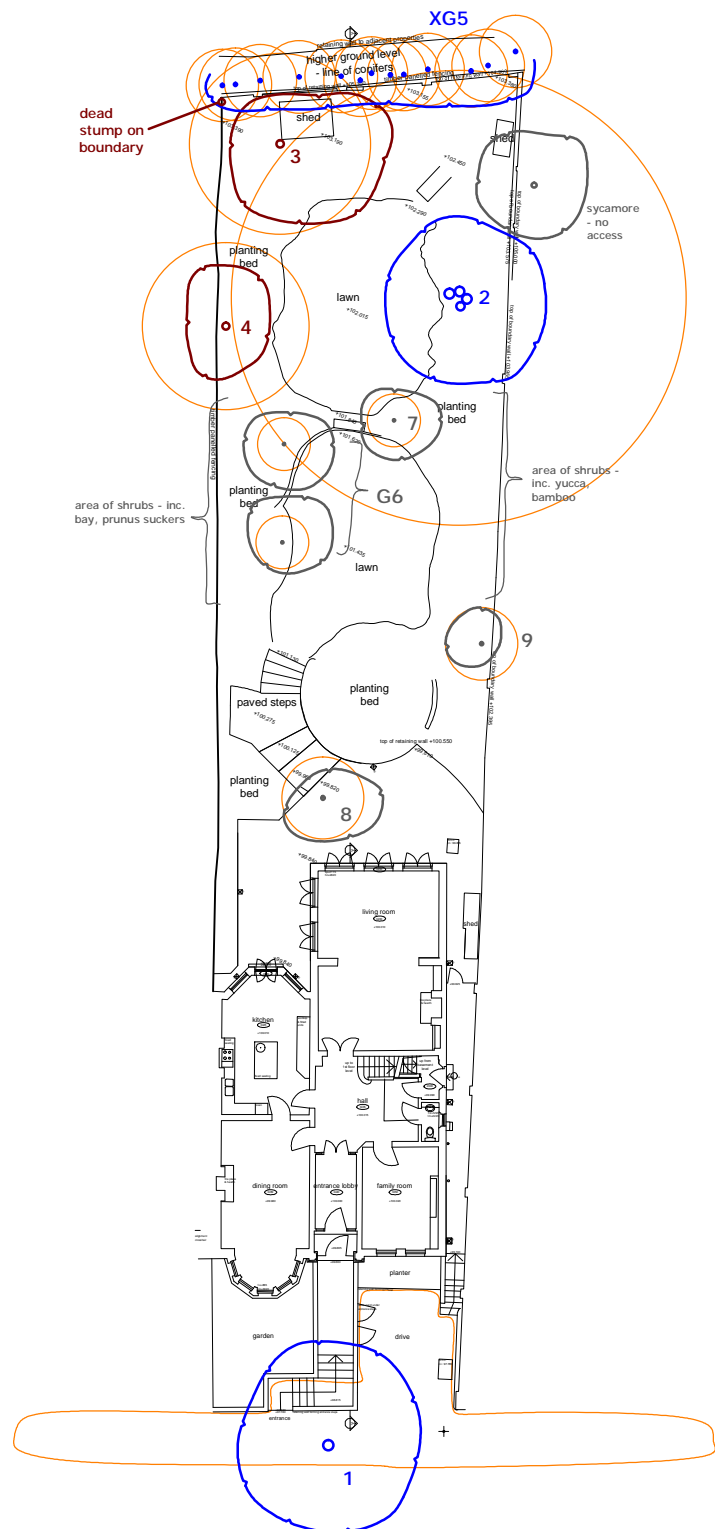

**JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED**

THE OLD SCHOOL,  
TITLEY, KINGTON,  
HR5 3RN  
*at Jericho, Oxford  
& Harpenden, Herts.*  
TEL 01582 808020  
FAX 01544 231006  
MOB 07860 453072

[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)

**TREE VALUE  
ASSESSMENT**  
as per BS5837:2012  
&  
**Root Protection Areas**

for full details of  
tree value see report  
reference 1-38-3644


4 Wedderburn Road,  
London, NW3 5QE

based on EA London  
Survey Company drg.  
S+T119-14 - 03  
supplied

ref: 1-38-3644/P1  
rev. 27.11.14  
1:250 scale @ A3

**KEY TO PLAN SYMBOLS**

PINK LINES: Tree Protection Fencing  
 ORANGE SHAPES: Root Protection Areas  
 GREEN HATCH: method applies - see report ref. 1-38-3644

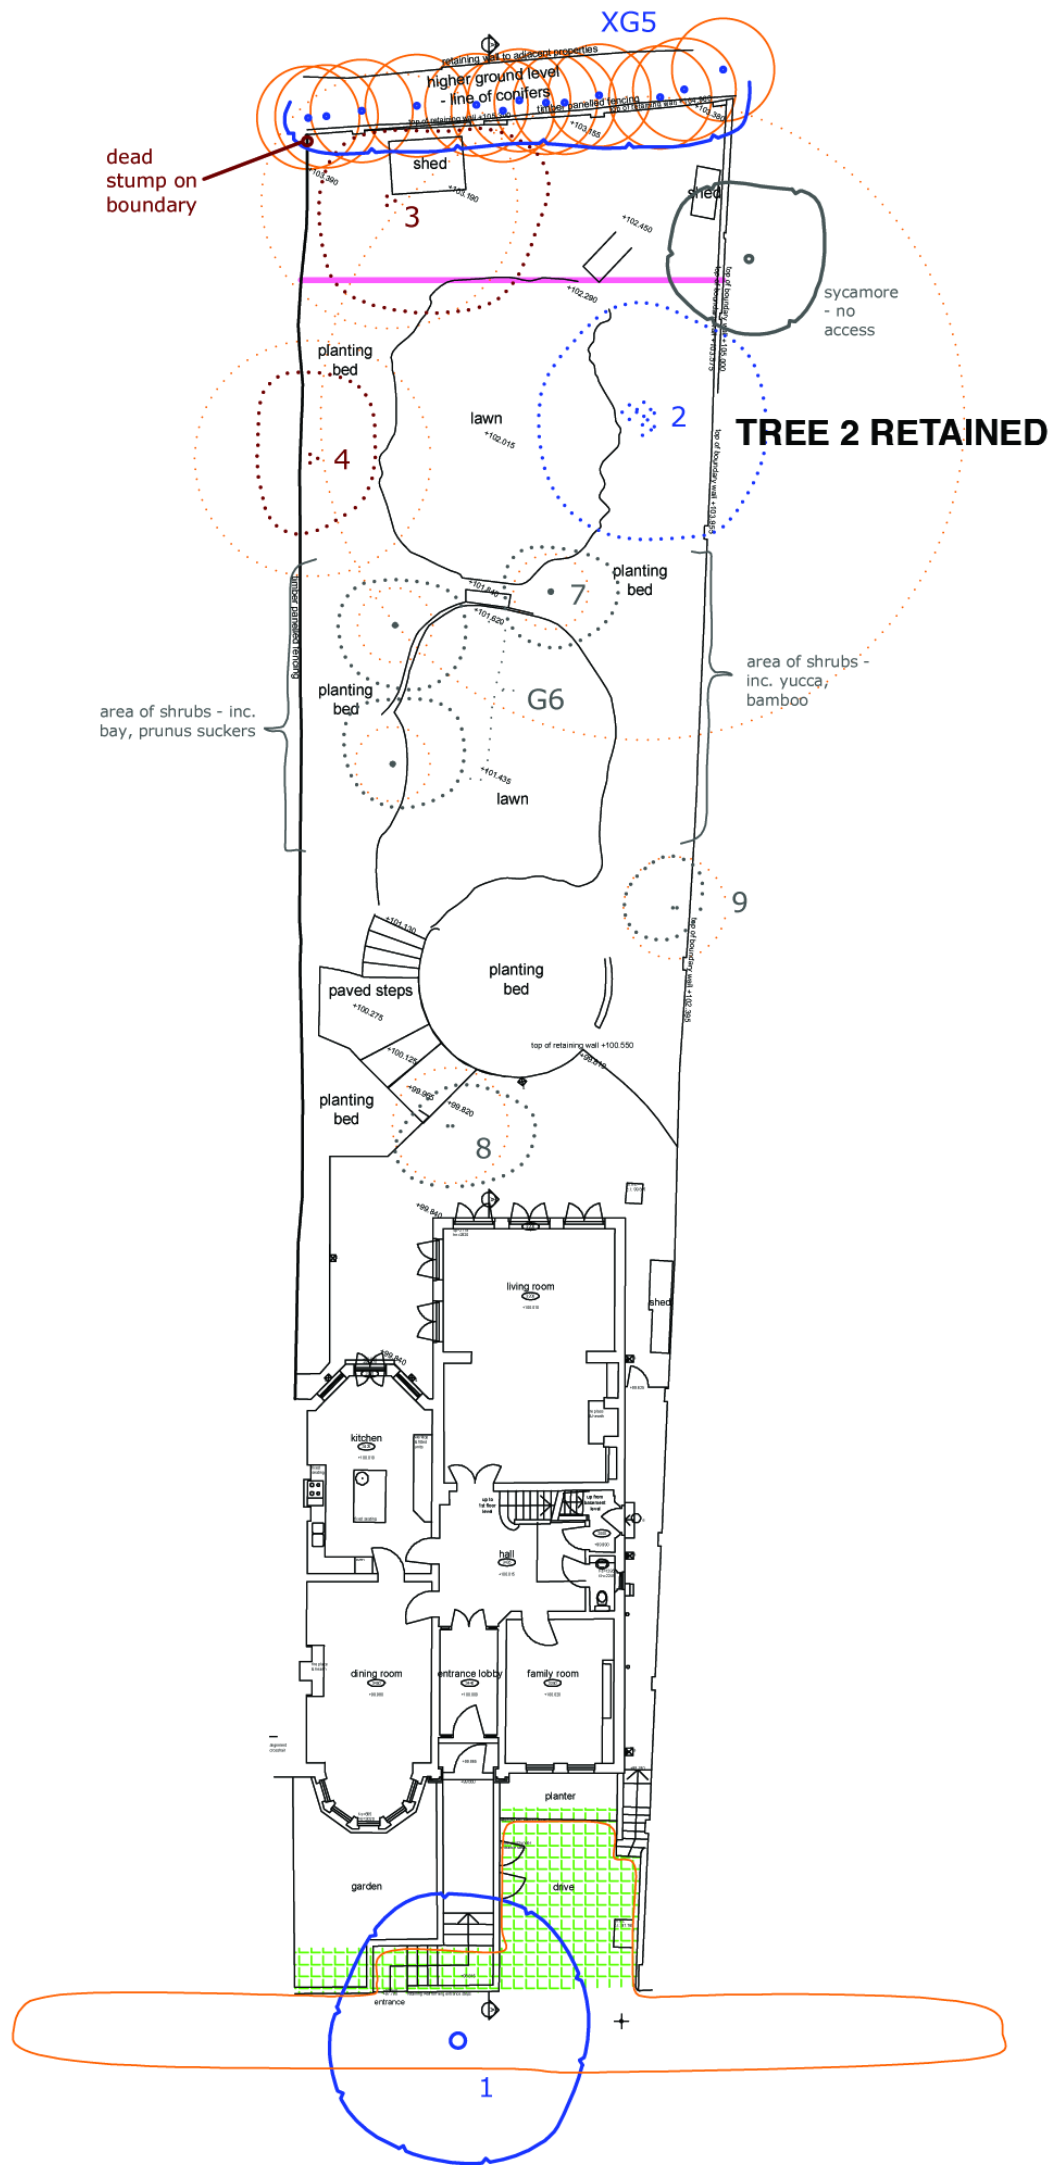

**JOHN CROMAR'S  
 ARBORICULTURAL  
 COMPANY  
 LIMITED**

THE OLD SCHOOL,  
 TITLEY, KINGTON,  
 HR5 3RN  
*at Jericho, Oxford  
 & Harpenden, Herts.*  
 TEL 01582 808020  
 FAX 01544 231006  
 MOB 07860 453072

[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)

**TREE RETENTION  
 and  
 TREE PROTECTION  
 MEASURES  
 (Site Preparation Phase)**

for fuller details of  
 protection measures  
 see report reference  
 - -

4 Wedderburn Road,  
 London, NW3 5QE


based on EA London  
 Survey Company drg.  
 S+T119-14 - 03 supplied

ref: 1-38-3644/P2  
 rev. 04.12.14  
 1:250 @ A3 scale



**KEY TO PLAN SYMBOLS**

PINK LINES: Tree Protection Fencing  
ORANGE SHAPES: Root Protection Areas  
GREEN HATCH: method applies - see report ref. 1-38-3644

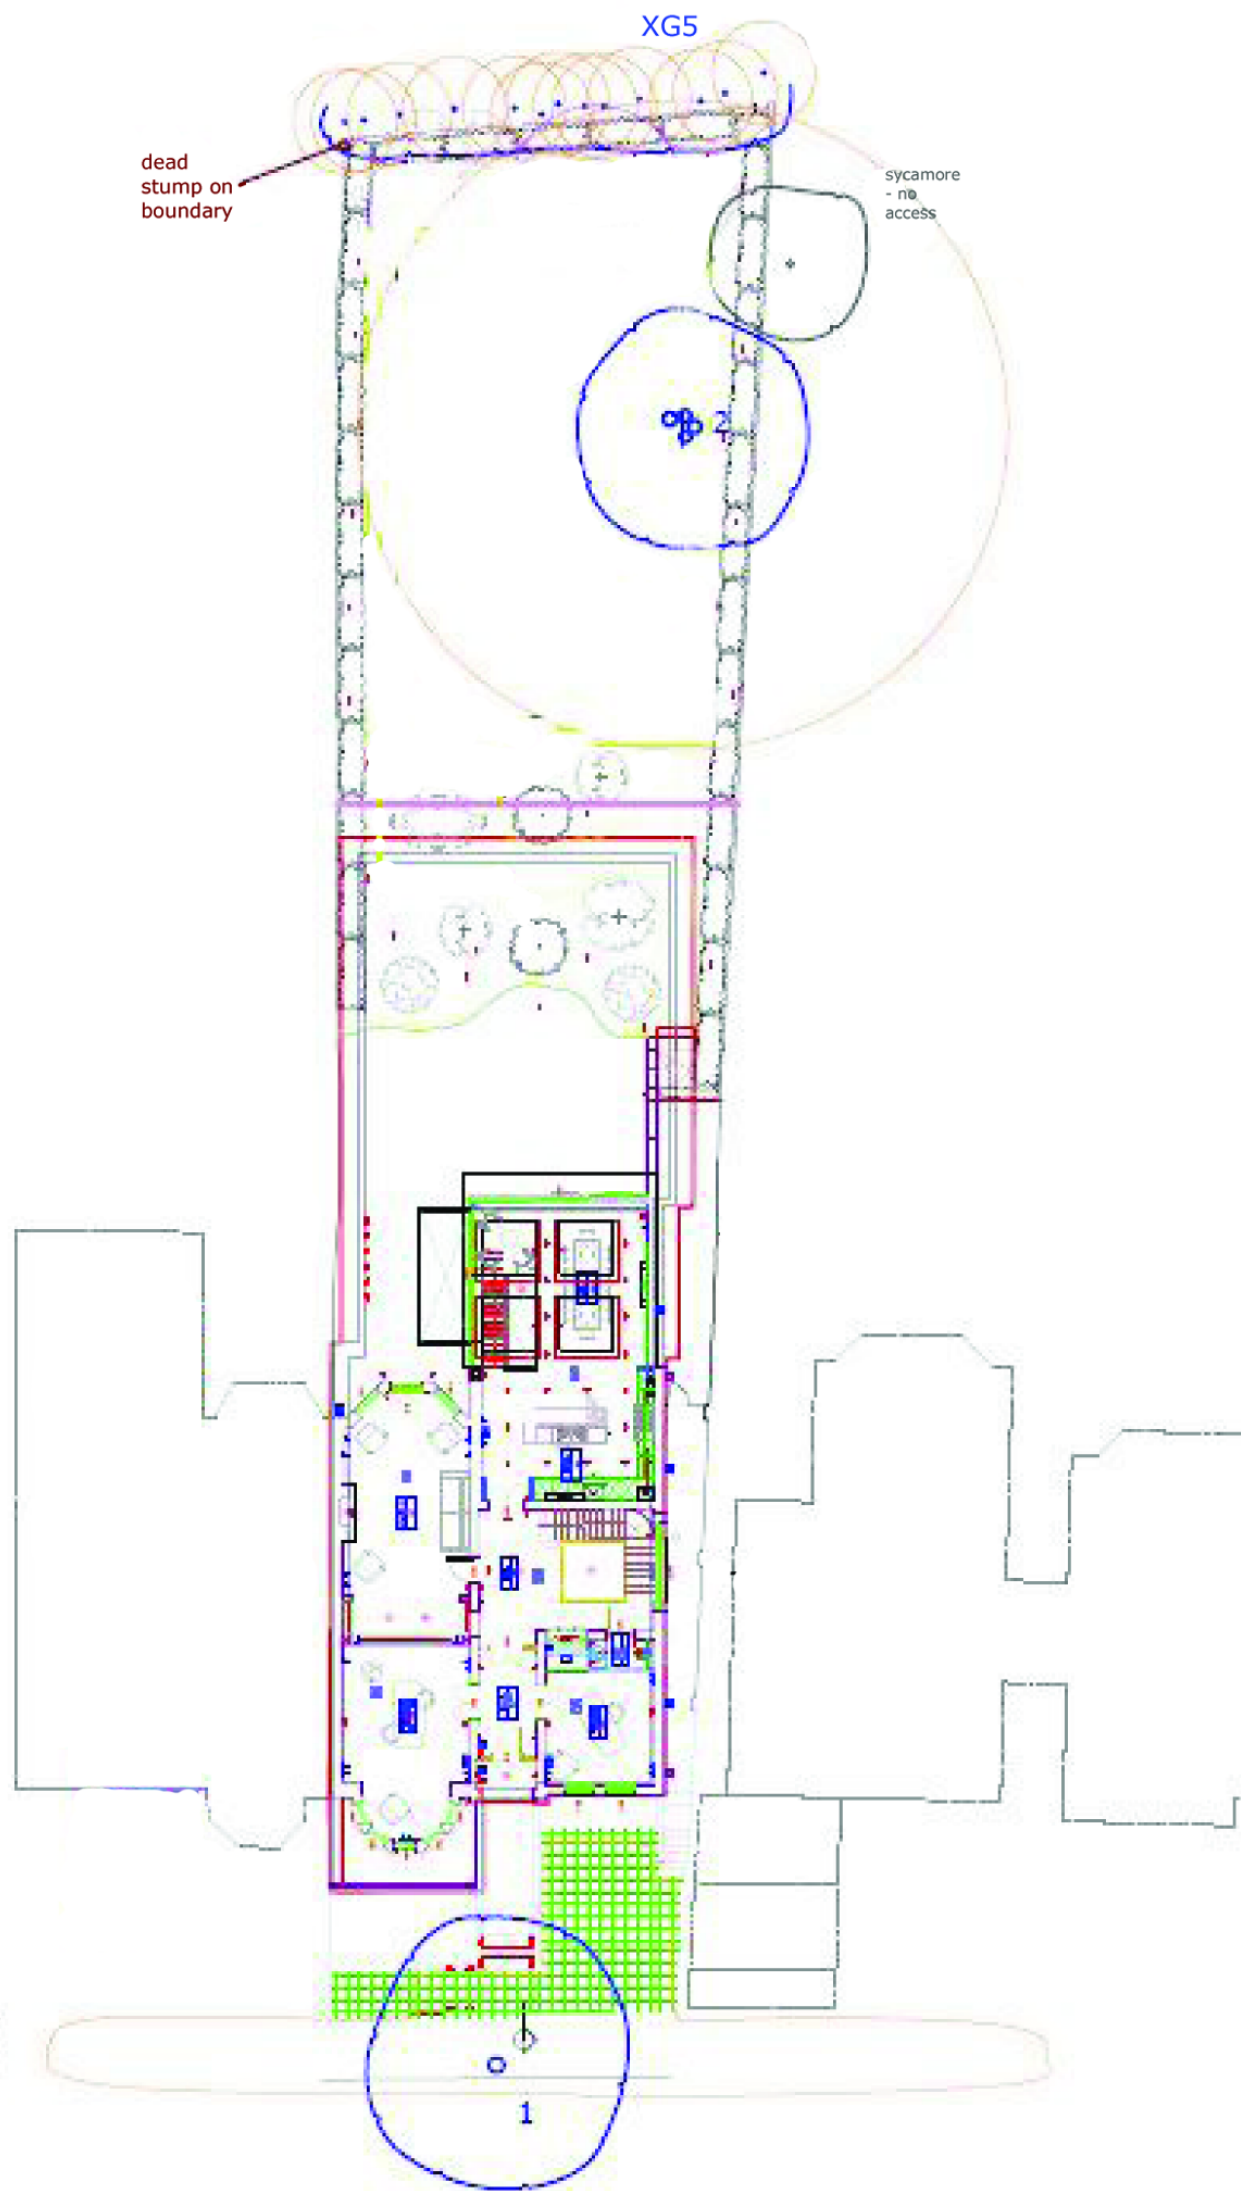

**JOHN CROMAR'S  
ARBORICULTURAL  
COMPANY  
LIMITED**

THE OLD SCHOOL,  
TITLEY, KINGTON,  
HR5 3RN  
at Jericho, Oxford  
& Harpenden, Herts.  
TEL 01582 808020  
FAX 01544 231006  
MOB 07860 453072

[admin@treescan.co.uk](mailto:admin@treescan.co.uk)  
[www.treescan.co.uk](http://www.treescan.co.uk)

**TREE RETENTION  
and  
TREE PROTECTION  
MEASURES  
(Construction Phase)**

for fuller details of  
protection measures  
see report reference  
- -

4 Wedderburn Road,  
London, NW3 5QE

based on Stiff + Trevillion  
Archs. drg. no. 2 005 06  
supplied

ref: 1-38-3644/P3A  
rev. 17.03.15  
1:250 @ A3 scale