


39a ROSSLYN HILL

APPENDIX D – CONSTRUCTION METHOD STATEMENT

SUGGESTED CONSTRUCTION SEQUENCE DRAWINGS

No.37 (GARDEN NEARER TO REAR OF PROPERTY IS ALSO TERRACED)

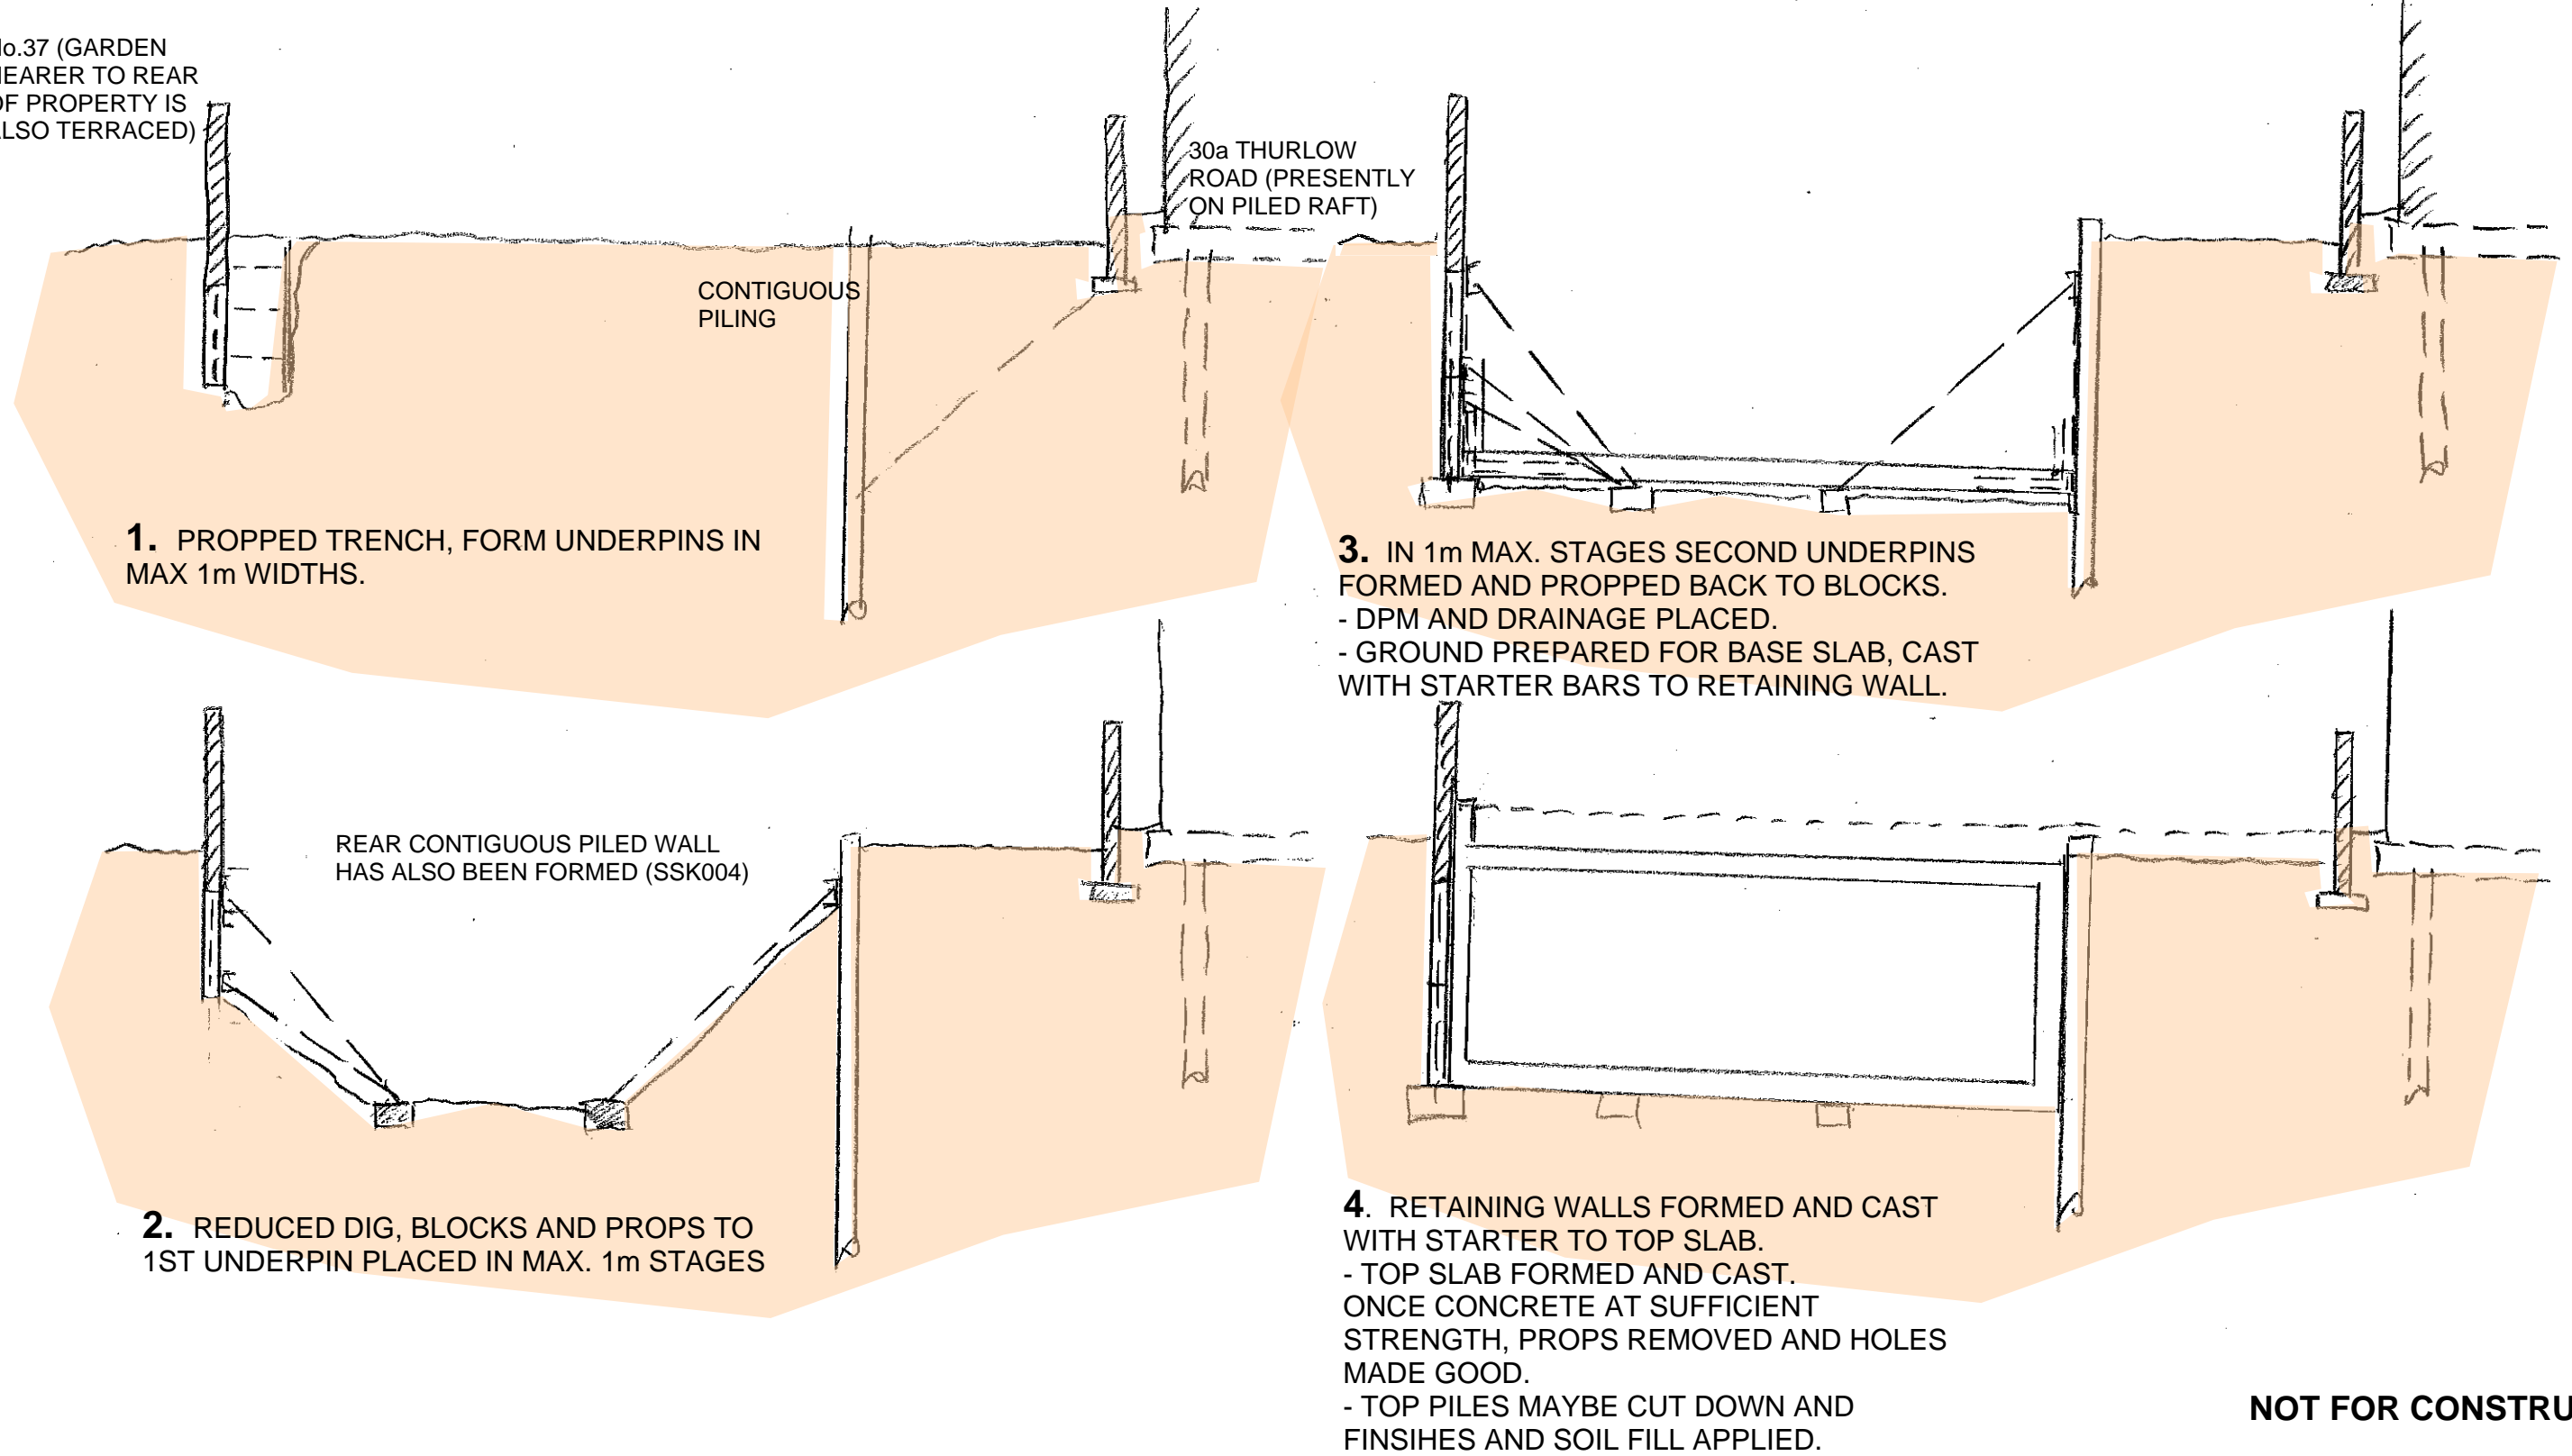

NOT FOR CONSTRUCTION

SEQUENCE CONSTRUCTION TO GARDEN WALL WITH No. 37 ROSSLYN HILL.
SECTION C-C ON SCHEME PLANS.
 REFER TO SSK004 FOR DETAIL SEQUENCING REGARDING PILED WALL.
 FINAL DETAILED SEQUENCING BY CONTRACTOR.

conisbee

Consulting Structural Engineers
 Consulting Civil Engineers

1-5 Offord St
 London N1 1DH
 Tel 020 7700 6666
 Fax 020 7700 6686
 design@conisbee.co.uk
 www.conisbee.co.uk

Project

39a ROSSLYN HILL, NW3

Title

CONSTRUCTION METHOD STATEMENT :
 SUGGESTED SEQUENCE GARDEN WALL WITH No.
 37 ROSSLYN HILL (REF. REPORT 5.4)

Rev	Date	Description	Drawn	Check
-----	------	-------------	-------	-------

Drawing Status
 PLANNING

Project No
140321

Date
 OCT 2015

Drawn
 HH

Drawing No
SSK003

Scale
 NTS

Engineer
 HH


Revision
 -




1. CONTIGUOUS PILED WALL FORMED




4. BASE SLAB CAST INCLUDING STARTER BARS TO RETAINING WALL

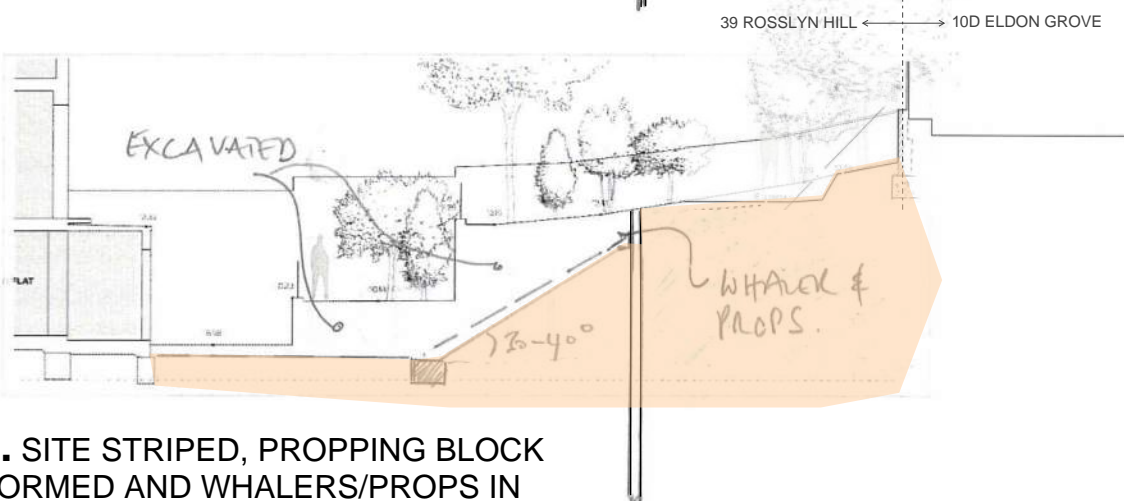


2. SITE STRIPED, PROPPING BLOCK FORMED AND WHALERS/PROPS IN PLACE

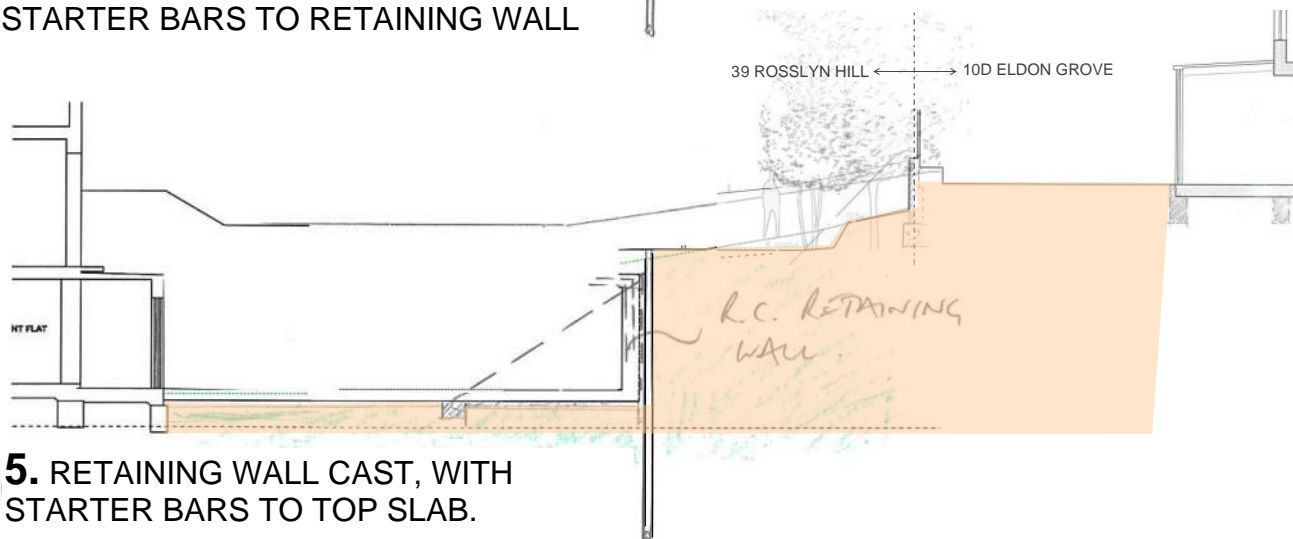

5. RETAINING WALL CAST, WITH STARTER BARS TO TOP SLAB.

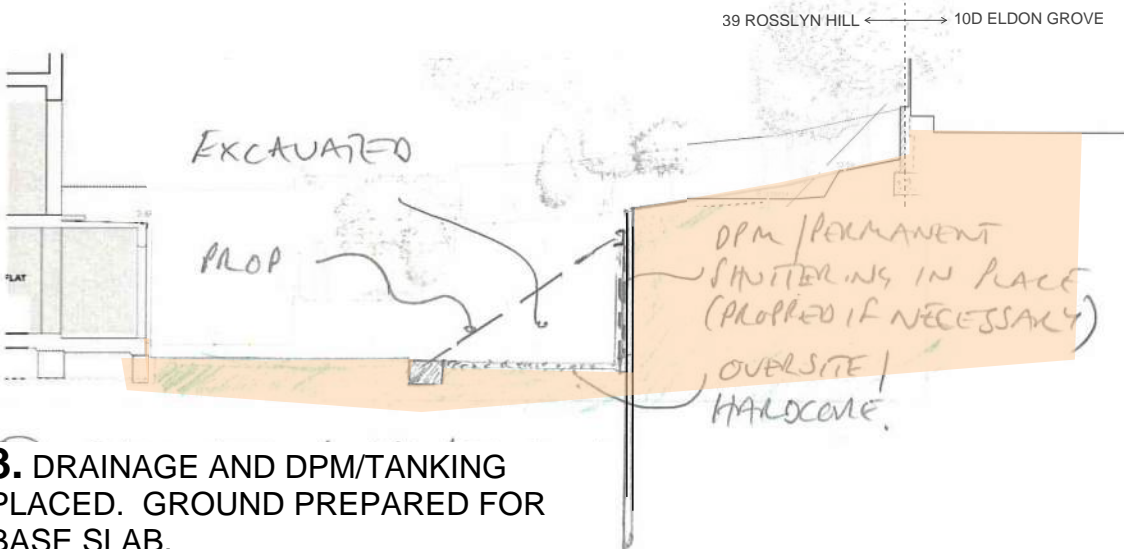

3. DRAINAGE AND DPM/TANKING PLACED. GROUND PREPARED FOR BASE SLAB.

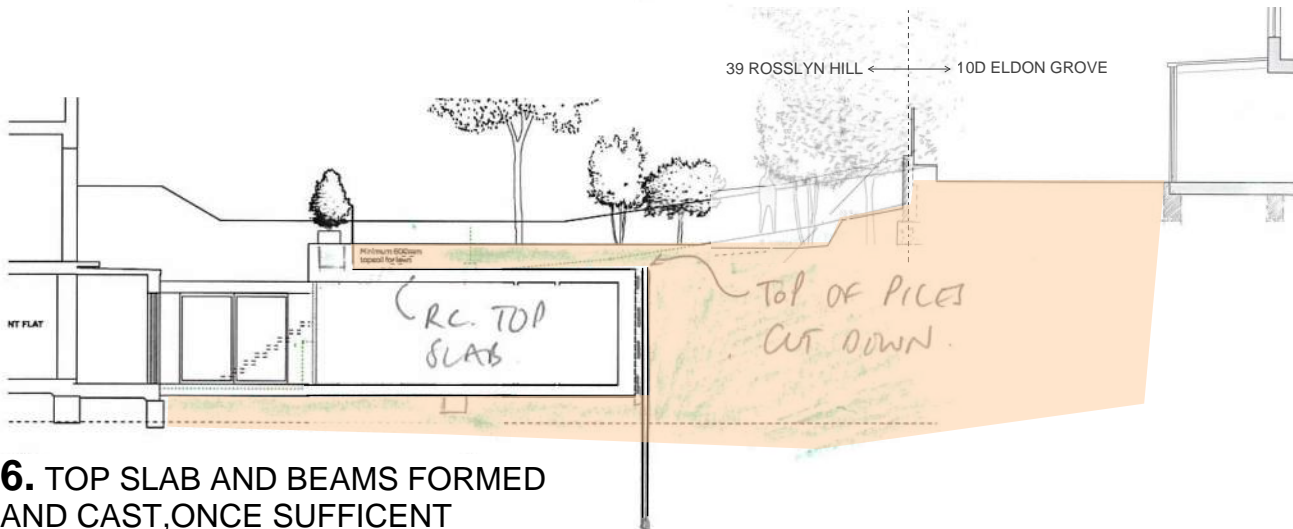

6. TOP SLAB AND BEAMS FORMED AND CAST, ONCE SUFFICIENT STRENGTH ACHIEVED, PROPS & WHALERS REMOVED. HOLES MADE GOOD, FINISHES PLACED.

SEQUENCING DRAWINGS 1-6 BASED ON SECTION A-A, S200

NOT FOR CONSTRUCTION

conisbee
Consulting Structural Engineers
Consulting Civil Engineers

1-5 Offord St
London N1 1DH
Tel 020 7700 6666
Fax 020 7700 6666
design@conisbee.co.uk
www.conisbee.co.uk

Project
39a ROSSLYN HILL, NW3

Title
CONSTRUCTION METHOD STATEMENT :
SUGGESTED SEQUENCE MAIN REAR RETAINING
WALL (REF. REPORT 5.5)

Rev	Date	Description	Drawn	Check
Drawing Status		Project No		
PLANNING		140321		
Date	Drawn	Drawing No		
OCT 2015	HH	SSK004		
Scale	Engineer	Revision		
NTS	HH	-		

GARDEN TO 30a
THURLOW
ROAD/TERRACED
DOWN TO 41
ROSSLYN HILL


No.37 (GARDEN
NEARER TO REAR
OF PROPERTY IS
ALSO TERRACED)

EXISTING R.C
RETAINING WALL

EXISTING R.C. RETAINING WALLS
AND STEPS - GARDEN WALL
LIKELY TO BE UNDERPINNED.

1. IN 1m SECTIONS, EXISTING
RETAINING WALLS AND FILL
REMOVED

1. PROPPED TRENCH, FORM
UNDERPINS AND PART
RETAINING WALL IN MAX 1m
WIDTHS.

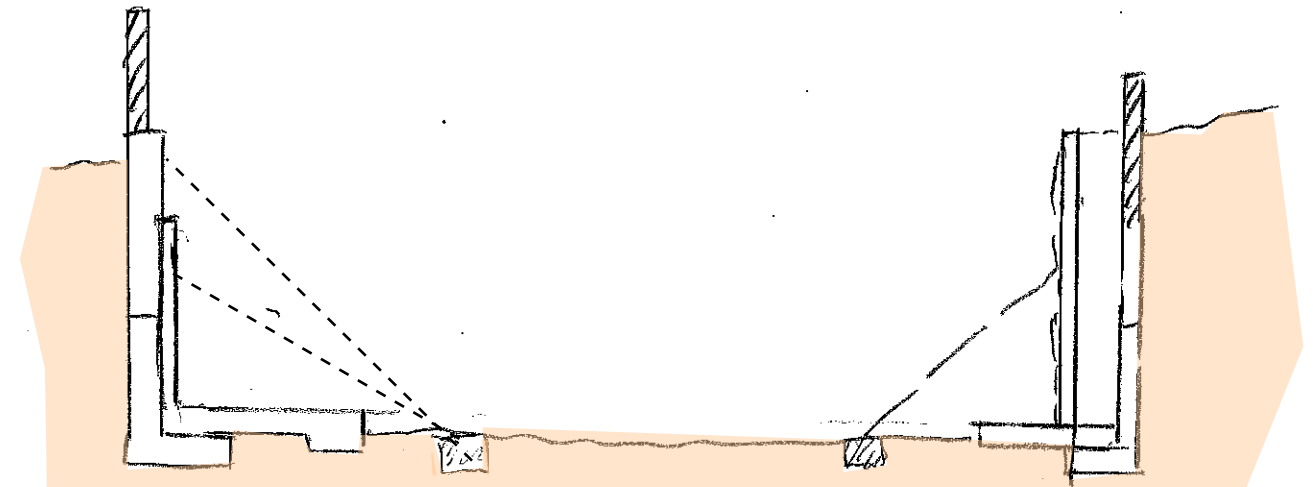


3. DPM/DRAINAGE PLACED.
INTERNAL RETAINING WALL
FORMED AND CAST.

3. NEW RETAINING PLANTER
WALL FORMED WITH
REINFORCED BUTTRESSES
TIED BACK TO GARDEN
WALL/UNDERPINS.

NOTE: IN 1m SECTIONS, EXISTING
WALLS REMOVED AND GARDEN
WALL UNDERPINNED

2. REDUCED DIG, BLOCKS
AND PROPS TO UNDERPIN
PLACED IN MAX. 1m
STAGES.

2. REDUCED DIG, BLOCKS
AND PROPS TO EXISTING
UNDERPINS AND NEW
UNDERPIN FORMED BELOW IN
MAX. 1m STAGES.

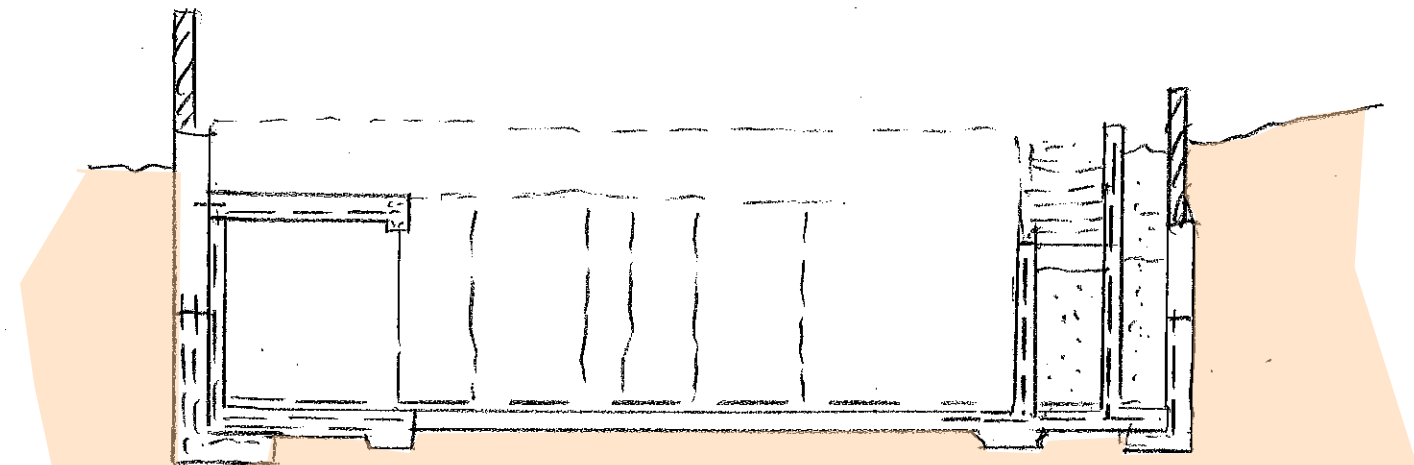

4. TOP SLAB FORMED AND CAST,
PROPS REMOVED ONCE SUFFICIENT
GAINED. HOLES MADE GOOD.

4. BASE SLAB AND STEPS
FORMED. LIGHTWEIGHT
FILL AND SOIL PLACED.

**SEQUENCE CONSTRUCTION TO GARDEN
WALL WITH No. 30a THURLOW ROAD / 41
ROSSLYN HILL, AND LOWER SECTION ON NO
37/39 GARDEN WALL.
SECTION B-B ON SCHEME PLANS.
REFER TO SSK004 FOR DETAIL SEQUENCING
REGARDING PILED WALL.
FINAL DETAILED SEQUENCING BY CONTRACTOR.**

conisbee

Consulting Structural Engineers
Consulting Civil Engineers

1-5 Offord St
London N1 1DH
Tel 020 7700 6666
Fax 020 7700 6686
design@conisbee.co.uk
www.conisbee.co.uk

Project

39a ROSSLYN HILL, NW3

Title

CONSTRUCTION METHOD STATEMENT : SUGGESTED
SEQUENCE GARDEN WALL WITH No. 41 ROSSLYN
HILL/30a THURLOW ROAD (REF. REPORT 5.6)

NOT FOR CONSTRUCTION

Rev	Date	Description	Drawn	Check
		Drawing Status		Project No
		PLANNING		140321
	Date	Drawn		Drawing No
	OCT 2015	HH		SSK005
	Scale	Engineer		Revision
	NTS	HH		-