



STAGE 5 TO THE PERIMETER OF THE NEW BASEMENT FOOTPRINT THE INSIDE FACES OF THE UNDERPINS WILL HAVE TEMPORARY DIAGONAL STRUTTING INSTALLED AS REQUIRED TO RESTRAIN THE TOPS OF THE UNDERPINS.




EXCAVATION WILL THEN PROCEED WITHIN THE BASEMENT DOWN TO SLAB AND FOOTING FORMATION LEVEL WITH FURTHER LEVELS OF TEMPORARY STRUTTING INSTALLED AS REQUIRED.

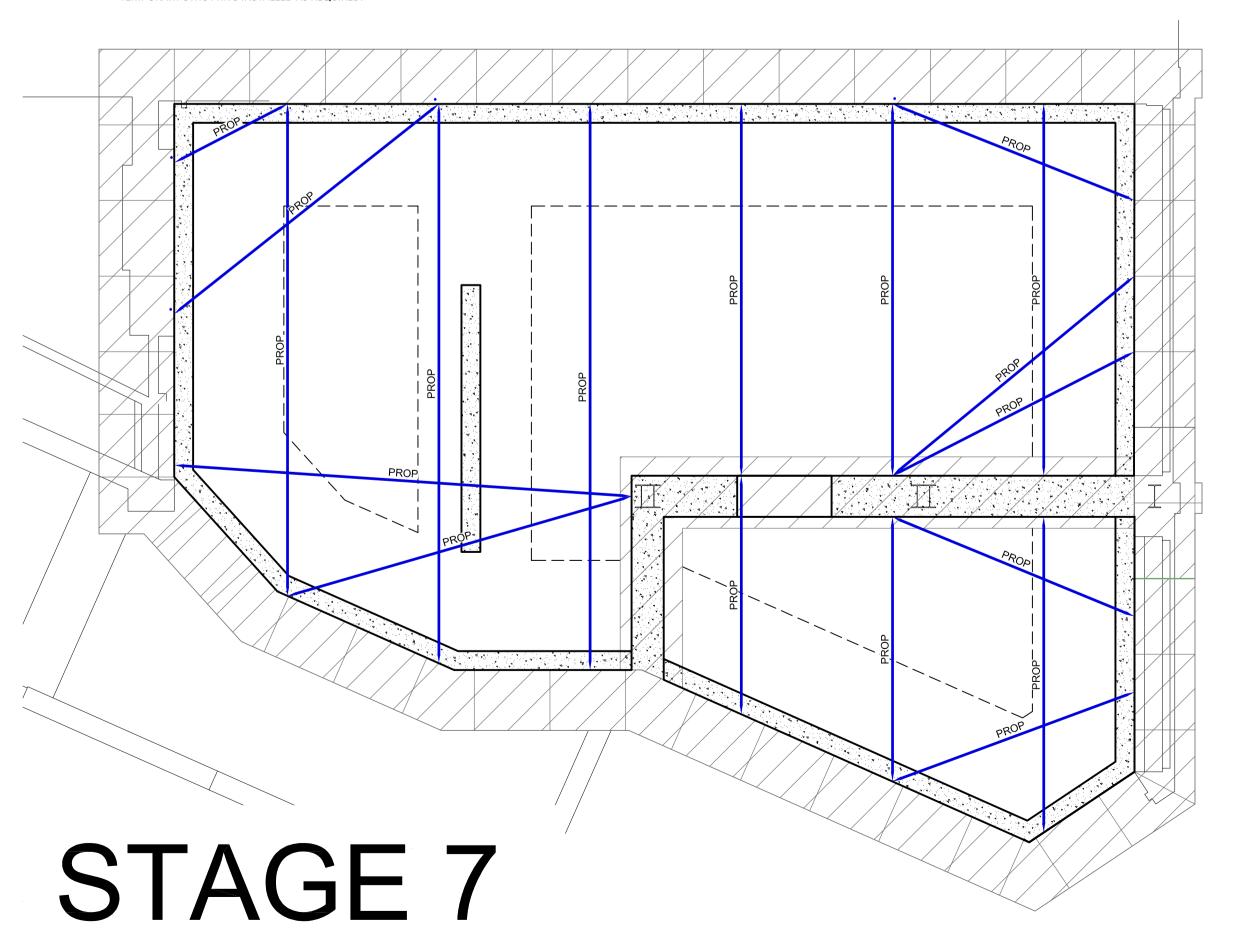

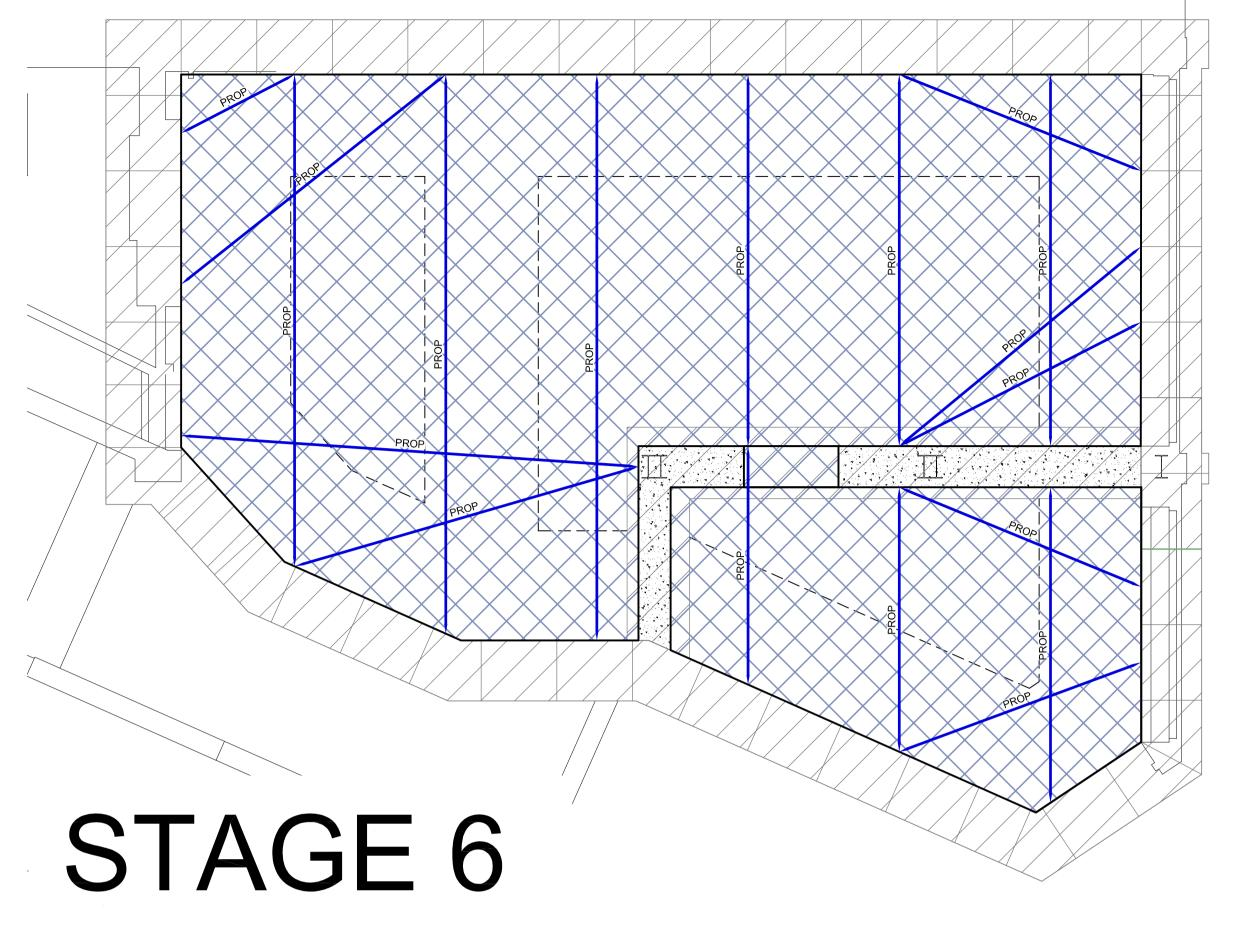

STAGE 6 CONSTRUCT NEW FOOTINGS AT BASEMENT LEVEL FOR THE NEW BASEMENT INTERNAL WALLS.

NEW PERIMETER RETAINING WALL BASES AND BASEMENT SLAB WILL BE FORMED AND CAST MONOLITHICALLY.

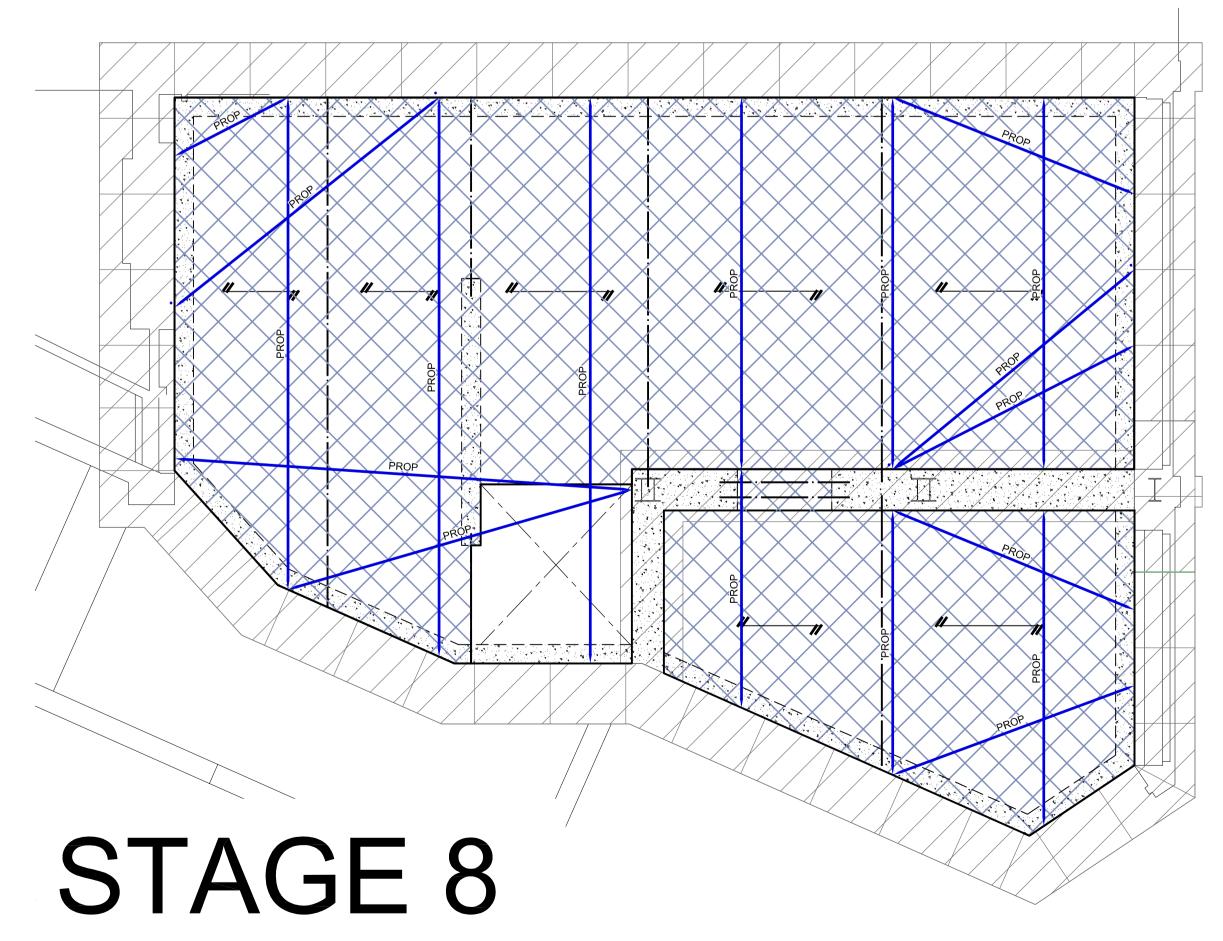

CDM REGULATIONS 2015 RESIDUAL HAZARDS RESIDUAL HAZARDS IDENTIFIED (1)

NOTES

2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ENGINEER'S AND ARCHITECT'S

3. DO NOT SCALE FROM THIS DRAWING. USE FIGURED

5. FOR SITE SETTING OUT REFER TO THE ARCHITECTS

6. FOR MATERIAL NOTES REFER TO DRAWING GEN.01

4. ALL DIMENSIONS TO BE CONFIRMED BY THE ARCHITECT

1. DO NOT SCALE THIS DRAWING.

PRIOR TO CONSTRUCTION.

DIMENSIONS ONLY.

DRAWINGS AND SPECIFICATIONS.

TEMPORARY WORKS BY MAIN CONTRACTOR -METHOD STATEMENT REQUIRED.

THIS REGISTER IS A NON-EXHAUSTIVE LIST OF RESIDUAL HAZARDS RELATING TO THE WORKS SHOWN ON THIS DRAWING THAT HAVE BEEN IDENTIFIED DURING THE DESIGN STAGE.

06/15 AB APB NOTES ADDED APB PRELIMINARY ISSUE

Lime Tree House, 15 Lime Tree Walk, Sevenoaks TN13 1YH LONDON + SEVENOAKS Tel: 03330 113 401 info@abstruct-llp.com

**4No NEW RESIDENTIAL UNITS** 465-467 FINCHLEY ROAD NW3 6HS

**BASEMENT CONSTRUCTION** SEQUENCE: STAGES 5-8

A.GOVANI

PO APB March 2015 17/03/2015 AB1115\_SEQ\_0002

NEW PERIMETER RC RETAINING WALLS AND INTERNAL RC WALL TO BE CONSTRUCTED.

INSTALL THE NEW GROUND FLOOR STEEL BEAMS AND SLABS.