



**NOTES**

- DO NOT SCALE THIS DRAWING.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ENGINEER'S AND ARCHITECT'S DRAWINGS AND SPECIFICATIONS.
- DO NOT SCALE FROM THIS DRAWING. USE FIGURED DIMENSIONS ONLY.
- ALL DIMENSIONS TO BE CONFIRMED BY THE ARCHITECT PRIOR TO CONSTRUCTION.
- FOR SITE SETTING OUT REFER TO THE ARCHITECT'S DRAWINGS.
- FOR MATERIAL NOTES REFER TO DRAWING GEN.01

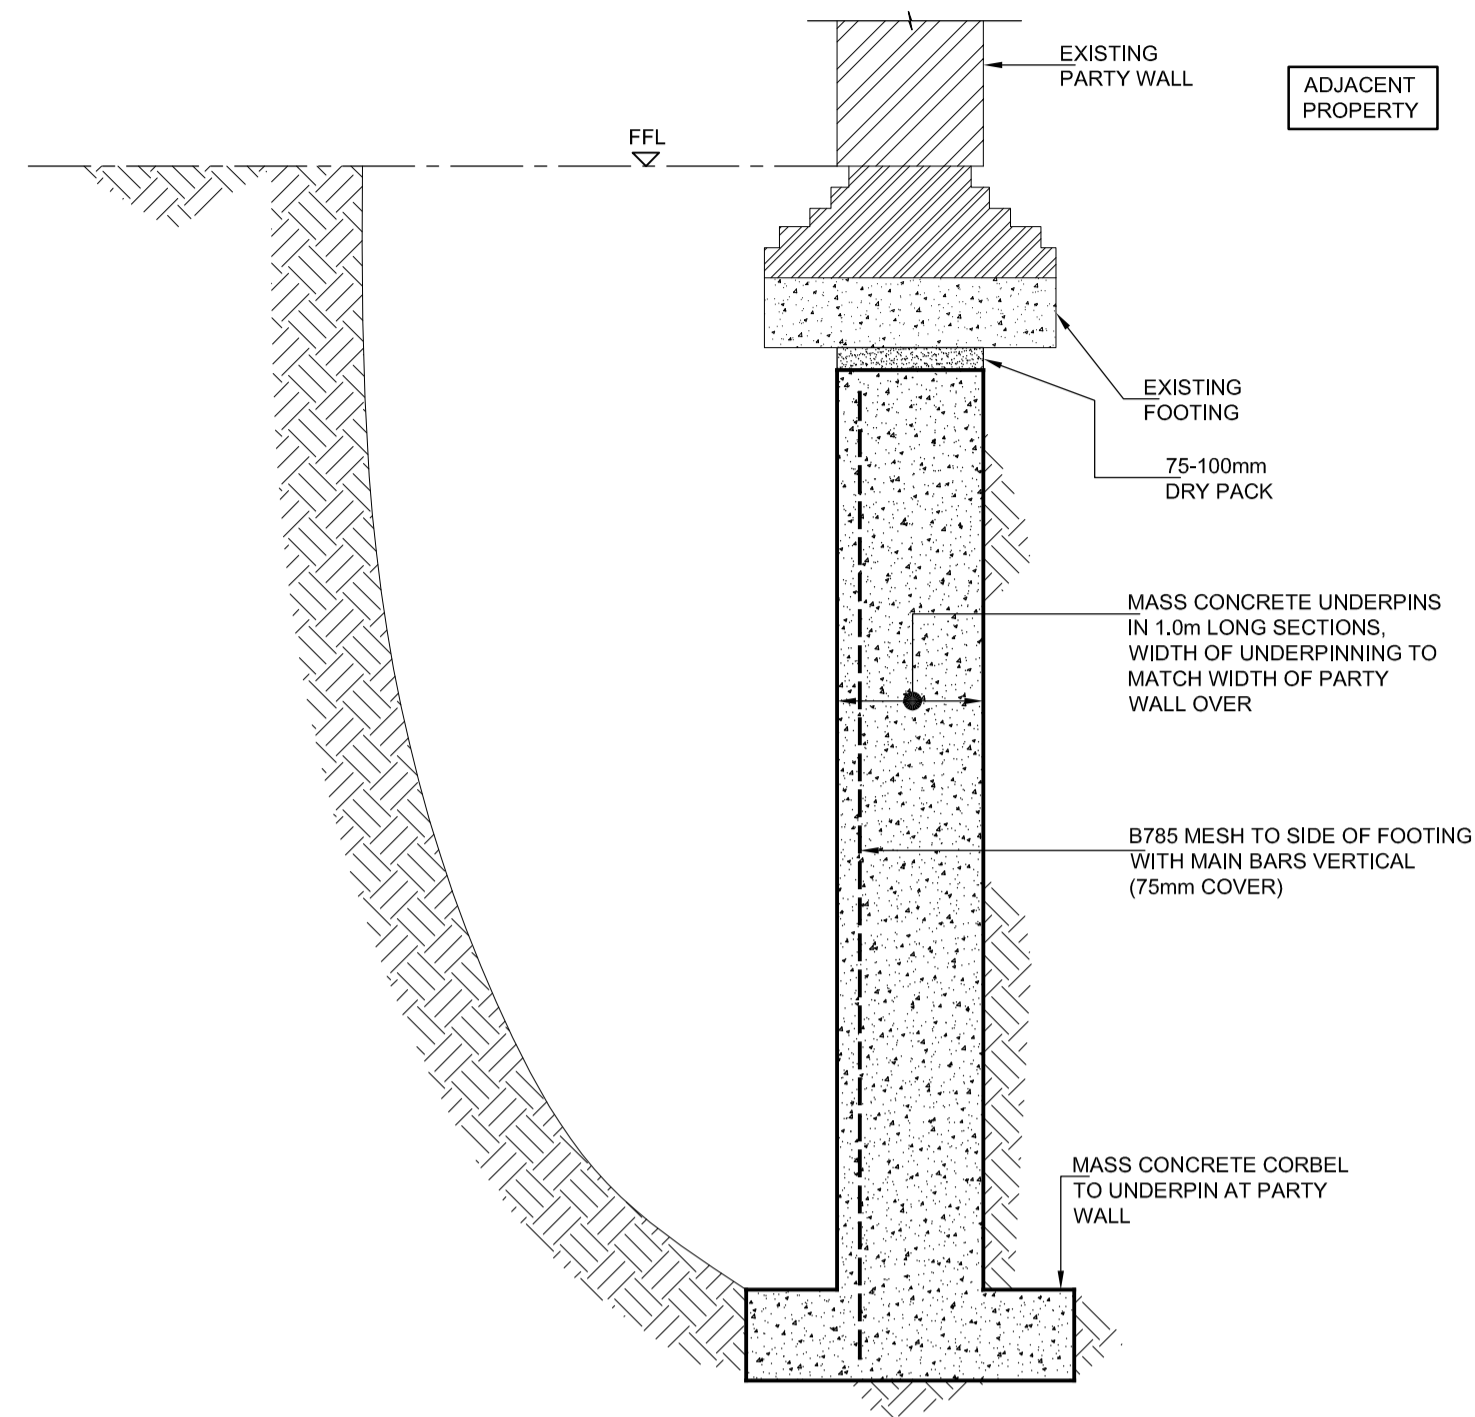


**STAGE 2:**

INSTALL NEW UNDERPINS IN 1.0m LONG SECTIONS. EXCAVATE GROUND. CAST NEW UNDERPIN THEN BACKFILL PRIOR TO EXCAVATION OF ADJACENT PINS.

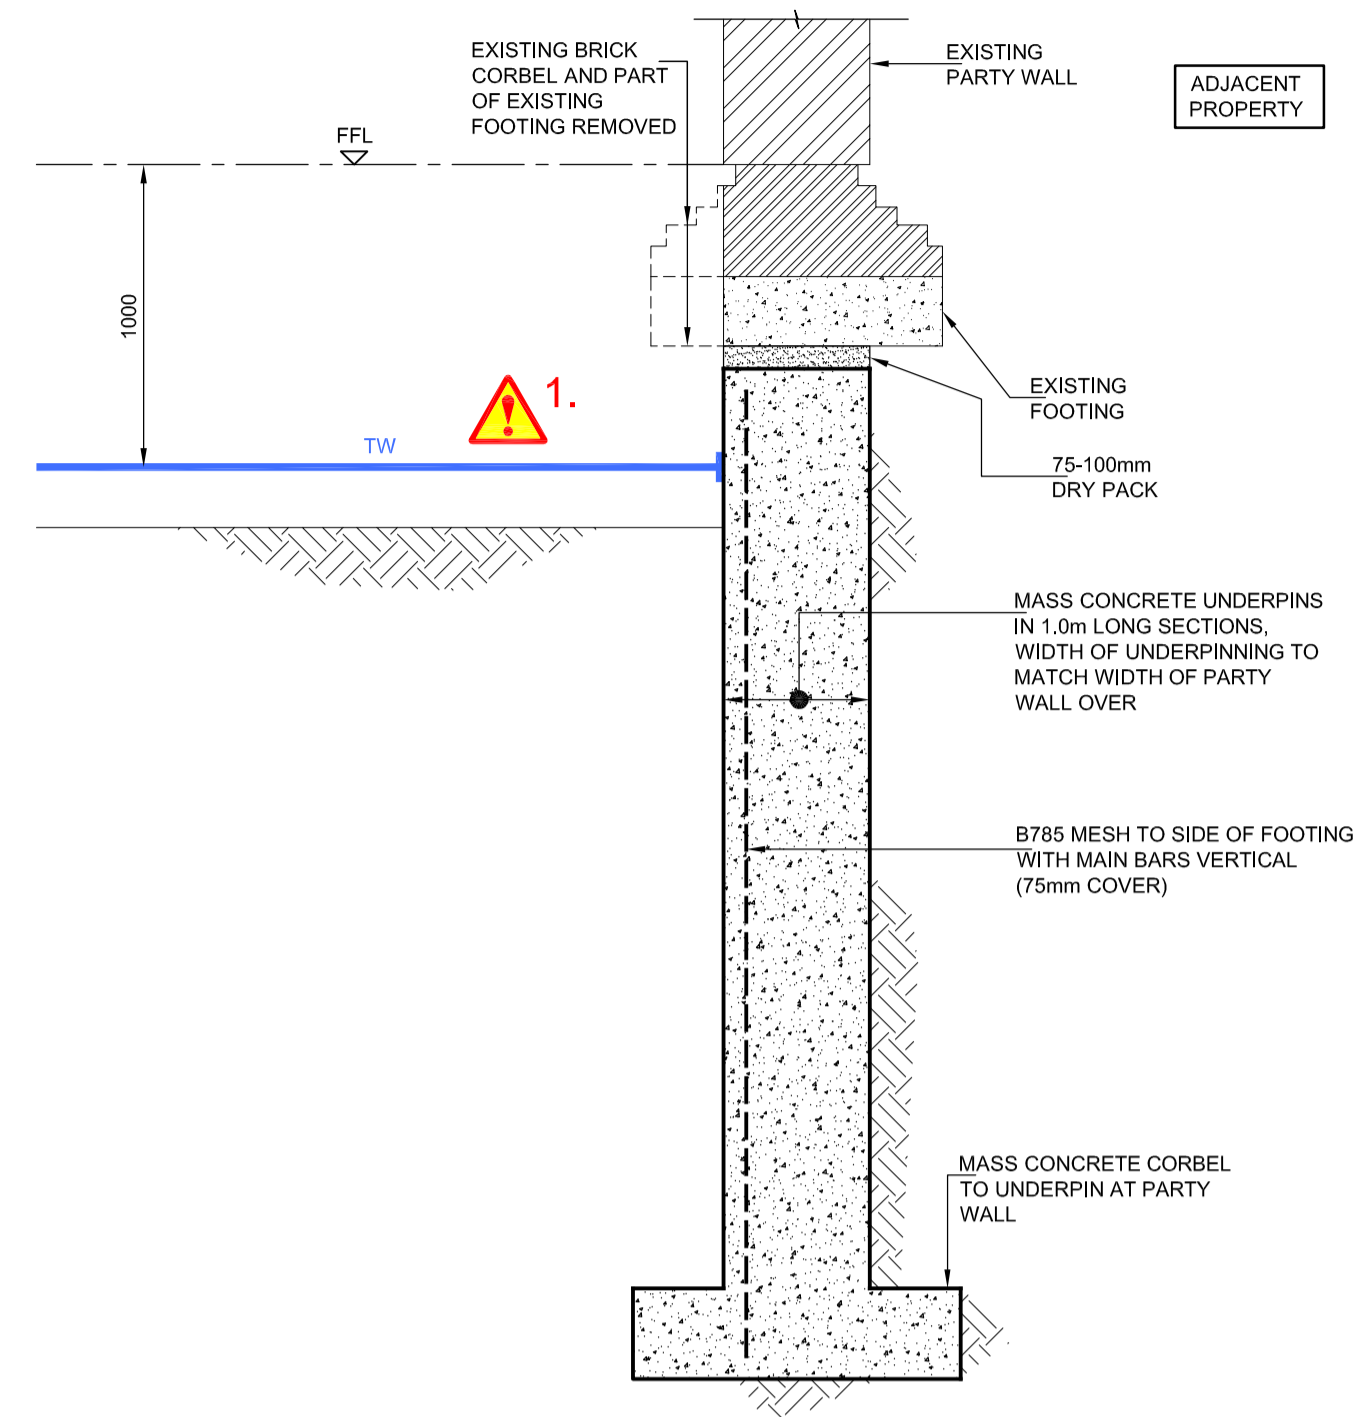


**STAGE 5A:**

EXCAVATE GROUND DOWN AS SHOWN AND INSTALL TEMP PROPPING AT 1000mm BELOW GROUND FLOOR LEVEL

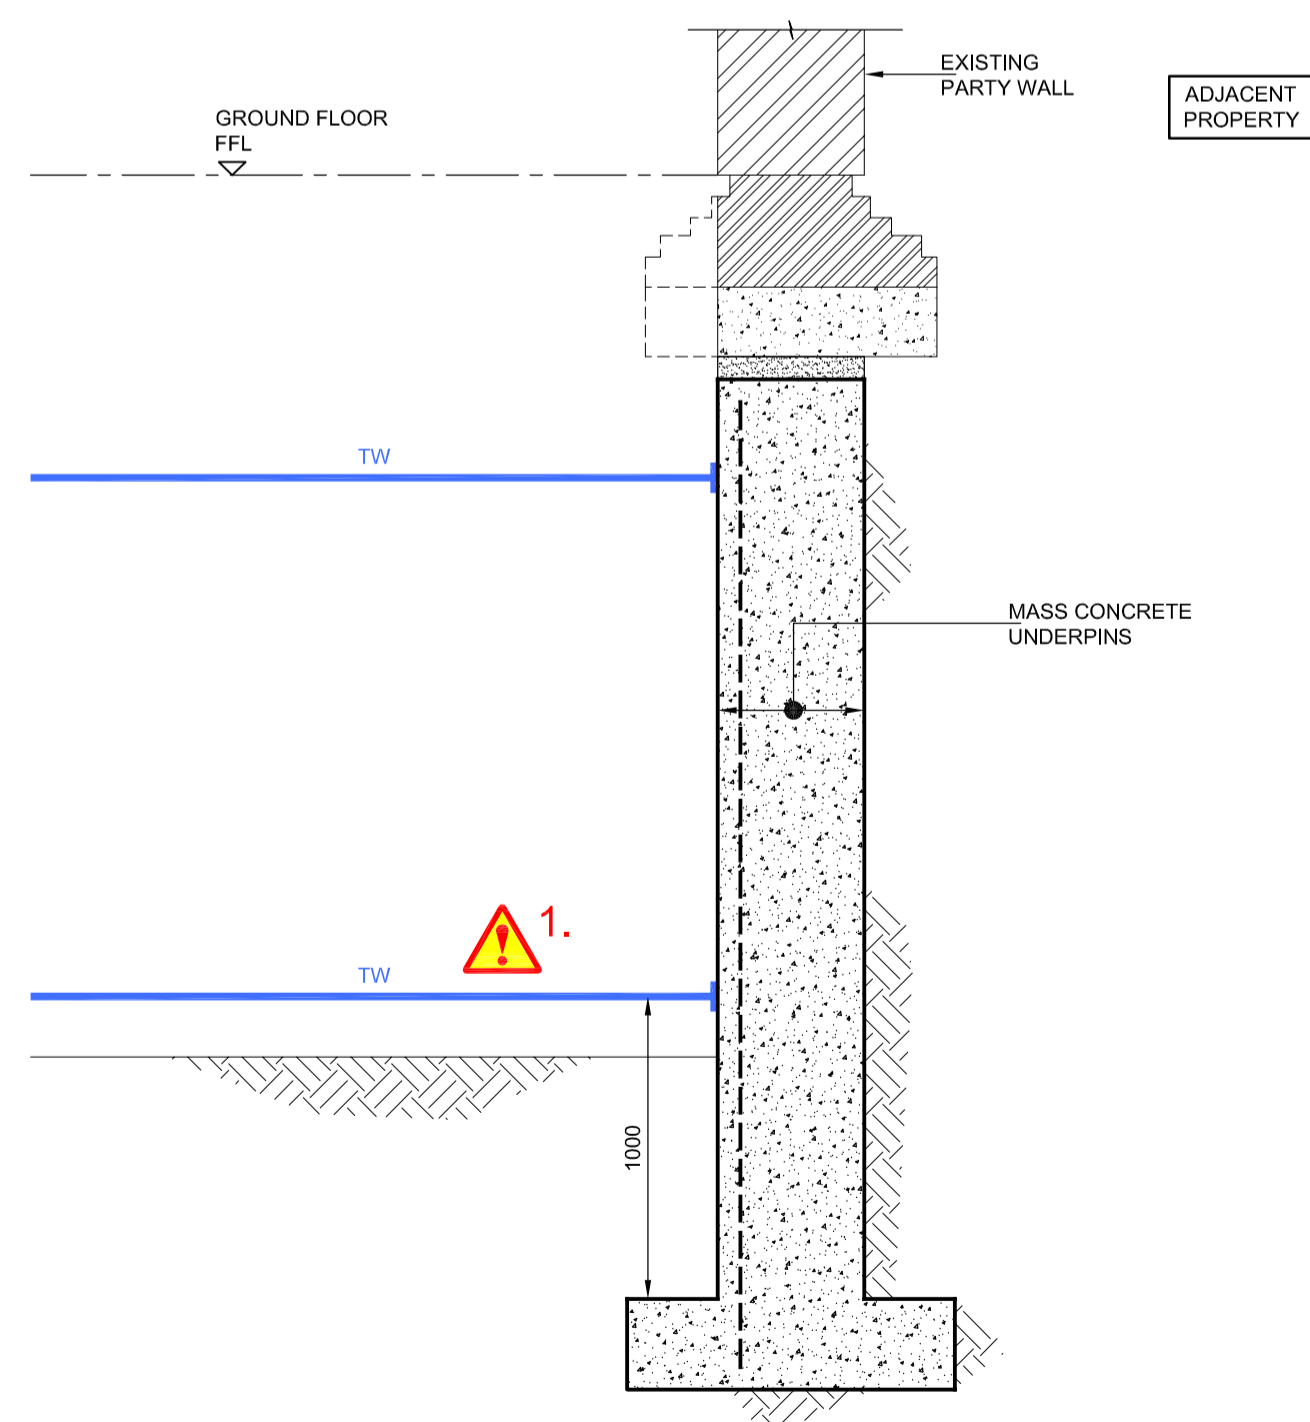

**STAGE 5B:**

EXCAVATE GROUND DOWN AS SHOWN AND INSTALL TEMP PROPPING AT 1000mm ABOVE UNDERPIN TOE

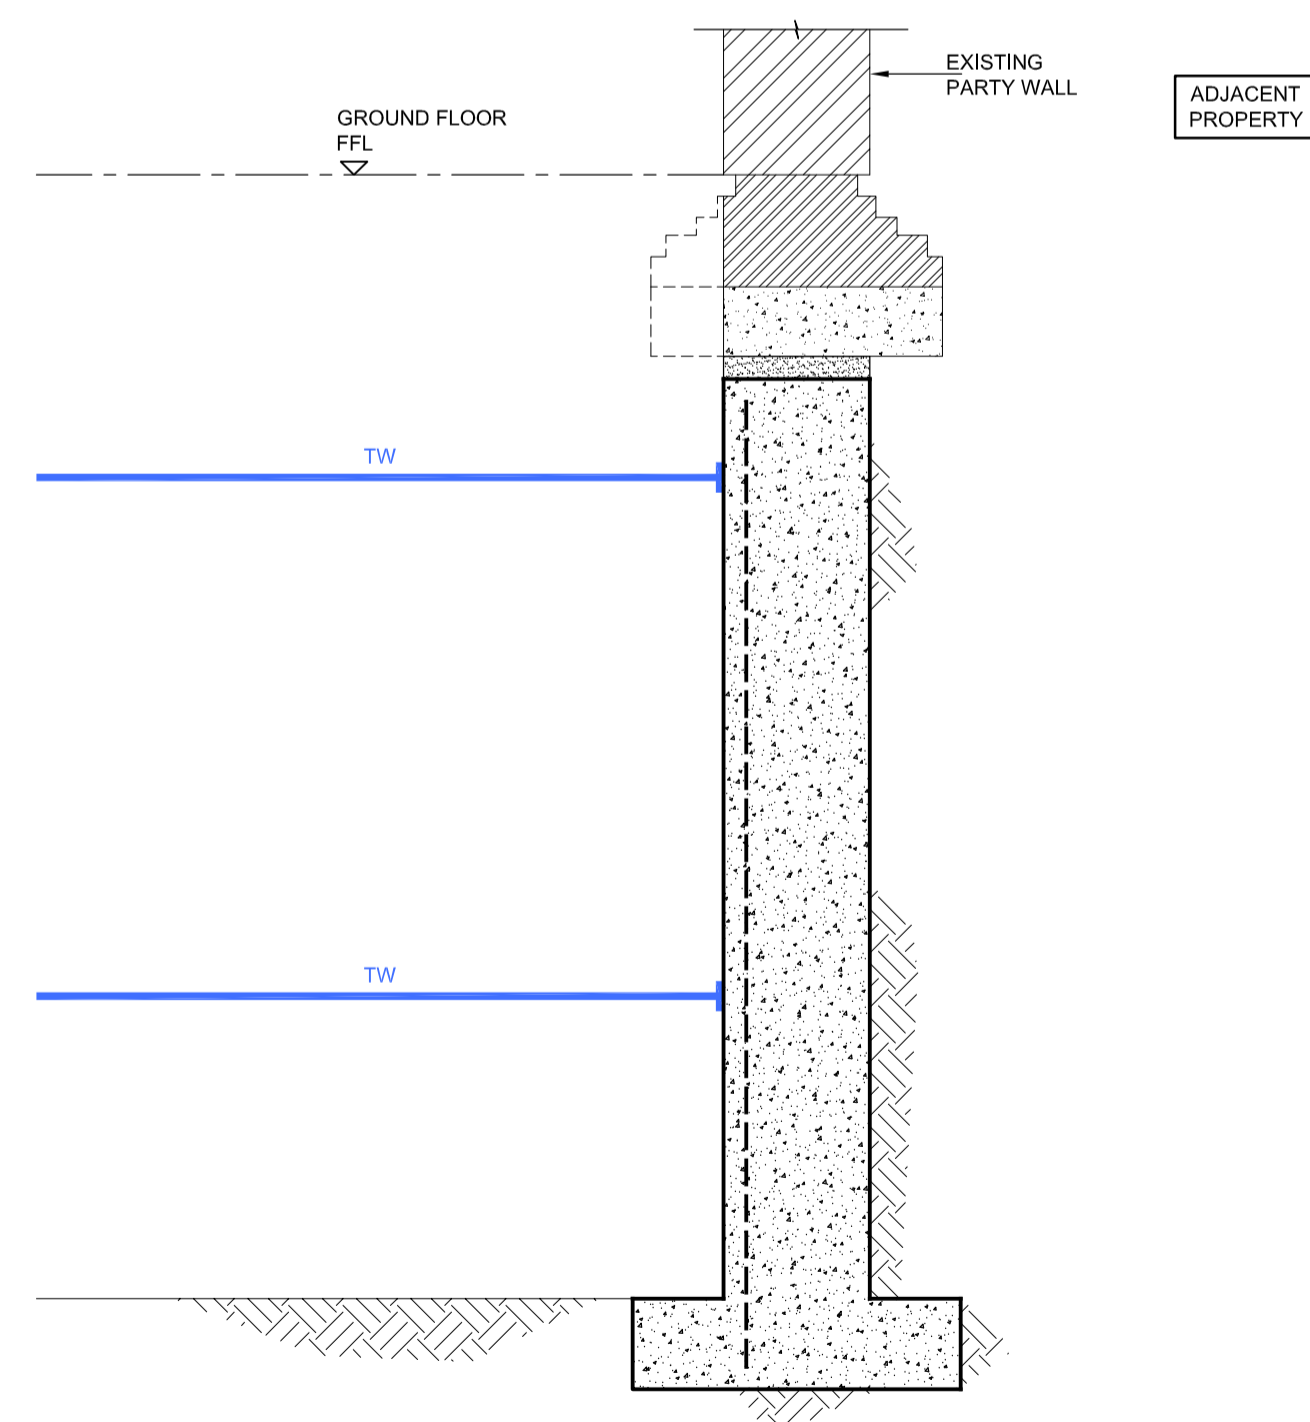

**STAGE 5C:**

EXCAVATE GROUND DOWN TO FORMATION LEVEL AND CONSTRUCT NEW REINFORCED CONCRETE BASEMENT CONSTRUCTION AS DETAILED IN STAGES 6-9

CDM REGULATIONS 2015 RESIDUAL HAZARDS	
RESIDUAL HAZARDS IDENTIFIED	
1.	TEMPORARY PROPPING - MAIN CONTRACTOR TO PROVIDE METHOD STATEMENT.

THIS REGISTER IS A NON-EXHAUSTIVE LIST OF RESIDUAL HAZARDS RELATING TO THE WORKS SHOWN ON THIS DRAWING THAT HAVE BEEN IDENTIFIED DURING THE DESIGN STAGE.

Mark	Date	By	Chkd.	Revision notes
-	16/11/15	PO	HJ	PRELIMINARY ISSUE

**abstruct**  
consulting engineers  
Lime Tree House, 15 Lime Tree Walk, Sevenoaks TN13 1YH  
LONDON + SEVENOAKS Tel: 03330 113 401 info@abstruct-llp.com

Job Title  
**4No NEW RESIDENTIAL UNITS  
465-467 FINCHLEY ROAD  
NW3 6HS**

Drawing Title  
**BASEMENT CONSTRUCTION  
SEQUENCE:  
STAGE 2 & 5 SECTIONS**

Client  
**A.GOVANI**

Scale at A1:  
**1:25**

Drawn:  
PO

Checked:  
HJ

Date:  
November 2015

Date:  
16/11/2015

Drawing No.:  
**AB1115\_SEQ\_0005**

Revision:  
-

**PRELIMINARY ISSUE**