

Supplementary Arboricultural Report

Impact Assessment & Method Statement



For planning purposes at

**Grafton Mews
Off Grafton Terrace
London
NW3**



**Dated
5th June 2014**






CROWN
Consultants

Tree consultants throughout England and Wales






Dashboard

This report presents the results of a tree survey to British Standard 5837 (2012). It is designed to accompany a planning application for development proposals at Grafton Mews, Off Grafton Terrace. Guidance is given within the Appendices to help the reader interpret our findings. The Tree Data Schedule and all drawings are included in Appendix 6.

This section of the report provides an overview and summary of our findings. The report author will gladly assist with any queries that may arise. His contact details can be found within the footer sections throughout the report.

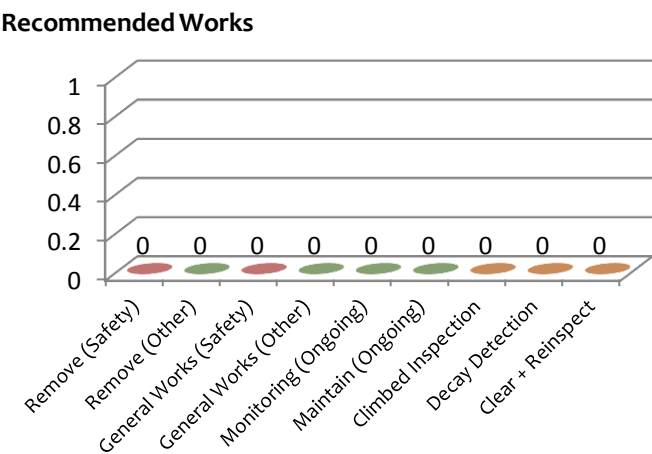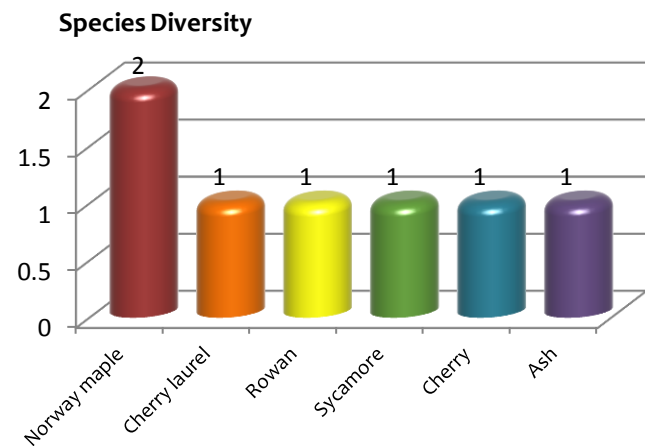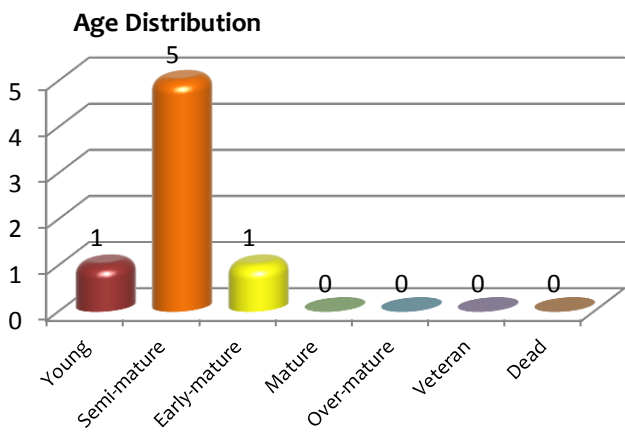

Trees surveyed as individual specimens:	7
groups:	0
hedges:	0
shrubs:	0
woodlands:	0

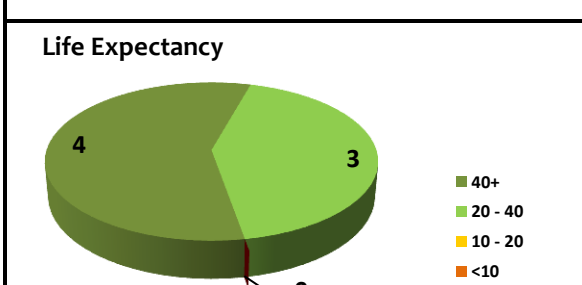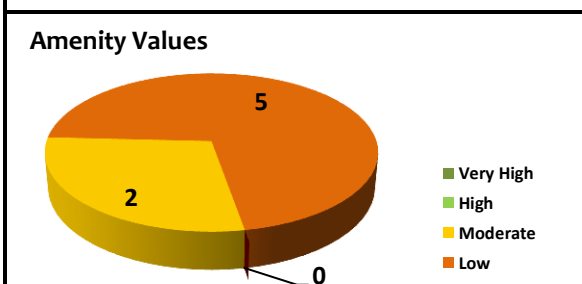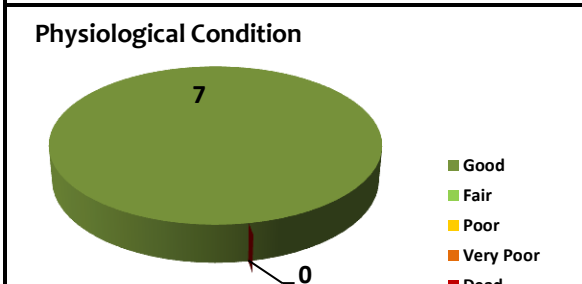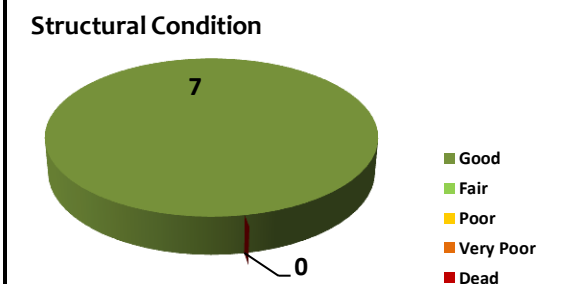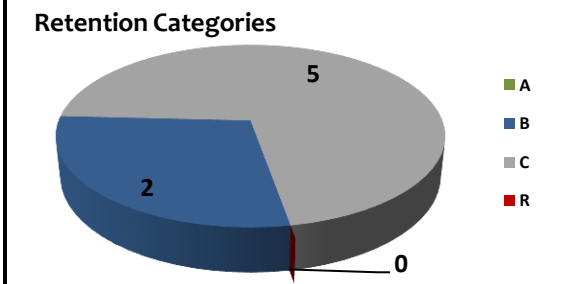


Executive Summary.

- This report is intended to enable designers to take into account the constraints that existing trees pose upon the site. An Arboricultural Impact Assessment and Method Statement detailing tree protection measures have also been included.
- The proposed new building shall be located away from all tree canopies and Root Protection Areas. Therefore it shall have no detrimental impact on any trees.
- Where it is proposed to resurface the asphalt around T108 and T109, care should be taken to ensure no damage occurs to roots.
- In order to ensure no damage occurs, the existing surface should be carefully removed in the presence of an appointed arborist. No excavation should occur below the existing surface and its sub-base. All roots over 25m diameter should be left intact. The new surface should be laid carefully, avoiding soil compaction and root disturbance.
- A porous surface is proposed (block paving). This will improve the rooting conditions for these trees. Consequently the proposal shall have a long term arboricultural benefit.
- It is proposed to install plywood boxing around the tree stems to ensure they are not inadvertently damaged by machinery during the resurfacing operation.
- The square planted areas in which the trees are growing should ideally be left intact. If they require replacing, this should be done using hand tools and without any excavation beyond existing foundations.
- The roots of the small trees T105, T106, T107 and T110 will be confined within the adjacent gardens due to the foundations of the large boundary wall. Hence the resurfacing operation shall have no impact on them.
- Suitable mitigation and protection measures are specified in Section 6.

Contact Details

Local Authority:	London Borough of Camden	Tel.	020 7974 4444
Report Author:	Ivan Button (Crown Consultants Ltd).	Tel.	01422 316660

Site Location: Grafton Mews

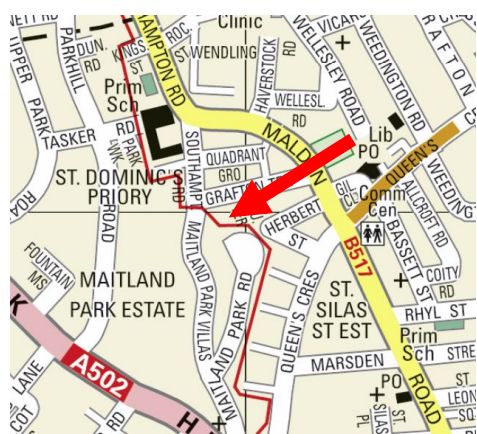

Extent of the survey



Contents

1.	Introduction	3
1.1.	Instruction	3
1.2.	References (Main Report)	3
1.3.	Scope and Purpose of the Report	3
1.4.	Drawings	3
2.	Site Overview	4
2.1.	Brief Description (Existing Layout)	4
2.2.	Proposals Overview	4
3.	Tree Survey and Data Schedule	5
3.1.	Survey Details	5
3.2.	Data Schedule	5
3.3.	RPA calculation - Single Stems & Multiple Stems	5
4.	Vegetation Overview (independent of proposals)	6
4.1.	Preliminary Management Recommendations	6
4.2.	Future Inspections	6
5.	Arboricultural Impact Assessment	7
6.	Method Statement	8
	Section A: Introduction and Overview	8
6.1.	Definition of Terms	8
6.2.	Tree Protection Barriers - Overview	8
6.3.	Planning Status	9
6.4.	Overview of Protection Measures	9
	Section B: Restrictions on Activities – Specific Zones	10
6.5.	Construction Exclusion Zones	10
6.6.	Restricted Activity Zone C	10
	Section C: Restrictions on Activities – Throughout the Site	11
6.7.	Installation of Building Foundations	11
6.8.	Canopy Protection	11
6.9.	Underground Services	11
6.10.	Use of Heavy Plant	11
6.11.	Removal of Tree Protection Barriers	11
7.	Site Inspection	12
7.1.	Inspection Schedule	12
7.2.	The Appointed Arborist	12
8.	Tree Protection Barriers	13
	Detailed Specification	13
8.2.	Stem Protection – Timber Boxing	13
8.3.	Notices	13
9.	New Surfaces	14
	Detailed Specification	14
9.1.	Resurfacing Close to T108 and T109	14
10.	Photographs	15
11.	Signature	16
	Appendix 1: BS 5837: 2012 – Guidance Notes	17
	Appendix 2: Explanation of Tree Data & Glossary	19
	Appendix 3: Survey Methodology	23
	Appendix 4: Author's Qualifications	23
	Appendix 5: Further Information	24
	Appendix 6: Tree Data Schedule and Site Plan(s)	25



1. Introduction

1.1. Instruction

- 1.1.1. We are instructed by Tom French of EC Harris LLP to undertake an Arboricultural Survey at Grafton Mews (off Grafton Terrace) and produce our findings in a report. We are also instructed to assess the likely impact of development proposals and produce a Method Statement detailing how trees shall be protected from the proposed construction activity.

1.2. References (Main Report)

- 1.2.1. This report should be read in conjunction with our report dated 4th June 2014 which surveyed trees T1 to T103 within the Maitland Park site. Trees T1 to T103 were surveyed in October 2013. Since undertaking that survey it became apparent that additional trees needed to be surveyed. The additional trees are numbered T104 to T110 and are the subject of this supplementary report.

1.3. Scope and Purpose of the Report

- 1.3.1. This report is designed to accompany a planning application for development proposals at the above site. Its purpose is to assist and inform the planning process. It is produced according to the guidance and recommendations within BS 5837: 2012 - *Trees in Relation to Design, Demolition and Construction*. It is supplementary to our main report dated 4th June 2014 ref CCL 0956.

1.4. Drawings

- 1.4.1. We have been supplied with a measured plan of the site with tree positions already plotted. Where applicable, additional trees have been plotted according to measurements taken on site.
- 1.4.2. The *Tree Constraints Plan* shows the existing layout. For each tree the stem location is indicated and scaled according to its diameter, the canopy is indicated according to measurements taken along the four cardinal points of the compass. Root protection areas (RPAs) are indicated which are calculated according to the guidelines within BS 5837 (2012).
- 1.4.3. Where appropriate, the shapes of the RPAs have been amended to reflect actual site conditions or where trees have been heavily pruned. The 'original' RPAs are indicated as a dashed line whereas the amended RPAs are indicated as a solid line.
- 1.4.4. The *Impact Assessment Plan* indicates the tree constraints with the proposals overlaid. Where applicable, this plan shows where works are proposed in Root Protection Areas and which trees are to be pruned or removed. This plan accompanies the Impact Assessment which is to be found in Section [5](#).
- 1.4.5. The *Tree Protection Plan* shows the protection measures that are to be installed during the construction phase. This plan accompanies the Method Statement which is to be found in Section [6](#).



2. Site Overview

2.1. Brief Description (Existing Layout)

2.1.1. The site co-ordinates are 51.549238° -0.155510° and the altitude is 50m above sea level. (co-ordinates may be pasted or typed into the following site: <http://maps.google.co.uk/> where maps, satellite imagery and street views may be accessed).

2.1.2. Our survey covered the area indicated in Figure 1.



Figure 1 Extent of the survey (image is not current).

2.1.3. The site comprises a short street off Grafton Terrace.

2.1.4. Towards the southern end of the street grow an 8m tall cherry and an 11m tall Norway maple (T108 and T109). These are growing in two square planting pits surrounded by asphalt.

2.1.5. Four other small trees are growing in adjacent gardens and overhang the 2m boundary wall (T105, T106, T107 and T110). These are a cherry laurel, a rowan, a sycamore and an ash.

2.1.6. A lime and a Norway Maple (street trees) are growing on Grafton Terrace close to the junction at the northern end of the street.

2.1.7. The Tree Constraints Plan and Tree Data Schedule should be referred to for descriptions and locations of all trees.

2.1.8. Photographs of the site are included in Section [10](#).

2.2. Proposals Overview

2.2.1. It is proposed to construct a new building and to resurface much of the street.



3. Tree Survey and Data Schedule

This page is largely generic. Tree officers and other persons familiar with arboricultural reports may go straight to the following section and refer to the tree data in Appendix 6.

3.1. Survey Details

- 3.1.1. A ground level survey was undertaken on the 10th May 2014. The survey was conducted by Ivan Button. No climbed inspections or specialist decay detection were undertaken. Only trees with a stem diameter over 75mm were included, which lie within the site boundary or relatively close to it.
- 3.1.2. Where applicable, trees with significant defects have been highlighted and appropriate remedial works have been recommended. However, this report should not be seen as a substitute for a full *Safety Survey* or *Management Plan* which are specifically designed to minimise risk and liability associated with responsibility for trees.
- 3.1.3. Wherever possible, dimensions are obtained using diameter tapes, logger's tapes, distometers and clinometers. Where obstacles prevent accurate measurement, dimensions are estimated. Trees on privately owned third party are surveyed from the best available vantage point and observations relating to the condition of these trees should be treated accordingly. All height measurements should be regarded as approximate.

3.2. Data Schedule

- 3.2.1. The findings of the survey are presented in The Tree Data Schedule which is provided as a separate document as well as being appended to the end of this document within Appendix 6.
- 3.2.2. The Schedule includes scaled tree images based on measurements recorded for stem diameter, crown spread, crown height and overall height. Their purpose is to indicate, at a glance, the relative dimensions of each tree.
- 3.2.3. A definition of the Retention Categories can be found in Appendix 1. All other terms used within the Tree Data Schedule are defined and explained in Appendix 3.

3.3. RPA calculation - Single Stems & Multiple Stems

- 3.3.1. For single stemmed trees, the RPA is calculated according to the following formula:
$$\text{RPA radius} = 12 \times \text{stem diameter (measured at 1.5m above ground level)}$$
- 3.3.2. Where a tree has more than one stem, the equivalent-single-stem diameter is usually recorded. This is calculated by adding the squares of the stems and then finding the square root of this total. The radius of the Root Protection Area is then calculated by multiplying the equivalent-stem-diameter by 12.
- 3.3.3. Occasionally this method is not appropriate (e.g. for coppiced specimens where there are numerous stems). In such cases the diameter at ground level may be recorded or a stem diameter which would provide a suitable Root Protection Area calculation. The form of the tree is recorded in the notes section.



4. Vegetation Overview (independent of proposals)

This section summarises all the recommendations within the Tree Data Schedule regardless of whether trees are to be retained, felled or pruned to facilitate the proposed development. It does not specify works that may be required to facilitate the development proposals. The protection status of the trees is also reported in this section.

4.1. Preliminary Management Recommendations

- 4.1.1. The trees were all deemed to be in an acceptable condition and no significant defects were observed. Consequently, no remedial works have been recommended.

4.2. Future Inspections

- 4.2.1. The table below suggests a schedule for completing the works recommended in the Tree Data Schedule based on the perceived risk:

Inspection Frequency (years)	Tree Number
0.5	None
1	None
1.5	None
3	T104, T105, T106, T107, T108, T109, T110

- 4.2.2. The trees should be inspected sooner if there is a noticeable decline in their condition, or following extreme weather events.



5. Arboricultural Impact Assessment

- 5.1.1. The proposed new building shall be located away from all tree canopies and Root Protection Areas. Therefore it shall have no detrimental impact on any trees.
- 5.1.2. Where it is proposed to resurface the asphalt around T108 and T109, care should be taken to ensure no damage occurs to roots.
- 5.1.3. In order to ensure no damage occurs, the existing surface should be carefully removed in the presence of an appointed arborist. No excavation should occur below the existing surface and its sub-base. All roots over 25mm diameter should be left intact. The new surface should be laid carefully, avoiding soil compaction and root disturbance.
- 5.1.4. A porous surface is proposed (block paving). This will improve the rooting conditions for these trees. Consequently the proposal shall have a long term arboricultural benefit.
- 5.1.5. It is proposed to install plywood boxing around the tree stems to ensure they are not inadvertently damaged by machinery during the resurfacing operation.
- 5.1.6. The square planted areas in which the trees are growing should ideally be left intact. If they require replacing, this should be done using hand tools and without any excavation beyond existing foundations.
- 5.1.7. The roots of the small trees T105, T106, T107 and T110 will be confined within the adjacent gardens due to the foundations of the large boundary wall. Hence the resurfacing operation shall have no impact on them.
- 5.1.8. Suitable mitigation and protection measures are specified in Section 6.



6. Method Statement

Section A: Introduction and Overview

6.1. Definition of Terms

- 6.1.1. Some terms used within the Arboricultural Method Statement have very specific meanings. These are defined below:
- 6.1.2. **Root Protection Area (RPA).** This is a theoretical area of ground around a tree where the roots are likely to proliferate. Ground disturbance in this area should be minimised in order to avoid significant impact on tree health. RPAs are indicated on all plans accompanying this report as a pink line.
- 6.1.3. **Construction Exclusion Zone (CEZ).** These zones are created to protect roots and canopies from inadvertent damage by construction activity – see Section 6.5. -*Construction Exclusion Zones*. They are usually fenced off by protective barriers throughout the entire construction phase. No works are permitted in these zones other than minor landscaping works which do not require a change in ground level. Where practicable the entire *Root Protection Area* and the area beneath the tree canopy shall be treated as a *Construction Exclusion Zone*. The only *Construction Exclusion Zones* in this part of the site are the square planting pits in which T108 and T109 are growing.
- 6.1.4. **Restricted Activity Zone (RAZ).** It is not always possible to create a *Construction Exclusion Zone* over the entire RPA. This is because access may be required or some works may be proposed within the RPA. In such circumstances a *Restricted Activity Zone* is created where limitations are placed on construction activity. Ground protection measures may be specified or the *Restricted Activity Zone* may be fenced off throughout part of the construction phase. See the legend on the Tree Protection Plan to identify these zones.

6.2. Tree Protection Barriers - Overview

- 6.2.1. The Tree Protection Plan indicates the location of all proposed tree protection barriers according to the following legend and overview:

Symbol on Tree Protection Plan	Barrier type See Section 8	Location
	In-Ground System or Back-Stay System	N/A
	Back-Stay System	N/A
	Barrier Mesh System	N/A
	Plywood Boxing	Around T108 and T109
	Cloth and Wire Wrap	N/A

- 6.2.2. The barriers shall be installed prior to the commencement of any works in the vicinity of T108 and T109 (including surface removal or storage of materials).



6.3. Planning Status

- 6.3.1. Tree protection measures specified within this report should be agreed with the local authority so that they may be conditioned upon planning consent.
- 6.3.2. The site manager must be familiar with all aspects of this Method Statement and should liaise with the author of this report for clarification, or regarding any unforeseen issues where trees may be impacted upon.

6.4. Overview of Protection Measures

- 6.4.1. Below is a list of potential arboricultural impacts and a summary of the proposed protection measures:

Reference	Comments	Potential Impact	Protection measures
T108, T109	Resurfacing proposed over RPA.	Root severance. Soil compaction. Reduced water and oxygen uptake.	No excavation beyond existing surface and sub-base. Tree officer or an appointed arborist invited to oversee. See Section 6.6 for all restrictions that apply.

- 6.4.2. The above measures are described in more detail throughout the remainder of this section.



Section B: Restrictions on Activities – Specific Zones

6.5. Construction Exclusion Zones

- 6.5.1. No works or ground disturbance whatsoever shall occur within the.
- 6.5.2. Within square planted areas around T108 and T109 the following restrictions shall apply:
- Plywood boxing shall be erected and maintained throughout the entire project as indicated on the Tree Protection Plan and specified in Section [8](#) -Tree Protection Barriers.
 - No construction activity whatsoever shall occur.
 - No tree works shall be undertaken.
 - No alterations of ground levels or conditions.
 - No chemicals or cement washings permitted.
 - No excavation whatsoever.
 - No temporary structures.
 - No spoil shall be stored.
 - No fires shall be permitted.
 - All hazardous materials (including non-essential cement products) shall be forbidden.
- 6.5.3. If the edges of the planters require replacing, this shall be done using hand tools and without excavating beneath the existing foundations. All roots in excess of 25mm shall be kept intact.

6.6. Restricted Activity Zone C

- 6.6.1. Within this zone (indicated on the Tree Protection Plan) it is proposed to replace the existing surface. The following restrictions shall apply:
- No other building works shall be permitted.
 - Further detailed restrictions are specified in Section [9.1](#).
 - No vehicle or plant machinery shall drive within this Zone during the resurfacing operation.
 - No fires shall be permitted.
 - All hazardous materials (including non-essential cement products) shall be forbidden.
 - No machinery in excess of 4m tall shall pass through this zone.



Section C: Restrictions on Activities – Throughout the Site

6.7. Installation of Building Foundations

- 6.7.1. All building foundations are to be excavated outside of Root Protection Areas so their method of installation is of no arboricultural concern.

6.8. Canopy Protection

- 6.8.1. In order to protect tree canopies the following restrictions shall apply throughout the site:
- No machinery in excess of 2m shall pass beneath the canopy of any tree without being carefully marshalled in order to ensure that no branches are damaged.
 - If materials require installation or delivery beneath tree canopies, this shall be done without the use of overhead cranes.
 - If materials are to be installed or delivered close to tree canopies (but not beneath them) and a crane is required, they shall be carefully marshalled in order to ensure that branches are not accidentally damaged.

6.9. Underground Services

- 6.9.1. No underground services shall pass through any part of the *Construction Exclusion Zones* or *Restricted Activity Zones* unless done so in a manner detailed in a specific Method Statement and approved by the local authority.

6.10. Use of Heavy Plant

- 6.10.1. All machinery operatives are to be made aware of any *Construction Exclusion Zones* and *Restricted Activity Zones* that apply to this site (see the Tree Protection Plan and Section [6.5](#) onwards).
- 6.10.2. All machinery operatives are to respect these zones and ensure that no damage occurs to trees due to the careless use of machinery.

6.11. Removal of Tree Protection Barriers

- 6.11.1. This will be done after all major construction work is complete. Vehicular access will not be permitted within the *Construction Exclusion Zones*.
- 6.11.2. The local authority tree officer shall be made aware that the fencing is to be removed.



7. Site Inspection

7.1. Inspection Schedule

- 7.1.1. In order to ensure that the trees are adequately protected it shall be necessary to periodically monitor the works. This will be done by the local authority tree officer or an appointed arborist (see Section 7.2 below) who will provide the tree officer with a copy of inspection details.
- 7.1.2. The following inspection schedule is suggested though the local authority may specify additional supervision where deemed necessary.

Inspection	Attendees	Comments
Pre- Start To occur prior to any works taking place on the site.	N/A.	Site manager to study this Method Statement & contact the appointed arborist to agree all protection measures.
Pre-Construction After tree works completed & tree protection barriers / ground protection measures installed. Prior to any other activity, inc. demolition & soil stripping.	Photographs of tree protection measures to be sent to the local authority tree officer for approval.	Tree protection fencing locations & specification checked. Additional ground protection measures checked. Further protection measures / restrictions agreed.
Removal of surface in Restricted Zone C.	Site manager, appointed arborist and/or local authority tree officer.	Attendance required from commencement.
Installation of surface in Restricted Zone.	Site manager, appointed arborist and/or local authority tree officer.	Attendance required at commencement.

7.2. The Appointed Arborist

- 7.2.1. The appointed arborist must be acceptable to the local authority. He / she must have a good understanding of the project requirements and be suitably qualified to understand the hazards associated with development near to trees.
- 7.2.2. The appointed arborist should work closely with the site manager and shall have the authority to insist upon work stoppage until resolution of any major issues arising which could be detrimental to the health of protected or important trees.
- 7.2.3. The appointed arborist must keep the local authority updated at each of the stages within the inspection schedule and will advise on any unexpected issues arising throughout the project which could impact on trees.



8. Tree Protection Barriers

Detailed Specification

- 8.1.1. The purpose of tree protection barriers is to protect the tree stems from inadvertent damage by general construction activity. Barrier systems are specified below and should be installed according to the legend on the Tree Protection Plan.

8.2. Stem Protection – Timber Boxing


- 8.2.1. Where indicated by a turquoise square on the Tree Protection Plan, it shall be necessary to install robust plywood boxing to protect a tree stem. The plywood boxing specification is indicated in the diagram opposite. It shall be affixed in place without securing it to any part of the tree. Instead, it shall be secured to the ground or to adjacent structures. It shall be made firm enough to withstand occasional knocks from construction vehicles.



8.3. Notices

- 8.3.1. Suitable weather-proof notices should be displayed to identify tree protection zones. They should state the purpose of the fencing and that it should not be moved, or traversed, other than by authorised personnel.

Tree Protection Plywood Box

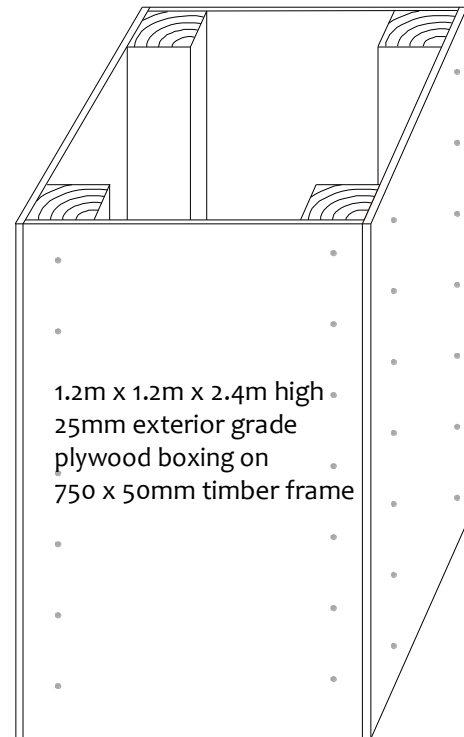



9. New Surfaces

Detailed Specification

9.1. Resurfacing Close to T108 and T109

9.1.1. Where it is proposed to resurface an existing driveway over Root Protection Areas (Restricted Zone C) the following restrictions shall apply:

- No excavation in below the existing sub-base shall occur. The existing sub-base may be retained undisturbed and incorporated into the new structure.
- Mechanical excavators may be used so long as they operate from outside Root Protection Areas and are carefully marshalled by the appointed arborist or local authority tree officer.
- No vehicles or plant machinery shall operate within the Restricted Zone.
- Any exposed roots in excess of 25mm are to be retained. Before the new surface is installed, 25mm of soil (or river sand) and a geotextile membrane shall be laid over the root. Until such times, the root shall be adequately protected from pedestrian damage using timber and sand.
- Any new sub-base shall not contain fine particles. Coarse sand or larger particles shall be acceptable. 7-14mm gravel is ideal.
- A 3 dimensional cellular confinement system may be incorporated into the sub-base and is encouraged. However, this is not considered compulsory since the resurfacing operation shall not cause a deterioration of rooting conditions beneath the existing driveway.
- No salt or lime based products are to be incorporated within the sub-base.



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for:

EC Harris LLP

Crown Ref: 09056B

Site:

Grafton Mews

Author: Ivan Button

Date:

5th June 2014

10. Photographs

Refer to the Tree Constraints Plan for photo locations

Photo 1.



Photo 2.



Photo 3.



Photo 4.



Photo 5.



Photo 6.





PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for: EC Harris LLP

Crown Ref: 09056B

Site: Grafton Mews

Author: Ivan Button

Date: 5th June 2014

11. Signature

This report represents a true and factual account of the trees and potential impact of development along with proposed protection measures at

Adjacent Maitland Park
(off Grafton Terrace)
Maitland Park Road
London
NW3 2HB

Signed

Ivan Button N.C.H. (Arb), FDS (Arb), BSc (Hons), P.G.C.E., M. Arbor. A.

on behalf of

Crown Consultants Ltd

Dated

5th June 2014





Appendix 1: BS 5837: 2012 – Guidance Notes

This Standard prescribes the principles to be applied to achieve a satisfactory juxtaposition of trees and structures. It sets out to assist those concerned with trees in relation to design, demolition and construction to form balanced judgements.

It acknowledges the positive contribution trees may offer to a site, as well as the negative aspects of retaining inappropriate trees. It addresses the negative impacts that construction activity may have upon trees and offers mitigation strategies to minimise these impacts.

The Standard suggests a three stage approach to ensure best practice is followed when developing close to trees:

A1.1 Stage 1: Survey of Existing Trees

This identifies the existing trees on and adjacent to the site. Data is recorded for each tree and is presented in a Tree Data Schedule. Each tree is allocated a **Retention Category** according to its size, amenity value, condition and safe useful life expectancy. The categories are allocated independently of development proposals. Our interpretation of the Retention Categories is explained below:

A1.1.1 Retention Categories

A Category: Trees of high quality and amenity value. Usually, mature trees with a significant life expectancy which would enhance any development. Retention of these trees is strongly encouraged.

B Category: Trees of moderate quality and amenity value. Usually these are maturing trees or younger trees with exceptional form. Retention of these trees is desirable though the removal of occasional specimens may be acceptable.

C Category: Trees of low quality or small specimens with a relatively low amenity value. These trees are not considered to be a material planning constraint and their removal will generally be seen as acceptable in order to facilitate development.

U Category: Trees of such low quality that their removal is recommended regardless of development proposals.

A1.1.2 Occasionally trees are borderline and do not fall neatly into one of the categories A, B or C. In such cases we apply a superscript (+/-) such that:

C⁺ Indicates borderline C/B, though Category C is deemed to be most appropriate.

B⁻ Indicates borderline C/B, though Category B is deemed to be most appropriate.

A1.1.3 The British Standard suggests that each of the A, B and C categories may be further subdivided (A1, A2, A3, B1, B2, B3 etc) such that subcategory 1 denotes mainly arboricultural values, subcategory 2 denotes mainly landscape values and subcategory 3 denotes mainly cultural values (including conservation). Multiple subcategories may be used.

Our experience suggests that these subdivisions lack clarity and can be confusing. Within this report subcategories are **not** denoted. Where appropriate, the use of phrases such as 'Part of a formal group', or 'Has a high ecological value', or 'Offers good screening to the site' are incorporated into the observation section of the Tree Data Schedule. We believe this conveys all relevant landscape and cultural information without any confusion.

A1.1.4 **Tree Constraints Plan (TCP).** This indicates the position, crown spread, Retention Category and Root Protection Area of each tree. It is used to inform where development may proceed without causing damage to trees.



A1.1.5 Root Protection Area (RPA). This is the area around each tree likely to contain the majority of roots. It should ideally remain undisturbed to avoid a detrimental impact on tree health. For single stemmed trees It is calculated according to the formula “radius of RPA” = “12 x stem diameter”. For multiple-stemmed trees a more complex formula is used which may occasionally produce an RPA which seems inappropriately large relative to the trees canopy. This shape can then be modified to take into account site factors which influence rooting activity, e.g. foundations, soil type or impermeable surfaces. Where development works are proposed within the RPA they should be undertaken in a sympathetic manner to minimise root disturbance.

A1.1.5 Shade Constraints. The previous Standard (BS 5837 2005) suggested that shade constraints should be indicated on the TCP. This are denoted as a circle-segment drawn northwest to due east with a radius equal to the height of the tree. These do not represent the actual shade pattern which varies through the seasons. Rather, they indicate the area most shaded by the tree throughout the course of the year. Ideally habitable room windows should be located outside of these shade constraints. Where we consider it appropriate, we will include shade constraints information on our Impact Assessment Plan or Proposed Layout Plan.

A1.2 Stage 2: Arboricultural Impact Assessment

After the initial survey and the production of the Tree Constraints Plan, arborists and designers are encouraged to work together to establish a design proposal with minimal impact on the high quality trees. An assessment should be made of all possible impacts including the impact that the trees may have upon the proposal. The arborist may recommend mitigation strategies to minimise these impacts and help achieve a more harmonious juxtaposition between buildings and trees.

A1.3 Stage 3: Arboricultural Method Statement

This type of report specifies the measures necessary to protect trees against damage from construction activity. The Method Statement should be written in a manner that it may be conditioned and enforced by the local authority upon granting of planning permission. The site manager should be familiar with all aspects of the Method Statement and should ensure that all persons working on the site are aware of those aspects which appertain to their work. This includes service installation engineers and operators of plant machinery.



Appendix 2: Explanation of Tree Data & Glossary

This section explains the terms used in the **Tree Data Schedule** (see Section 3 and Appendix 6).

A4.1 General Observations

A4.1.1	Numbering System:	Each item of vegetation has its own unique number prefixed by a letter such that T1=Tree 1, G2=Group 2, H3=Hedge 3 and W4=Woodland 4, S5=Shrub 5.
A4.1.2	Age Categories:	
	Young	Usually less than 10 years old.
	Semi-Mature	Significant future growth to be expected, both in height and crown spread (typically below 30% of life expectancy).
	Early-Mature	Full height almost attained. Significant growth may be expected in terms of crown spread (typically 30-60% of life expectancy).
	Mature	Full height attained. Crown spread will increase but growth increments will be slight (typically 60% or more of life expectancy).
	Veteran	A level of maturity whereby significant management may be required in order to keep the tree in a safe condition.
	Over Mature	As for veteran except management is not considered worthwhile.
A4.1.3	Species:	Common names and Latin names are given.
A4.1.4	Height:	Measured from ground level to the top of the crown.
A4.1.5	Stem Diameter:	Taken at 1.5m above ground level where possible. On multi-stemmed trees this measurement may be taken at ground level, though usually an indication of the number of stems and average diameter is given, e.g. 3 x 30cm.
A4.1.6	Crown Height:	Measured from ground level to the height at which the main crown begins. Where the crown is unbalanced it is measured on the side deemed to be most relevant. This is usually the side facing the area of anticipated development.
A4.1.7	Tree Diagram:	This scaled drawing is computer generated based on measurements taken for stem diameter, crown height and spread, and overall height. It is designed to help the reader rapidly assess the data. It is not an accurate representation of the form of the tree.
A4.1.8	Crown Spread:	Measured N, E, S & W, taken from the centre of the stem and usually rounded up to the nearest metre.
A4.1.9	Observations:	If a tree's position is considered to be relevant it will be commented upon (e.g. overhanging a children's play area). Tree form and pruning history are also recorded along with an account of any significant defects. Defects and descriptive terms are dealt with in more detail at the end of this section.
A4.1.10	Recommendations:	Usually based on any defects observed and intended to ensure that the tree is in an acceptable condition.
A4.1.11	Priority Scale:	Depending upon the threat posed by the tree, and the likelihood of failure, recommendations should be carried out according to the following priority scale:
	Urgent	To be carried out as soon as possible.
	Very High	To be carried out within 1 month.
	High	To be carried out within 3 months.
	Moderate	To be carried out within 1 year.
	Low	To be carried out within 3 years.
A4.1.12	Inspection Frequency:	An interval of 6 months, 1 year, 1.5 years or 3 years is allocated before the next inspection is due. Wherever practical, consideration should be given to seasonal changes so that deciduous trees are not always surveyed in winter when they have no leaves, or in summer when leaves may obscure branches within the upper crown.
A4.1.13	Vigour:	An indication of growth rate and the tree's ability to cope with stresses:
	High	Having above average vigour.
	Moderate	Having average vigour.
	Low	Having below average vigour.
	Very Low	Tree is struggling to survive and may be dying.
A4.1.14	Physiological Condition:	
	Good	Healthy and with no symptoms of significant disease.
	Fair	Disease present or vigour is impaired.
	Poor	Significant disease present or vigour is extremely low.
	Very Poor	Tree is dying.
A4.1.15	Structural Condition:	
	Good	Having no significant structural defects.
	Fair	Some defects observed though no high priority works are required.
	Poor	Significant defects found. Tree requires monitoring or remedial works.
	Very Poor	Major defects which will usually require significant remedial works or tree removal.
A4.1.16	Amenity Value:	
	Very High	Exceptional specimen, observable by a large number of people.
	High	Attractive specimen, observable by a significant number of people.
	Moderate	One of the above factors is not applicable.
	Low	Unattractive specimen or largely hidden from view.
A4.1.17	Life Expectancy:	The estimated number of years before the tree may require removal. Classified as (<10), (10 – 20), (20 – 40), or (40+).
A4.1.18	Retention Category:	These are explained in detail in Appendix 1.

A4.2 Evaluation of Defects

Cavities, wounds, deadwood etc are all evaluated as follows:

Major	Such that structural integrity is, or will become, compromised and the tree is, or will inevitably become, hazardous.
Significant	A defect that may over time become a major defect, though not necessarily so. This will depend on the vigour of the tree and its ability to deal with decay etc.
Minor	A defect that is not likely to compromise the tree's structural integrity.



General Glossary

Adaptive growth	In tree biomechanics, the process whereby wood formation is influenced both in quantity and quality by the action of gravitational forces and mechanical stresses on the cambial zone.
Aerobic	Conditions in which oxygen is freely available, or to biomechanical processes that depend on the presence of oxygen.
Anaerobic	A condition marked by the absence of oxygen; Generally such areas are unsuitable for normal life and growth of plant tissues. These sites tend to be populated by bacteria capable of surviving low oxygen conditions often associated with Slime Flux.
Arboriculture	The culture and management of trees as groups and individuals primarily for amenity and other non-forestry purposes.
Arborist	A person possessing the technical competence through experience and related training to provide management of trees or other woody plants in a landscape setting. Generally involved with the development or management of trees for visual amenity or land management rather than the growth of trees for product or profit.
Barrier zone	A layer within an annual increment of wood which contains abnormal xylem cells, laid down by the cambium in response to wounding or other trauma.
Body language	In trees, the outward display of growth responses and or deformation in response to mechanical stress.
Bole	Or Trunk, the main stem of a tree below its first major branch.
Bracket	A type of fruiting body produced by various fungal species, plate like to hoof like in shape and often a one sided attachment to the wood or bark.
Branch bark ridge	A ridged area located at the union of a branch to a trunk or stem.
Branch Collar	Trunk tissue that forms around the base of a branch between the main stem and the branch, or between a main branch and a lateral branch. As a branch decreases in vigour or begins to die, the collar usually becomes more pronounced and completely encircles the branch.
Brown Rot	Form of decay where cellulose is degraded, while lignin is only modified.
Buttress Root	Roots that emerge from the base of the tree stem, normally large and well developed that rapidly reduce in diameter to create the Root Plate this offers structural support for the tree. Buttress roots divide rapidly forming the connection between the stem and the transport roots.
Cabling Bracing	Installing cables within the crown of a tree to prevent collapse.
Callus	Undifferentiated cells often formed at the edges of recent injuries. This tissue quickly becomes differentiated, forming cells of the type characteristic of that position on the tree (e.g. forming wood, bark, roots, etc.) see wound response tissue.
Cambium	A thin layer of actively growing and dividing cells, located between the xylem (sapwood) and bark of a plant; the part responsible for radial growth of a tree stem or branch.
Canopy	The topmost layer of twigs and foliage in a woodland, tree or group of trees.
Canker	A localised area of dead bark and cambium on a stem or branch, caused by fungal or bacterial organisms, characterised by woundwood development on the periphery. This may be annual or perennial.
Cavity	An open and exposed area of wood, where the bark is missing and internal wood has been decayed and dissolved.
Chlorotic	Also Chlorosis. A condition of the plant marked by yellowing of normally green foliage, often indicating nutrient deficiency or plant dysfunction.
Clinometer	Devices that measures vertical angles, and provides direct height measurements of objects by triangulation.
Co-dominant stems/trunk	Are forked branches or trunks of nearly the same size in diameter and lacking a normal branch union.
Compacted soils	Soils in which the air-space (oxygen space) has been reduced or eliminated, reducing water infiltration and percolation, reducing root presence and inhibiting new root development.
Compartmentalisation	The physiological process that creates the chemical and mechanical boundaries that act to limit the spread of disease and decay organisms.
Compression Failure	Localized buckling of fibres and other longitudinal elements produced by compression of wood along the grain; compression failures sometimes develop in standing trees.
Compression Strength	The ability of a material or structure to resist failure when subjected to compressive loading; measurable in trees using special drilling devices
Compression Wood	Abnormal wood formed on the lower side of branches and curved stems, with physical properties different from normal wood.
Conservation Area	In Great Britain, designated areas of architectural or historical interest, in which there are special procedures for planning applications. Additionally tree works cannot generally be undertaken without prior notification (Currently 6 weeks) to the relevant local planning authority. See also Tree Preservation Orders.
Core Sample	A sample of wood extracted from a trunk or branch, using an increment borer tool. The resulting core can be analysed for characteristics of growth, wood strength, structure, decay, and for species identification.
Crotch	The union of two or more branches; the auxiliary zone between branches.
Crown	The upper canopy of a tree, including the upper trunk, scaffold branches, secondary branches, stems and leaves.
Crown lifting / raising	Crown Lift The removal of the lowest branches, usually to a given height. It allows more residual light and greater clearance underneath for vehicles etc.
Crown reduction	The reduction of a tree's height or spread while preserving its natural shape.
Crown thinning	The removal of some of the density of a tree's crown, usually 5-25% allowing more light through its canopy and reducing wind resistance.
Deadwood (noun)	Deadwood is often present within the crown or on the stems of trees. It may be an indication of ill health, however, it may also indicate natural growth processes. If a target is present beneath the tree, deadwood may fall and cause injury or damage and should be removed, otherwise deadwood can remain intact for conservation purposes (insects, fungi, birds etc.).
Deadwood (verb)	The removal of dead branches from a tree's canopy, usually of a specified size (in diameter).
Decay	Progressive deterioration of organic tissues, usually caused by fungal or bacterial organisms, resulting in loss of cell structure, strength, and function. In wood, the loss of structural strength.
Decay Detection	The assessment of decay within a tree has been traditionally difficult, but recent advances have made it possible to achieve accurate representations of the internal section of a tree in both 2D and 3D, removing doubt over the condition of the tree and allowing accurate management decisions.
Decurrent	In trees a, system of branching in which the crown is borne on a number of major widely spreading limbs of similar size. In fungi relates to toadstools whose gills run down the stem and leaves and other plant organs, which extend down the stem.
Defect	In relation to tree hazards, any feature of a tree which detracts from the uniform distribution of mechanical stress, or which makes the tree mechanically unsuited to its environment.



Defoliation	The losing of plants foliage.
Dieback	Progressive death of buds, twigs and branch tissues, on individual limbs resulting in Deadwood, or throughout the canopy, extreme cases can result in Stag Heading.
Dripline	A projected line on the ground that corresponds to the spread of branches in the canopy; the farthest spread of branches.
Epicormic shoots	Fast growing, weakly attached shoots/branches that often grow as a response to stress factors upon a tree or branch removal.
Excurrent	In trees, a system of branching that a single leader remains dominant, through the control of lateral branches.
Failure	In connection with tree hazards, a partial or total fracture within the wood tissue or loss of cohesion between roots and soil. (In total failure affected parts will snap or tear away completely, Partial failure there is a crack or deformation, which results in an altered distribution of mechanical stress.
Feeder Roots	Fine fibrous Water and nutrient absorbing roots located in the outer root system.
Flush-Cut	In trees and shrubs, a pruning cut close to the parent stem, which removes the branch bark ridge.
Foliage	The live leaves or needles of the tree; the plant part primarily responsible for photosynthesis.
Formative pruning	The trimming of a tree to remove weaknesses and irregularities which may lead to problems. The formative pruning operation is aimed at reducing the potential for future weaknesses or problems within the tree's crown.
Gall	An abnormal, disorganized growth of plant tissues, caused by parasitic or infectious organisms such as insects, fungi, bacteria, or viruses.
Girdling	In woody plants, any form of damage that destroys the bark and / or the Cambium all the way around the stem, branch or root, normally resulting in death of the damaged section.
Girdling Root	In woody plants, a root that grows across the buttress, or across other roots, eventually causing constriction of the radial growth.
Growth Increment	The incremental growth added as new annual ring develops each season over existing wood. This is seen as (growth) rings in cross-sections of wood.
Hazard beam	An upwardly curved branch in which strong internal stresses may occur without the compensatory formation of extra wood (longitudinal splitting may occur in some cases).
Heartwood	Inner non functioning tissues that provide structural support to trunk.
Heave	In relation to shrinkable clay soils, expansion due to rewetting of a volume of soil previously subjected to the removal or water by plant / trees following felling or root severance. Also in relation to root growth, the lifting of pavements and other structures by radial expansion. Also in relation to tree stability, the lifting of one side of a wind rocked root plate.
Herbicide	A chemical compound that causes the death of a plant.
Included Bark	Bark that becomes embedded in a crotch between branch and trunk or between co-dominant stems, usually found in narrow or tight crotches, and causes a weak structure.
Increment Borer	A tool that cuts and extracts a narrow cylinder of wood from a tree for analysis of the wood tissue and growth increments.
Leader	The primary terminal shoot or trunk of a tree.
Limb	A large lateral branch growing from the main trunk or from another larger branch.
Lion Tailing	Often the result of poor pruning practices; the main leader or branches are largely devoid of side branches, growth is restricted to the end of branches and is likely to suffer damage through end loading.
Lopping	In trees, a general term that related to the removal of branches from a tree.
Monitoring	Due to the relative life span of trees in relation to our own, long-term monitoring provides a valuable insight to the health of trees, identifying decline and or stabilisation and or improvement.
Mulch	A material laid over the root system of a tree to help conserve moisture within the soil. Additionally it may help control the development of weeds close to the tree.
Mycelium	A mass of growing filaments (hyphae) formed by fungi.
Mycorrhizae	The symbiotic relationship between roots and certain beneficial fungi. Mycorrhizae are the combined root / fungal growth.
Natural Pruning	The shedding of a branch or twig that has died back naturally and has become decayed at or near its base.
Necrosis	The failure and subsequent death of a branch, leader or tree.
Negligence	A failure to take reasonable action to deal with a hazard to prevent damage to property or person.
Nutrient	Substances that are absorbed by living organisms for the maintenance of internal processes.
Occluding tissue	The general term of wood, cambium and bark that develop around the site of a wound on a woody plant
Pathogen	A microorganism that causes diseases within another organism.
Phloem	The principle conductive tissue that the products of Photosynthesis are transported around the plant
Photosynthesis	The process where light energy is used to create energy (Carbohydrate) for use within the plant.
Pollard	A term for a pollarded tree.
Pollard head	The swollen section of branch / stem that forms behind the pollarding cut.
Pollarding	The complete or partial removal of the crown of a young tree so as to encourage the development of numerous branches either for amenity or historically as fodder, repeated management is required cyclically to maintain the feature
Prune or Pruning	Selective removal of woody plant parts of any size, using saws, Loppers, Secateurs, or other pruning tools.
Reaction Wood	Wood with distinctive anatomical characteristics, formed in parts of leaning or crooked stems and in branches to provide additional strength / support. In hardwoods, tension wood usually forms. In conifers, compression wood is usually found.
Reaction Zone	A zone normally darker than surrounding wood that denoted the boundary often a defensive one between functional sapwood and dysfunctional or decaying wood.
Re-grading	The raising or lowering of a soil profile from its original grade.
Rejuvenation pruning	Where historically or environmentally important trees are to be retained, their life spans can be significantly extended through the adoption of particular pruning regimes.
Rejuvenation root treatment	Management of the root zone can have a significant positive effect upon the health of trees. Physical, mechanical and biological approaches are available and can be prescribed in accordance within the constraints of individual sites.
Remedial pruning	The removal of old stubs, deadwood, epicormic growth, rubbing or crossing branches and other unwanted items from the tree's crown.
Resistograph	Invasive decay detection technique whereby the resistance offered by the timber to a spinning probe is measured and plotted.
Rib	In tree body language, a long narrow, axial protuberance which often over lays a crack.
Ring Barking	Artificial Girdling of the stem, to result in the death of a tree. May be used in habitat creation where the retention of dead standing trees is required.
Rod Bracing / Bolting	Traditionally, this has relied upon the installation of steel rods or bolts through the stems or limbs, to reduce twisting or splitting of the wood. The installation of such features does require legal interpretation.



Root Barriers	Both Buildings and services can benefit from the installation of root barriers to protect a soil volume from the ingress of roots.
Root Collar	The basal area of the tree; transition zone from trunk to root. Also sometimes called trunk flare.
Root Plate	The primary support area for the tree; an area of the root system close to the base that structurally anchors the tree to the soil.
Root Rot	Either a general term for decay within the wood of the lower stem / buttress roots, or a disease in which the fine roots are killed.
Root System	The portion of the tree containing the root organs, including buttress roots, transport roots, and fine absorbing roots; all underground parts of the tree.
Root Zone	The area and volume of soil around the tree in which roots are expected. May extend to three or more times the branch spread of the tree, or several times the height of the tree.
Sail Area	That area of the tree subjected to wind load.
Sanitation	In plant disease control, the removal of material that could a source of infection by a pathogen. Removal of diseased plant parts, such as fallen leaves and twigs, and pruning of dead and diseased branches. Diseased parts should be burned or buried under soil or active compost.
Sapwood	Xylem wood tissue, usually light in colour, representing the outer growth rings of the wood. Usually living, reactive wood tissue, in a healthy tree. See heartwood
Scaffold limbs / scaffold Branches	The branches that from the main network framework of the crown of a tree.
Senescent	A decline in growth and vigour due to age or stress factors.
Shrub	A woody plant that branches at or close to the ground level and so does not have a single stem.
Slime Flux	Relating to a toxic condition from the spreading of bacteria or their products from a source of infection; characterized by malodorous gases, or salt deposits upon the bark. If these products enter the sap stream, localised vessel necrosis can result, usually associated with anaerobic conditions.
Soft Rot	A kind of wood decay, where a fungi degrades cellulose within the cell wall, without causing overall degradation.
Soil Compaction	The compression of soil, causing a reduction of pore space and an increase in the density of the soil. Air is squeezed out and nutrients become locked. Tree roots cannot grow in compacted soil.
Soil Profile	The characteristics of a soil as regards to relative depth; the changes in soil texture and composition that occur with depth.
Soil Texture	The classification of the constituent particles of soil; includes sand, silt and clay particles. Directly related to soil porosity, permeability, and aeration.
Sonic Decay Detection	Non invasive method whereby sound waves are passed through the tree and the speed is measured. Slow speeds indicate decay and a tomography picture representing the inner stem is produced.
Stag Heading	In a tree, a state of dieback where dead branches protrude beyond the current living crown.
Stress	In plant physiology, conditions were one or more physiological functions are not working within normal parameters.
Stump Grinding	The removal of a tree stump using a specialist grinding machine.
Subsidence	In relation to vegetation, the removal of water by plant growth resulting in localised shrinkage in the soil volume.
Sucker	Same as sprout.
Suppressed	Trees which are dominated by surrounding vegetation and whose crown development is restricted from above.
Systemic	Affecting the whole plant or organism. A systemic compound is carried throughout the entire plant to all parts through the vascular system.
Target	Any person or object within reach of a falling tree or part of a tree that may be injured or damaged.
Target Pruning	The pruning of a branch where the wound affects only branch material, often result in a target shaped wound.
Tension Wood	Reaction wood typically formed on the upper side of limbs or curved stems; characterized by lack of cell wall lignifications (higher ratios of cellulose to lignin).
Tight Union / Tight Crotch	Also, narrow crotch. A crotch with a narrow angle between branches, often having included bark.
Tomography	The comparison of sound or stress waves through the tree allows the creation of a 2D or 3D representation of the internal structure of a stem or branch section and highlights areas of damage. Virtually non-injurious.
Topography	The configuration of surface features, including the vertical and horizontal relationships of the ground and other features.
Topping	Cutting large limbs back severely, without regard to form or habit of the tree. Cuts are usually made between lateral branch nodes. This practice is extremely injurious to trees, and promotes decay and structural weakness within the crown.
Tree	A woody plant that typically has a single stem, at maturity has a height of at least 4 metres and a stem diameter at breast height of at least 75mm.
Tree Preservation Order	In Great Britain, an order made by the local planning authority, where consent must be gained before undertaking all but exempt works to a tree.
Trunk Flare	The basal area of the trunk that flares or widens, and merges with the main roots. See root collar
Veteran Tree	Veteran trees are often found in large parks or estates and commonly affected by extensive decay or have been subject to extensive works. These trees are retained for historical importance and often pose greater risk than normal, which is generally justified. They need careful management and often propping or bracing to support them, some require fencing to limit access.
Vigour	Active, healthy growth of plants: ability to respond to stress factors.
Visual Tree Assessment (VTA)	An assessment of the mechanical condition of trees based upon their 'body language'. Trees are dynamic and respond to faults / decay / environmental factors in various ways, these responses can be indicative of structural integrity.
Wetwood	An infection caused by bacteria living inside the plant tissues. The bacteria ferment the plant fluids, resulting in death of nearby cells, and often causing exudations of fluid from the bark, often referred to as a Slime Flux.
White Rot	A kind of wood decay where a fungi attacks the lignin within the wood matrix
Wind loading	Forces placed upon tree canopy, branches, trunk and roots of a tree under windy conditions.
Wind Throw	The failure of a tree due to wind loading.
Witches Broom	A deformed or unusual growth of twigs from adventitious buds, caused by insects, disease, or dieback of twigs and buds.
Wood	Secondary Xylem; the main structural support and water conducting tissue of trees and shrubs.
Wound Response Tissue	Also Occluding Tissue, Wound Wood or Callus. Differentiated wood tissue that grows around the margins of a wound or injury.
Wound Wood	Wood with atypical features, formed in the vicinity of a wound and a term to describe the occluding tissues around a wound
Xylem	Plant tissues with special function of translocation of water and dissolved nutrients.



Appendix 3: Survey Methodology

- A2.1 Ground level visual surveys are carried out using the *Visual Tree Assessment* technique described by Mattheck and Broeler (1994) and endorsed by the Arboricultural Association (LANTRA Professional Tree Inspection course, 2007).
- A2.2 Structural condition is assessed by inspecting the stem and scaffold branches from all angles looking for weak branch junctions or symptoms of decay. Particular attention is paid to the stem-base. Cavities are explored using a metal probe in order to assess the extent of any decay. If this is not possible further inspection is recommended in the form of a climbed inspection or using specialist decay detection equipment.
- A2.3 The physiological condition is assessed by inspecting the stem, branches and foliage for symptoms of disease. The overall vigour of the tree is also taken into account.
- A2.4 Where significant defects are observed, recommendations are made according to a scale of priority in order to reduce the likelihood of structural failure. The position of the tree and its potential targets are taken into account.
- A2.5 Measurements are obtained using a diameter tape, clinometer, distometer and loggers tape. Where this is not practical measurements are estimated.
- A2.6 Some trees are surveyed as groups, though this is usually avoided close to areas likely to be developed.
- A2.7 Finally, a *Retention Category* is allocated as described in Appendix 1.1.1.

Appendix 4: Author's Qualifications

Qualifications & Experience of Ivan Button N.C.H. (Arb), FDS (Arb), BSc (Hons), P.G.C.E., M. Arbor. A.

Construction

Between 1983 and 1995 Ivan worked primarily within the construction industry and received training in a broad range of practical building skills and general construction principles. During this time he obtained a BSc (Hons) at Leeds University followed by a P.G.C.E at The University of Wales.

Arboriculture

He obtained a NCH (Arboriculture) at the University of Lincoln and became a member of the Arboricultural Association. He then worked for an Arboricultural Consultancy for one year before establishing a tree surgery and landscaping business in 1998. In 2005 Ivan commenced full time employment with a leading Arboricultural Association approved consultancy and soon adopted a senior role responsible for five consultants.

He obtained a FDS in arboriculture at the University of Lancashire, which he passed with distinction and is now a Director and Principal Consultant of Crown Consultants Ltd. He is accredited as a LANTRA *Professional Tree Inspector*. A qualification produced in association with the Arboricultural Association and generally recognised as appropriate for all levels of tree inspection.

He is a member of the Consulting Arborist Society and is listed within their areas of professional expertise for QTRA and as an expert witness.

Ivan is a professional member of the Arboricultural Association and the International Society of Arboriculture.

He is a licensed Quantified Tree Risk Assessment user.

Ivan has undertaken professional expert witness training and has been registered as a Sweet and Maxwell Checked Expert Witness since 2008.

Throughout 2009 acted as the principal Tree Officer for Barnsley Metropolitan Borough Council.

Ivan has produced several hundred Arboricultural Reports for the purposes of Development, Safety, Management, Mortgage, Subsidence, Mitigation and Litigation.



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for: EC Harris LLP

Crown Ref: 09056B

Site: Grafton Mews

Author: Ivan Button

Date: 5th June 2014

Appendix 5: Further Information

Building Near Trees – General

National Joint Utilities Group publication # 10 (1995), *Guidelines for the Planning, Installation and Maintenance of Utility Services in Proximity to Trees*. Downloadable at www.njug.demon.co.uk/pdf/NJUG%20Publication10.pdf

NHBC Standards Chapter 4.2., *Trees and Buildings*.

Horticulture LINK project 212. (University of Cambridge, 2004), *Controlling Water Use of Trees to Alleviate Subsidence Risk*.

Tree Planting and aftercare

See www.trees.org.uk/leaflets.php# for downloadable leaflets on selecting a garden tree, planting, aftercare and veteran tree management.

British Standards

BS 5837: 2012. Trees in Relation to Design, Demolition and Construction – Recommendations.

Bs 3998: 2010. Recommendations for Tree Work.

BS 3936: 1992. Nursery Stock. Part 1: Specification for Trees and Shrubs.

BS 3936: 1992. Nursery Stock. Part 10: Specification for Groundcover Plants.

BS 4043: 1989. Transplanting Root-balled Trees.

BS 8004: 1986. Foundations.

BS 8103: 1995. Structural design of Low-Rise Buildings.

BS 8206: 1992. Lighting for Buildings.

BS 3882: 2007. Topsoil.

BS 4428: 1989. General Landscaping Operations (excluding hard surfaces).

Permission to do Works to Protected Trees / Tree Law

Forestry Commission (Edinburgh, 2003), *Tree Felling – Getting Permission*. Country Services Division - Forestry Commission. Downloadable at [www.forestry.gov.uk/website/pdf.nsf/pdf/wgsfell.pdf/\\$FILE/wgsfell.pdf](http://www.forestry.gov.uk/website/pdf.nsf/pdf/wgsfell.pdf/$FILE/wgsfell.pdf)

Transport and the Regions (Department of the Environment, 2000), *Tree Preservation Orders, A Guide to the Law and Good Practice*. Downloadable at www.communities.gov.uk/publications/planningandbuilding/tposguide

C. Mynors, *The Law of Trees, Forests and Hedgerows* (Sweet and Maxwell, London, 2002)

Communities and Local Government website with numerous downloadable documents, from: <http://www.communities.gov.uk/planningandbuilding/planning/treeshighhedges/>

Lighting Levels

P.J. Littlefair, *B.R.E. 209: Site layout planning for daylight and sunlight A guide to good practice*. B.R.E. Bookshop, London.

British Standards Institution. Code of practice for day lighting. *British Standard BS 8206: Part 2* (1992).

Chartered Institution of Building Services Engineers. *Applications manual: Window Design* (London, 1987).

NBA Tectonics. A study of passive solar housing estate layout. *ETSU Report S-1126*. Harwell, Energy Technology Support Unit (1988).

I.P. Duncan; D. Hawkes, *Passive solar design in non-domestic buildings*. *ETSU Report S-1110*. Harwell, Energy Technology.

P. J. Littlefair, *Measuring Daylight, BRE Information Paper 23/93 f3.50*. (Advises on measuring daylight under the real sky or an artificial sky, allowing for the changing nature of sky light).

High Hedges

Communities and Local Government website with numerous downloadable documents, from: <http://www.communities.gov.uk/planningandbuilding/planning/treeshighhedges/>

Tree Specific Websites

www.crowntrees.co.uk

Crown Consultants site containing useful information

www.trees.org.uk

Arboricultural Association

www.rfs.co.uk

Royal Forestry Society of England, Wales and N. Ireland

www.treehelp.info

The Tree Advice Trust

www.woodland-trust.org.uk

The Woodland Trust

www.treecouncil.org.uk

The Tree Council



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for: EC Harris LLP

Crown Ref: 09056B

Site: Grafton Mews



Author: Ivan Button

Date: 5th June 2014

Appendix 6: Tree Data Schedule and Site Plan(s)

The Tree Data Schedule and all plans accompanying this report follow this page. They are also provided as separate documents for ease of printing and referring between when viewing on a screen.

Reference G = Group H = Hedge	Age & Species	Height (m)	Crown Ht (m)	Diameter (cm)	Crown Spread (m) N W E S	Scaled Tree Diagram (m)	Notes	Recommendations (Independent of any development proposals)		Vigour	Amenity Value
								Priority	Inspect Freq (yrs)	Physiological Condition	Life Expectancy (yrs)
										Structural Condition	Retention Category
T104	Semi-Mature Norway Maple Acer platanoides.	8	2.5	25	3 3 3		Position: Street tree. Form: Multi-stemmed at 2.5m with a well-formed crown. History: No evidence of significant pruning. Defects: No significant defects observed.	No action required.		High Good Good	Moderate 40+ B
	n/a							3			
T105	Semi-Mature Cherry Laurel Prunus laurocerasus.	5	2	20	3 3 3		Form: Multi-stemmed at 1m with a balanced crown. History: No evidence of significant pruning. Defects: No significant defects observed.	No action required.		Moderate Good Good	Low 20-40 C
	n/a							3			
T106	Semi-Mature Rowan Sorbus aucuparia.	6	3	20	2.5 2.5 2.5		Form: Multi-stemmed at 2m with a balanced crown. History: No evidence of significant pruning. Defects: No significant defects observed. Other: Limited inspection, dimensions estimated.	No action required.		Moderate Good Good	Low 20-40 C
	n/a							3			
T107	Semi-Mature Sycamore Acer pseudoplatanus.	7	4	33	4 4 4		Position: Situated on third party land. Form: Multi-stemmed at 3m with a slightly unbalanced crown. History: No evidence of significant pruning. Defects: No significant defects observed. Other: Limited inspection, dimensions estimated.	No action required.		High Good Good	Low 40+ C
	n/a							3			
T108	Semi-Mature Cherry Prunus sp.	8	4	35	5 2 2.5		Form: Single stemmed and vertical with an unbalanced crown. History: Occasional pruning wounds due to crown lifting (healing slowly). Defects: No significant defects observed.	No action required.		Moderate Good Good	Low 20-40 C
	n/a							3			
T109	Early-Mature Norway Maple Acer platanoides.	11	4	44	4.5 5.5 5.5		Form: Twin-stemmed at 2.5m with a slightly unbalanced crown. History: Occasional pruning wounds due to crown lifting (healing slowly). Defects: No significant defects observed.	No action required.		Moderate Good Good	Moderate 40+ B
	n/a							3			
T110	Young Ash Fraxinus excelsior.	5.5	3.5	15	3 3 1		Position: Situated on third party land. Form: Single kinked stem. Sparse canopy. History: Heavily and inexpertly reduced. Defects: No significant defects observed. Other: Poor specimen.	No action required.		Moderate Good Good	Low 40+ C -
	n/a							3			

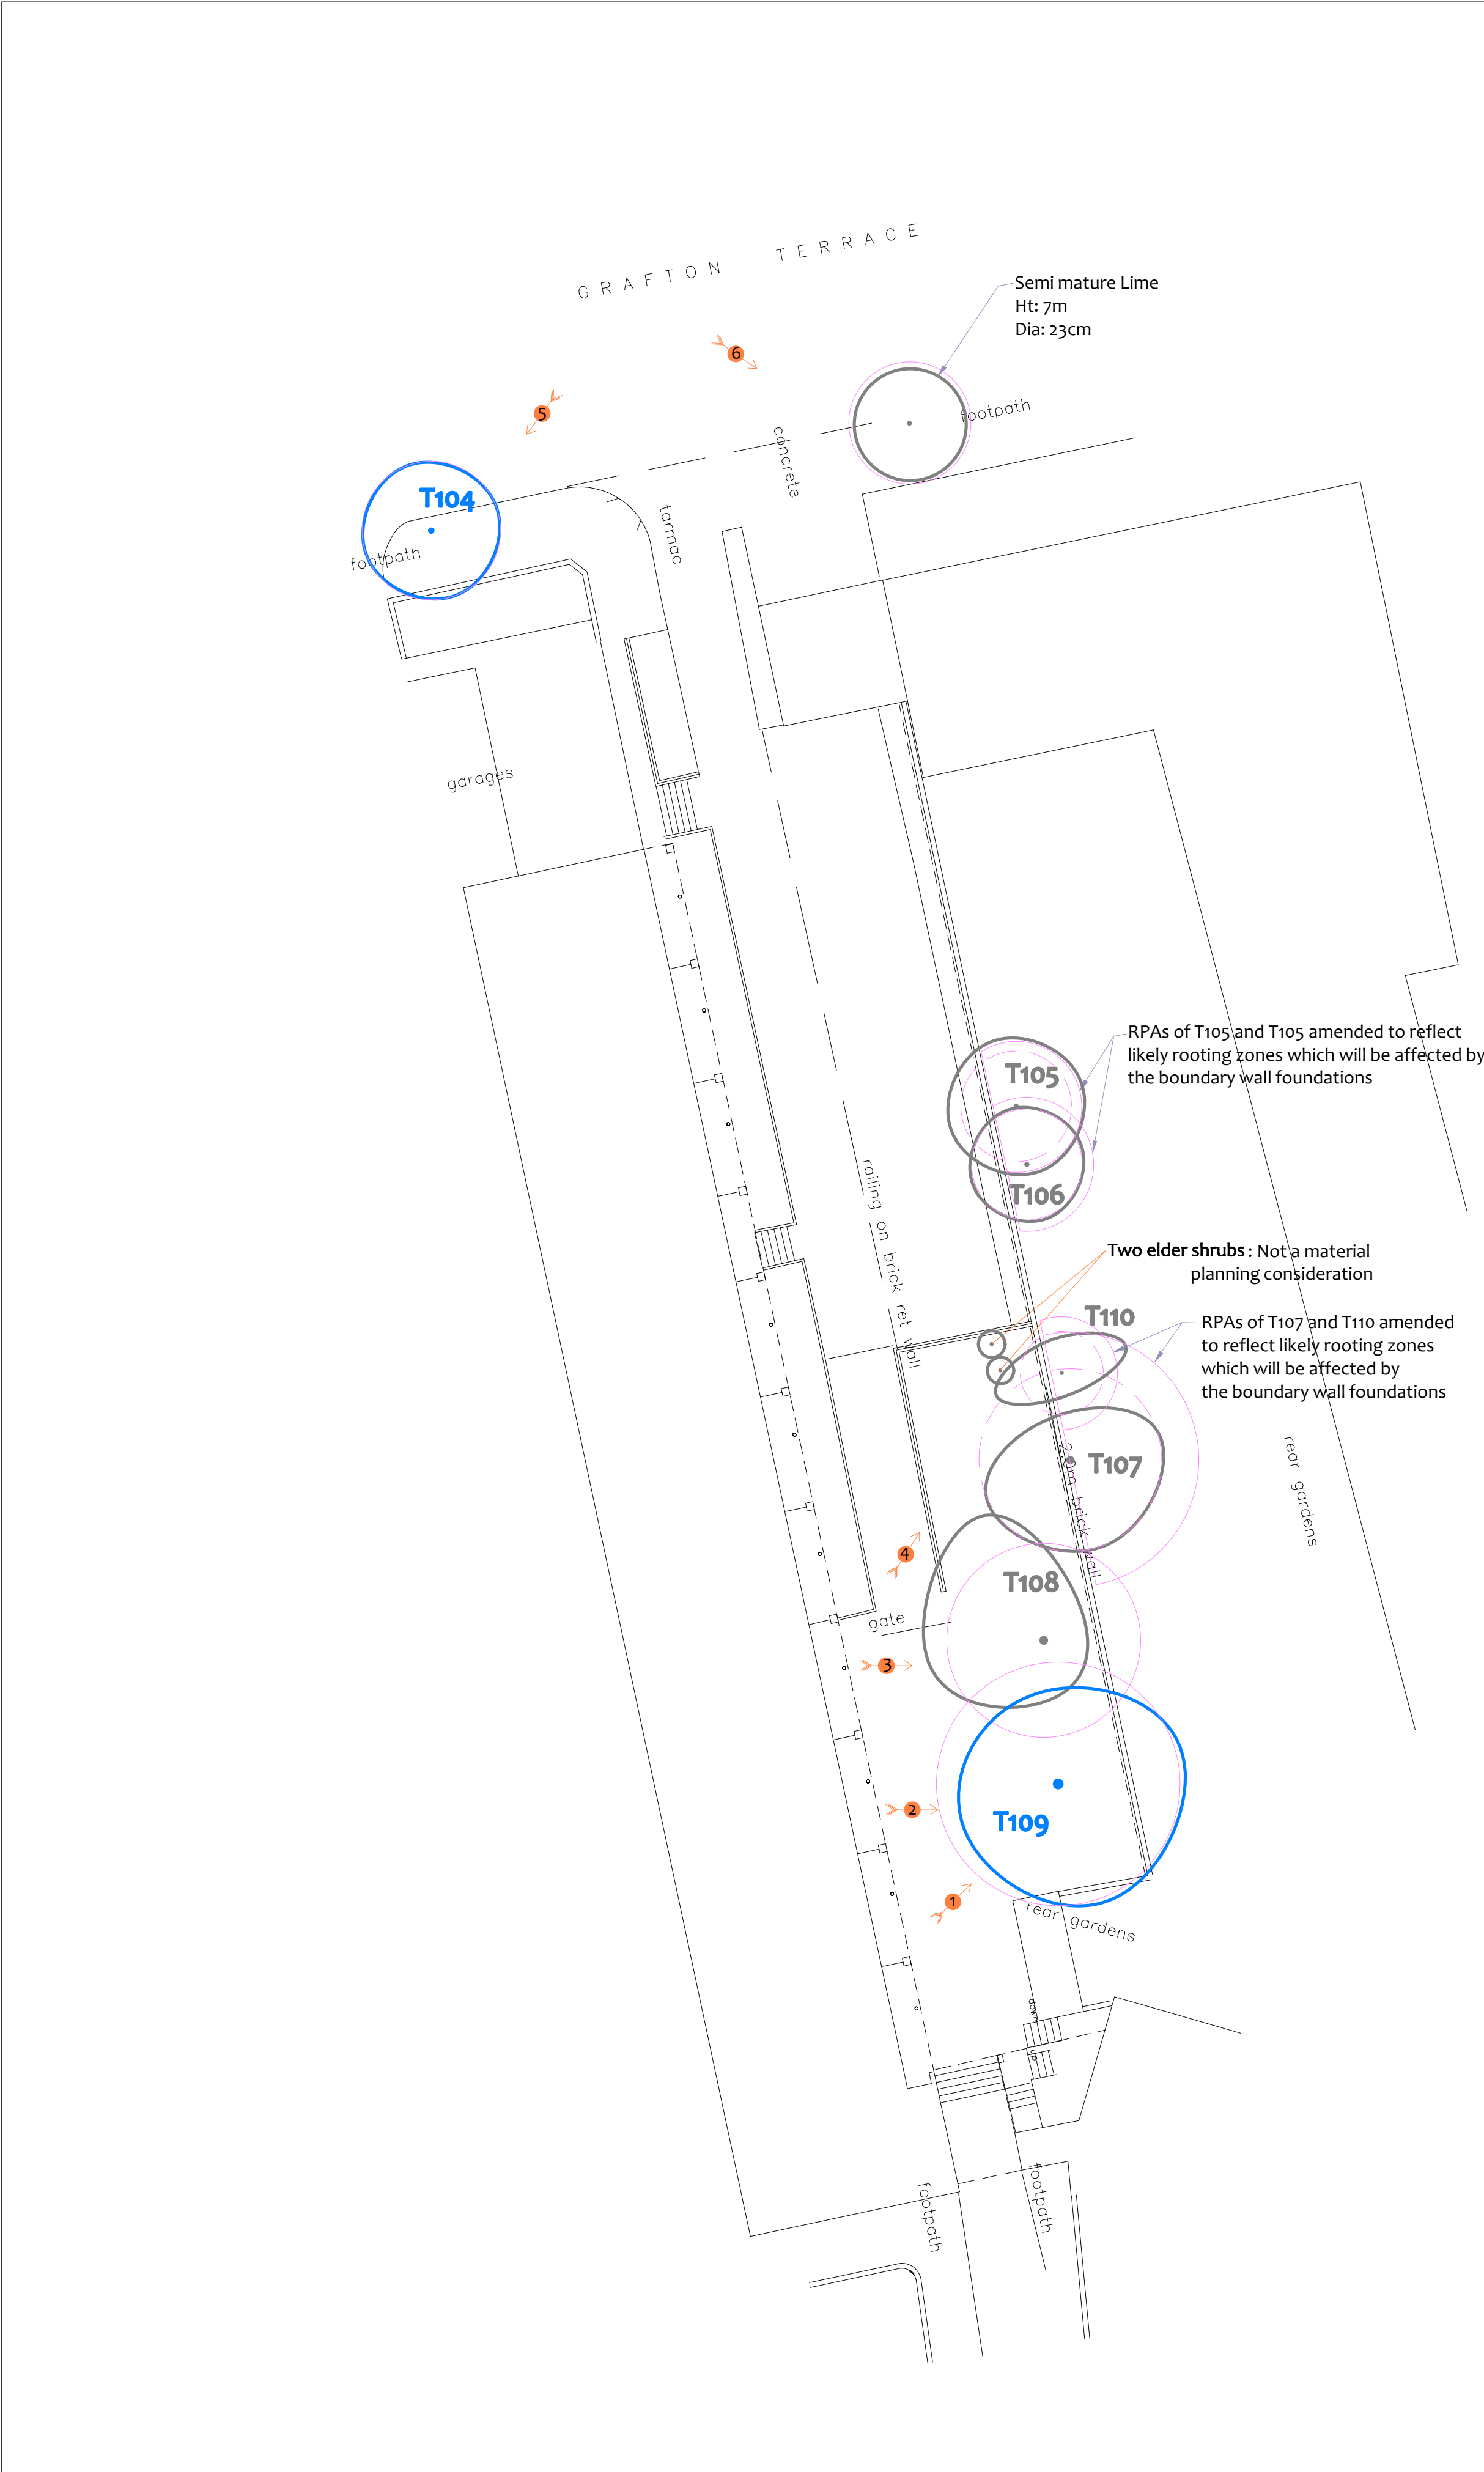

Tree Constraints Plan



Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6

Tree Ref.	Species	Height (m)	Root Protection Area		
			Radius (m)	m²	Square (m)
T104	Norway Maple	8	3.0	28	5.3
T105	Cherry Laurel	5	2.4	18	4.3
T106	Rowan	6	2.4	18	4.3
T107	Sycamore	7	4.0	49	7.0
T108	Cherry	8	4.2	55	7.4
T109	Norway Maple	11	5.3	88	9.4
T110	Ash	5.5	1.8	10	3.2

1

Photo 1

MN = Measured North:
Canopy spreads are sometimes measured to an approximate N defined by site features. Often more accurate, especially where rows of trees are not aligned N-S or E-W.



Tree Retention Categories	
Stems & canopies shown	
	Category A tree
	Category B tree
	Category C tree
	Category U tree

Trees of high quality with an estimated life expectancy of 40+ years. Usually large trees with significant presence or smaller trees with excellent form. Retention of these trees is highly desirable.

Trees of moderate quality with a life expectancy of 20+ years. Usually maturing trees, or younger trees with good form. Retention of these trees is desirable though less than Category A trees

Unremarkable trees of low quality and merit. Individual specimens are not considered to be a material planning consideration.

Trees unsuitable for retention due to their very poor condition.

Drawing No: CCL 09506B / TCP Rev: 1

Title: Tree Constraints Plan (Existing Layout)

Site: Adjacent Maitland Park

Scale: 1:200

0 5 10m

Paper Size: A2


BS 5837 Root Protection Area (radius = 12xstem diameter)

Root Protection Area needing amendment due to site conditions, e.g. presence of existing road or building.

Root Protection Area having been amended to account for site conditions

T1 = Tree No 1 G2 = Group No 2 H3 = Hedge No 3

Proposed Layout (Pale Green)




Impact Assessment Plan

(Existing Layout with Proposals Overlaid)

No tree removal or pruning is required to facilitate the proposed development works.

However, the two elder shrubs growing to the north of T08 may be removed to facilitate resurfacing works

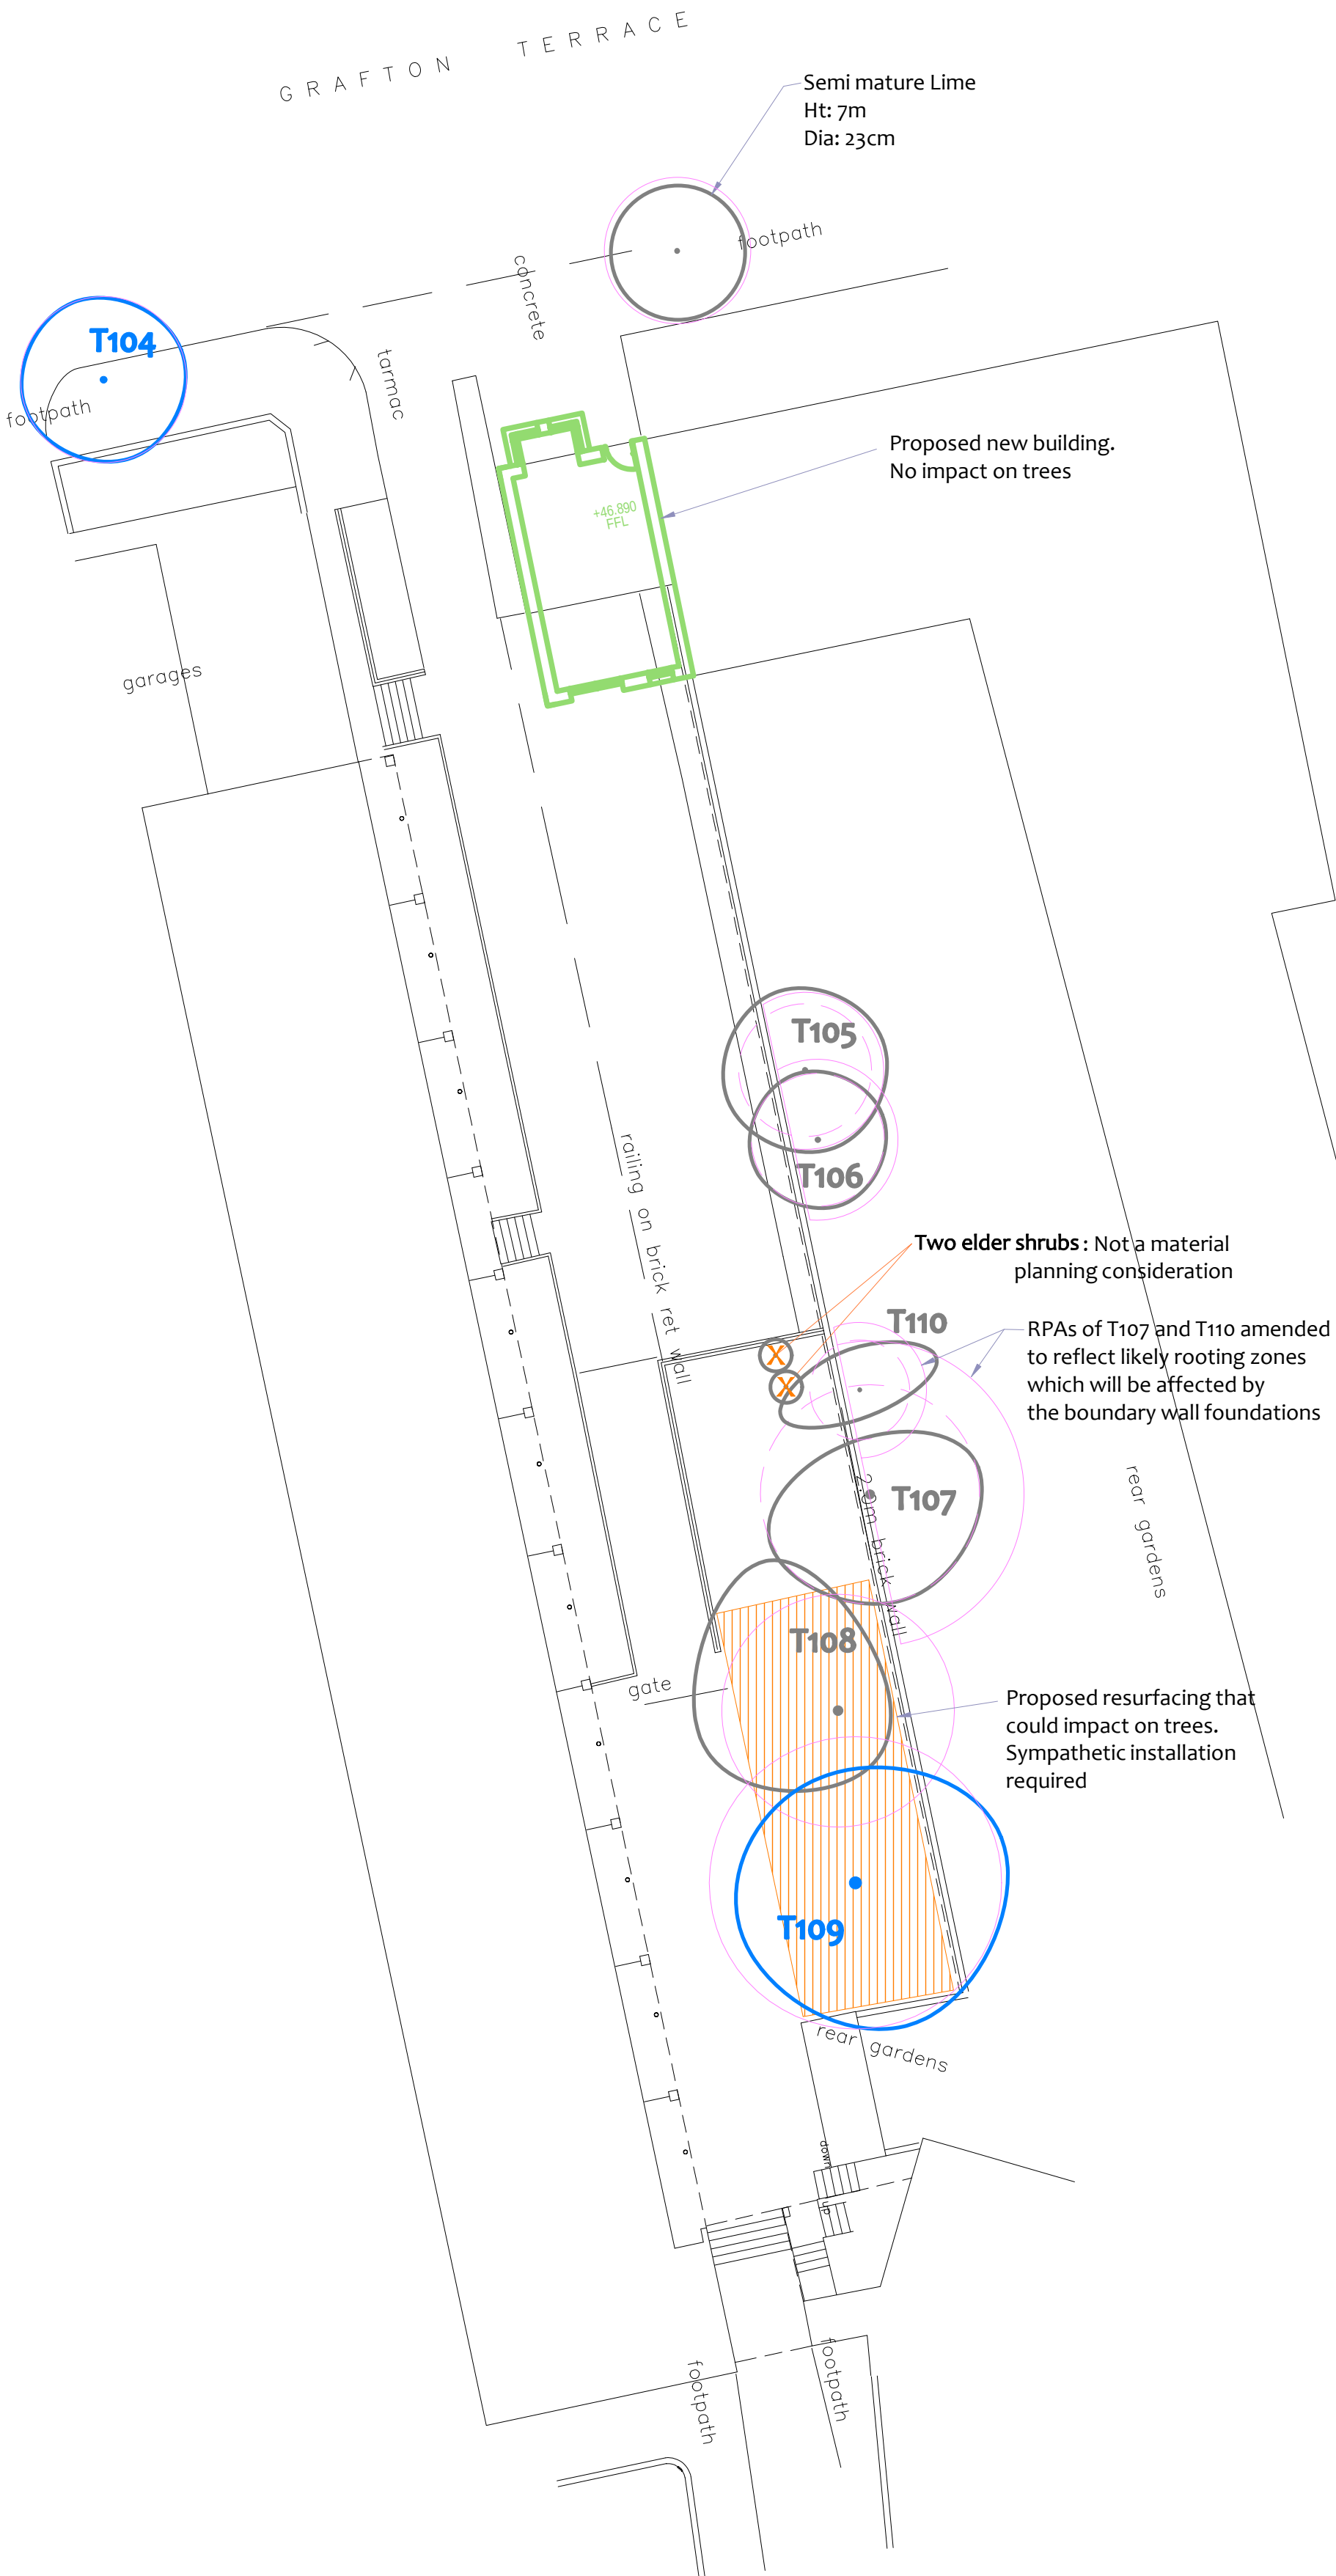

Tree Ref.	Species	Height (m)	Root Protection Area		
			Radius (m)	m²	Square (m)
T104	Norway Maple	8	3.0	28	5.3
T105	Cherry Laurel	5	2.4	18	4.3
T106	Rowan	6	2.4	18	4.3
T107	Sycamore	7	4.0	49	7.0
T108	Cherry	8	4.2	55	7.4
T109	Norway Maple	11	5.3	88	9.4
T110	Ash	5.5	1.8	10	3.2



CROWN
Arboricultural Consultants
01422 316660

Tree Retention Categories
Stems & canopies shown

-  Category A tree
-  Category B tree
-  Category C tree
-  Category U tree

 Trees of high quality with an estimated life expectancy of 40+ years. Usually large trees with significant presence or smaller trees with excellent form. Retention of these trees is highly desirable.

 Trees of moderate quality with a life expectancy of 20+ years. Usually maturing trees, or younger trees with good form. Retention of these trees is desirable though less than Category A trees

 Unremarkable trees of low quality and merit. Individual specimens are not considered to be a material planning consideration.

 Trees unsuitable for retention due to their very poor condition.

Drawing No: CCL 09506B / IAP Rev: 1

Title: Impact Assessment Plan (Proposals Overlaid)

Site: Adjacent Maitland Park

Scale: 1:200

Paper Size: A2

BS 5837 Root Protection Area (radius = 12xstem diameter)

Root Protection Area needing amendment due to site conditions, e.g. presence of existing road or building.

Root Protection Area having been amended to account for for site conditions

T1 = Tree No 1 G2 = Group No 2 H3 = Hedge No 3


 Tree to be removed to facilitate the proposal

 Tree to be removed due to its low quality

 Proposed pruning

MN = Measured North:

Canopy spreads are sometimes measured to an approximate N defined by site features. Often more accurate, especially where rows of trees are not aligned N-S or E-W.



Tree Protection Barriers:

Tree Protection Plywood Boxes
(indicated by a 1mm turquoise line)



	Restricted Zone C		
---	--------------------------	--	--

The diagram shows a cross-section of a concrete slab being laid. A concrete pump, represented by an orange cylinder with a hose, is positioned on the left. The hose leads to a grey circular nozzle that is extruding a grey concrete mix onto a prepared base. The base consists of a blue layer labeled 'Sturdy plastic sheeting e.g. 1200 gauge DPM' and a brown layer labeled 'Plywood board over plastic sheet'. The concrete is being laid between two vertical grey lines labeled 'Raised batten'. The concrete slab is shown in a cross-section, with a grey top layer and a brown bottom layer.

Tree Ref.	Species	Height (m)	Root Protection Area		
			Radius (m)	m²	Square (m)
T104	Norway Maple	8	3.0	28	5.3
T105	Cherry Laurel	5	2.4	18	4.3
T106	Rowan	6	2.4	18	4.3
T107	Sycamore	7	4.0	49	7.0
T108	Cherry	8	4.2	55	7.4
T109	Norway Maple	11	5.3	88	9.4
T110	Ash	5.5	1.8	10	3.2

MN = Measured North:

Canopy spreads are sometimes measured to an approximate N defined by site features. Often more accurate, especially where rows of trees are not aligned N-S or E-W.

- 6.5. Construction Exclusion Zones**
- 6.5.1. No works or ground disturbance whatsoever shall occur within the.
- 6.5.2. Within square planted areas around T108 and T109 the following restrictions shall apply:
- Plywood boxing shall be erected and maintained throughout the entire project as indicated on the Tree Protection Plan and specified in Section 8 - *Tree Protection Barriers*.
 - No construction activity whatsoever shall occur.
 - No tree works shall be undertaken.
 - No alterations of ground levels or conditions.
 - No chemicals or cement washings permitted.
 - No excavation whatsoever.
 - No temporary structures.
 - No spoil shall be stored.
 - No fires shall be permitted.
 - All hazardous materials (including non-essential cement products) shall be forbidden.
- 6.5.3. If the edges of the planters require replacing, this shall be done using hand tools and without excavating beneath the existing foundations. All roots in excess of 25mm shall be kept intact.
- 6.6. Restricted Activity Zone C**
- 6.6.1. Within this zone (indicated on the Tree Protection Plan) it is proposed to replace the existing surface. The following restrictions shall apply:
- No other building works shall be permitted.
 - Further detailed restrictions are specified in Section 9.1.
 - No vehicle or plant machinery shall drive within this Zone during the resurfacing operation.
 - No fires shall be permitted.
 - All hazardous materials (including non-essential cement products) shall be forbidden.
 - No machinery in excess of 4m tall shall pass through this zone.



CROWN
Arboricultural Consultants
01422 316660

- Category A tree
- Category B tree
- Category C tree
- Category U tree



Trees of high quality with an estimated life expectancy of 40+ years. Usually large trees with significant presence or smaller trees with excellent form. Retention of these trees is highly desirable.

Trees of moderate quality with a life expectancy of 20+ years. Usually maturing trees, or younger trees with good form. Retention of these trees is desirable though less than Category A trees

Unremarkable trees of low quality and merit. Individual specimens are not considered to be a material planning consideration.

Trees unsuitable for retention due to their very poor condition.

Scale: 1:200

Paper Size: A2

Group No 1 G2 = Group No 2 H3 = Hedge No 3