JOINERY DETAIL SHEET

1 Pair of Sashes to Cord Hung Sash Window

Customer	Job No	Item No	Sheet
Krueger	**D31209**	**5**	**1 of 2**

Diagram

Location	
First Floor RHS Bathroom	

Material	Quantity
Accoya	**1 Pair**
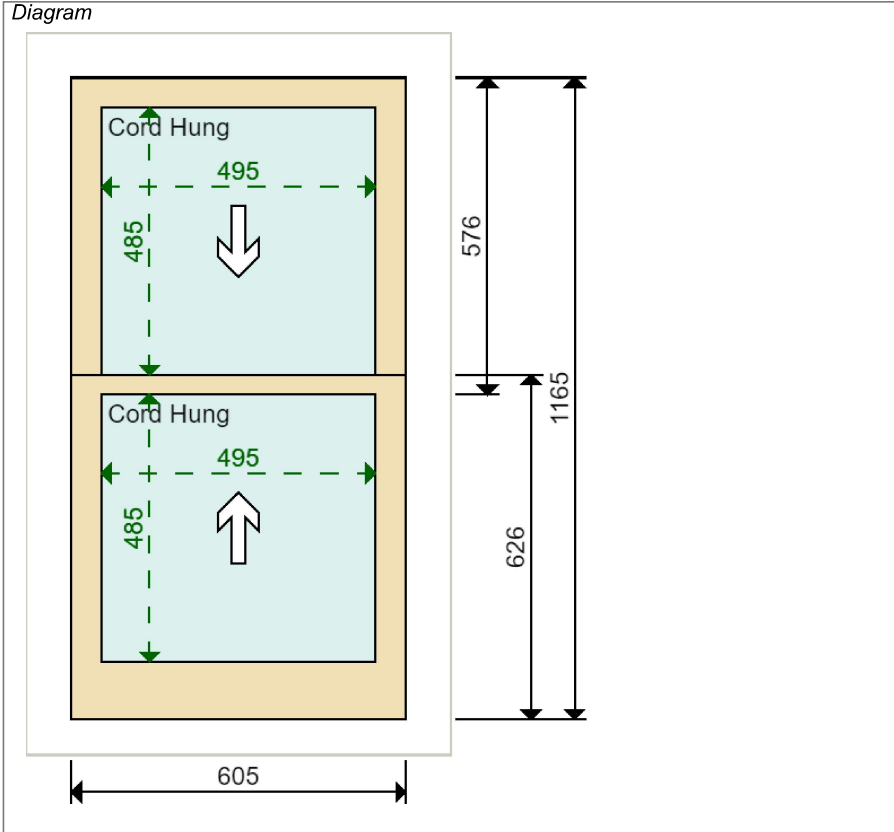
Sectional Details

Sash Head	55 mm
Sash Stile	55 mm
Sash Btm Rail	105 mm Square
Sash Midrail	36 mm
Sash Thickness	36 mm
Top Sash Horn	Template Attached
Btm Sash Horn	No horn

Glazing Bar	N/A
Profile	Ovolo
Moulding Cutter	8 x 8 with 3 mm shoulder
Glazing Rebate	15 x 23 mm

Ironmongery

1 x Fitch Catch SC
1 x Lock Chubb Window Key
4 x Pulley Wheel SS
4 x Rola Lock Back Plate Fastener
2 x Rola Lock SC
2 x Sash Lift SC

Glazing

	Internal Pane	Spacer	External Pane
Top	4mm Planitherm	5mm	4mm Acid Etched
Btm	4mm Planitherm	5mm	4mm Acid Etched

Putty Line Bead   White Tape, White Spacer   Argon Filled

Paint Finish

Internal	Standard White
External	Standard White

Production Notes

15.8 lb, 17 lb (1 1/4 inch lead)   2 | 8 | 3 | 23

Installation Notes

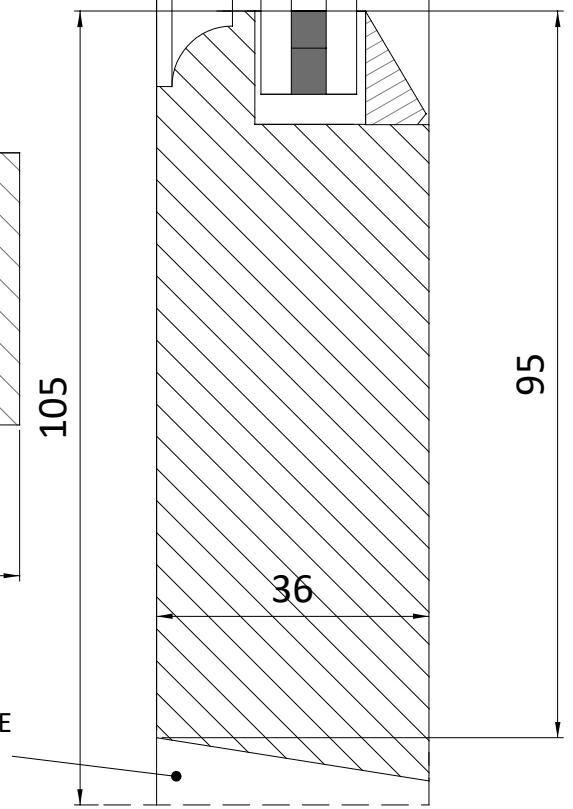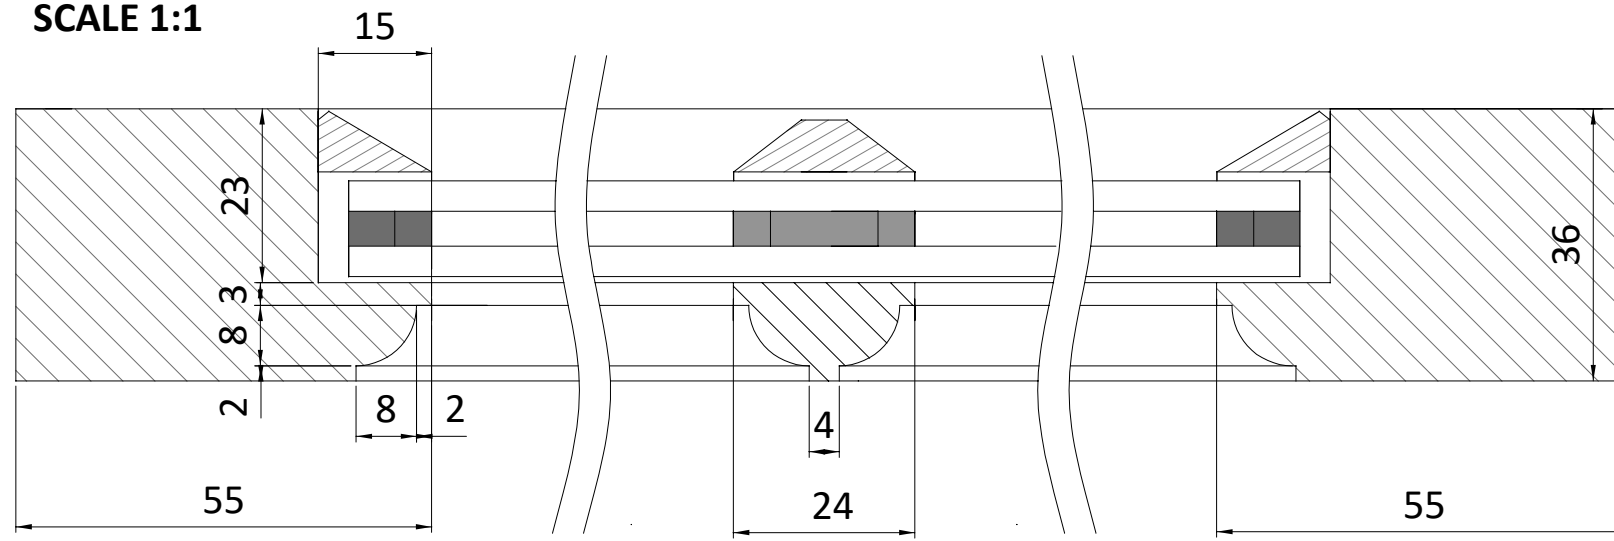Installed: Internally

Job Tracking

Order received: 04-04-2017	Print date: 11-04-2017
Sold by: David Farebrother	Last modified by: Chris Jewiss
Surveyed by: Chris Jewiss	Last modified date: 11-04-2017

SOME STILES, HEADS AND BOTTOM RAILS WILL BE MANUFACTURED OVER SIZE
TO ALLOW FOR TRIIMING FOR OUT OF SQUARE FRAMES. THE DIMENIONS ON
THESE DRAWINGS SHOW THE FINISHED SIZES ONCE FITTED.

**SECTION THROUGH
HEAD, MEETING RAIL
AND BOTTOM RAIL
SCALE 1:1**

36
55
2 8 3 23
8
15
2

36
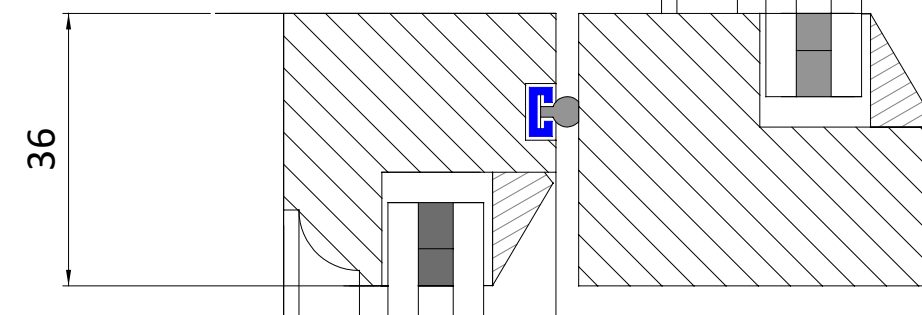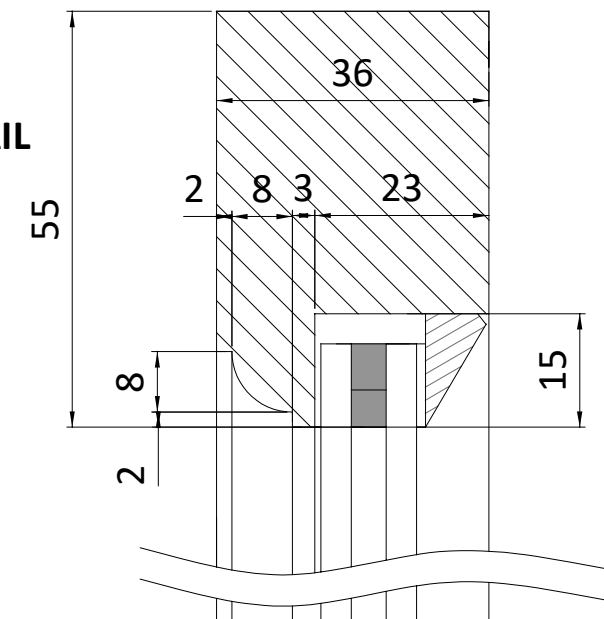
**HORIZONTAL SECTION
THROUGH STILE AND
GLAZING BAR
SCALE 1:1**

15
23
8 3
2
8 2
55
4
24
55
36
105
95
36

CHAMFERED ON SITE
TO SUIT CILL