



ASSUMED CONSTRUCTION SEQUENCE


① EXISTING

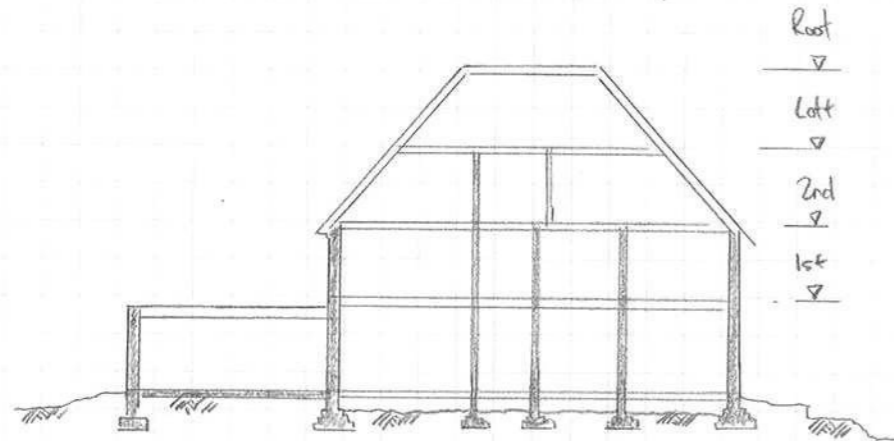


② REMOVE REAR EXTENSION, TERRACE & GROUND FLOOR CONSTRUCTION INSTALLING LATERAL PROPS PRIOR TO REMOVAL

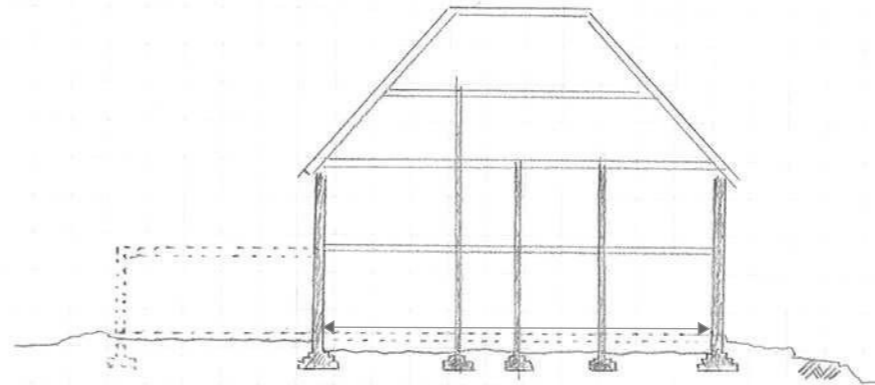


③ INSTALL UNDERPINS, NEW STRAP FOOTINGS & PILING MAT

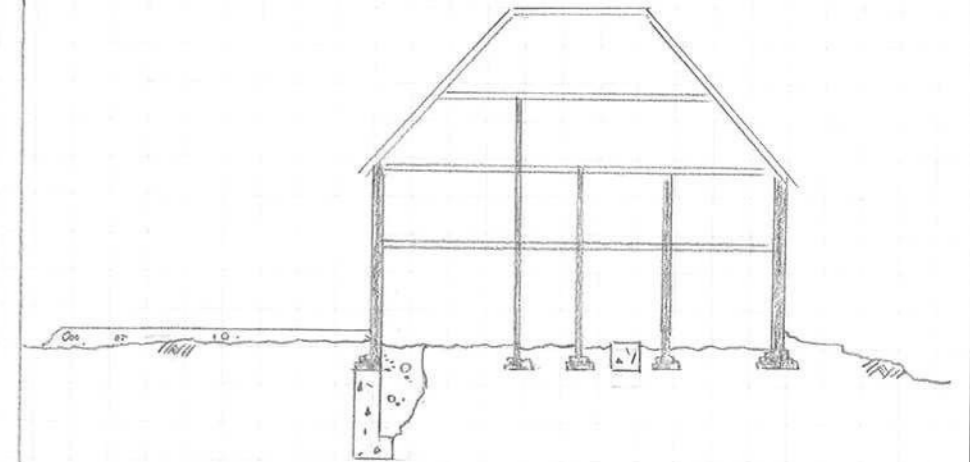


④ INSTALL PILES, TEMPORARY FOOTINGS & PLOPPING. EXTERNAL WALLS & ROOF. REMOVE UPPER FLOOR CONSTRUCTION & INTERNAL WALLS FROM TOP DOWN

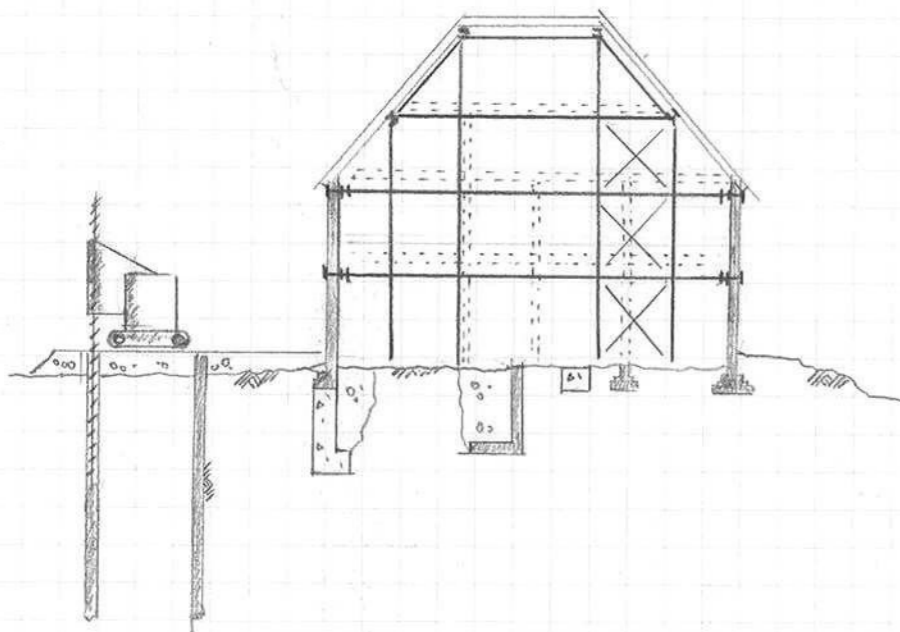


⑤ EXCAVATE BASEMENT, INSTALL TEMPORARY BRACING AS EXCAVATION PROGRESSES. INSTALL GROUND BEAMS TO REAR EXTENSION

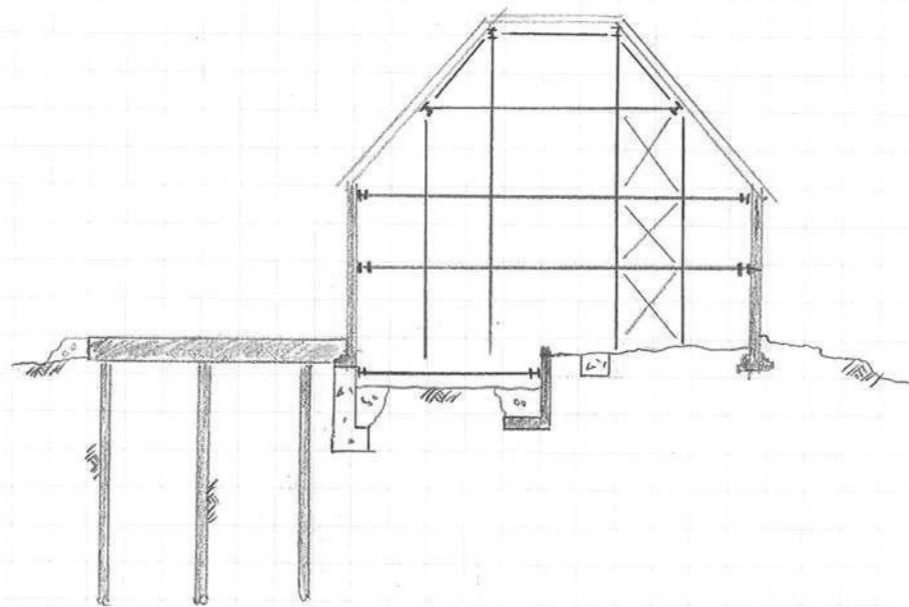

⑥ INSTALL BASEMENT SLAB, RC LINE WALL TO MASS CONCRETE UNDERPINS, REAR EXTENSION SLAB

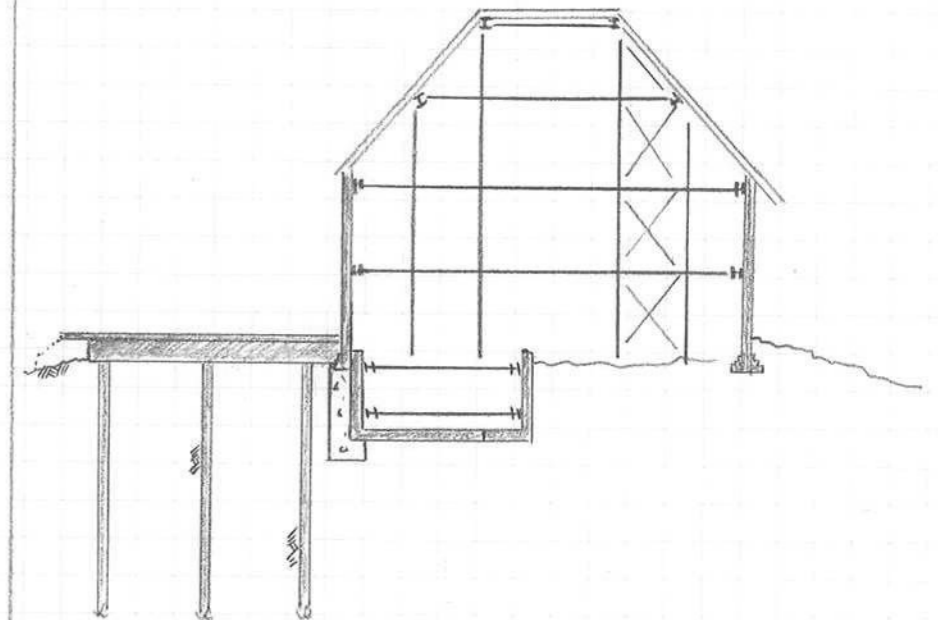

⑦ INSTALL GROUND FLOOR SLAB TO BASEMENT. ERECT
SECWORK

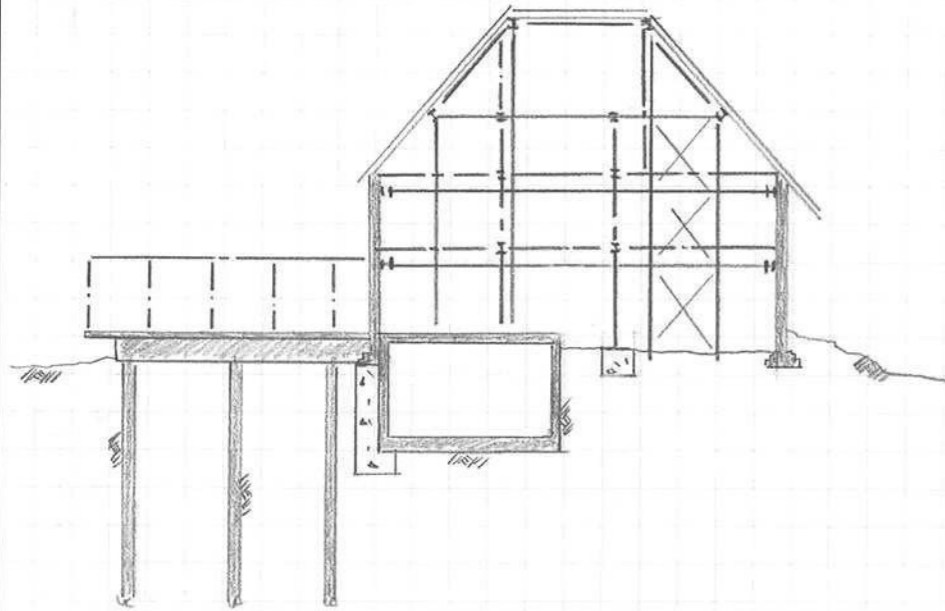

⑧ INSTALL FLOORS & REMOVE TEMPORARY PROPPING

