

AS WELL AS PROVIDING THE ULTIMATE IN SPORTS FENCING,
WE CAN ALSO SUPPLY THE FOLLOWING FINE PRODUCTS...



Robust security fencing also available with cranked tops & barbed wire.



Gemini arched top fencing for housing & prestige projects



Unobtrusive fencing for parks & schools.



Secure enclosures



Secure perimeter fencing of industry



Range of strong & elegant railing systems



Zaun Limited

PO Box 5573, Birmingham, B1 1HG

Tel: 0121 628 5551 Fax: 0121 628 5552 Email: sales@zaun.co.uk Web: www.zaun.co.uk

Registered in Great Britain No. 3275214

PE9800823

For Info



- EXTREMELY STRONG & RIGID ●
- SOUND INSULATING FIXTURES ●
- GOOD THROUGH VISIBILITY ●
- EASY TO INSTALL ●
- SAFE, NO PROTRUDING SHARPS ●
- ATTRACTIVE ●
- LONG SERVICE LIFE ●
- MATCHING GATES & ACCESSORIES ●
- VALUE FOR MONEY ●


THE ULTIMATE IN SPORTS FENCING

INTRODUCTION

Zaun Ball Court Fencing provides a design tailored for sports enclosures. Twin horizontal 8mm wires ensure vital resistance to deformation from impacts and vandalism, they give the panels a structural strength far greater than the sum of their components and impart a degree of rigidity unparalleled by any other wire product commonly available. Weld strength is not compromised by utilising pre-galvanised wire, all our products are hot dip galvanised after resistance welding each and every joint to ensure maximum strength and life cycle. The panels have been proven to withstand the most demanding applications and can even be used as an alternative to netting in goals. Installations have a simple and elegant appearance, there is no need for the untidy "line wires" or "cable ties" used by many other manufacturers. With Zaun the strength is in an integral feature of the panel.

Care has also been taken to develop a post to satisfy the demands and safety considerations of sports

enclosures. Special clamps are factory fitted along the length of the posts, not only providing a positive location for the panels but insulating the components, thus dampening rattle from impacts and wind to a minimum. A continuous clamp bar completely covers the ends of the panels so that clothing can not snag, the mounting bolts have smooth heads and blind threads eliminate any protruding threads/nuts on either side of the fence. The amazing strength of the panels combined with carefully designed posts, culminate in the ideal sports fence, practical and elegant.

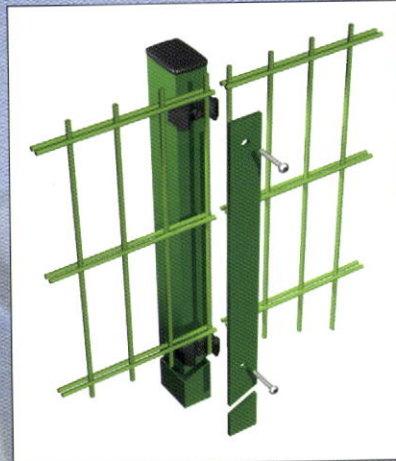

SPECIFICATION

- Post centres 2.52m
- Heights : 0.63 - 6.08m,
- Mesh 50 x 200mm
- Wire sizes, vertical 6mm, 2 x horizontal 8mm or 2 x horizontal 6mm
- Every joint resistance welded before hot dip galvanising, ensuring strong welds and corrosion resistance
- Posts constructed from Rectangular Hollow Section (RHS) with continuous clamp-bars and tamper resistant fasteners. Post section sized to suit height and location.
- Panels positioned on posts with special mounts, which insulate the panels from the posts reducing noise and vibration.
- Adjoining panels are butted together, not overlapped, thus providing a particularly straight fence line.

INSTALLATION

Installation of the system is straightforward and quick - with the posts set, the panels are located on factory fitted mounts spaced along the length of the post. The mounts ensure that the panels are square and aligned with the adjacent bays. The panel will hang from the mounts, leaving the installer's hands free to secure the continuous clamp-bar. Special tools to suit the tamper resistant fasteners are supplied for quick use with power tools. Adjacent bays can be stepped simply by positioning the panels behind the clamp-bars as required. There are no straining wires, no tensioning and no ties required, the inherent rigidity of the twin wire system will produce an exceptionally straight fence line.

COLOUR RANGE

In addition to standard colours, Zaun Ball Court Fencing is also available in any colour from the RAL range.

BRITISH STANDARDS

Zaun Ball Court Fencing is manufactured with quality in mind. All steel items are hot dip galvanised to BS729 and polyester powder coatings are applied to BS6497. All components comply with BS1722.



4m high full height, double leaf gate

Gates available in the following standard widths
Single Leaf 1m, 1.2m, 1.8m, 2m
Double Leaf 2m, 3m, 4m, 5m
 All available either full height or with overpanel.
 Other sizes available upon request.



Kickboard fixings available in a number heights.

1m wide, single leaf gate with self-closing mechanism & over panel




Corner detail produces a neat, strong solution

Simple goal panel. Anti tamper screws are standard on entire range. Requiring a special tool for removal.



Strong & safe hand rail

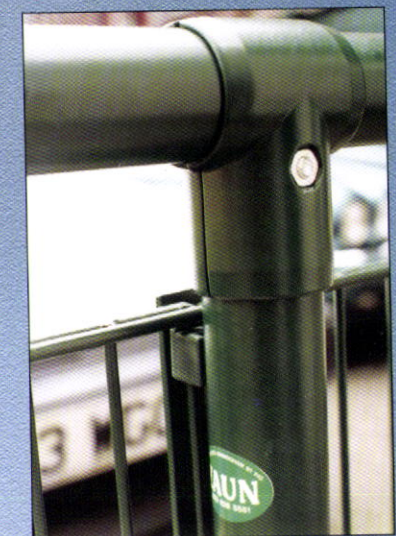


Cranked top panels for enhanced ball retention. Wall mounted posts.



**ATTENTION TO DETAIL
 AND A RANGE OF
 OPTIONAL EXTRAS TO GIVE
 YOU THE SYSTEM YOU WANT**

COPYRIGHT © 1998, ZAUN LIMITED, BIRMINGHAM, ENGLAND

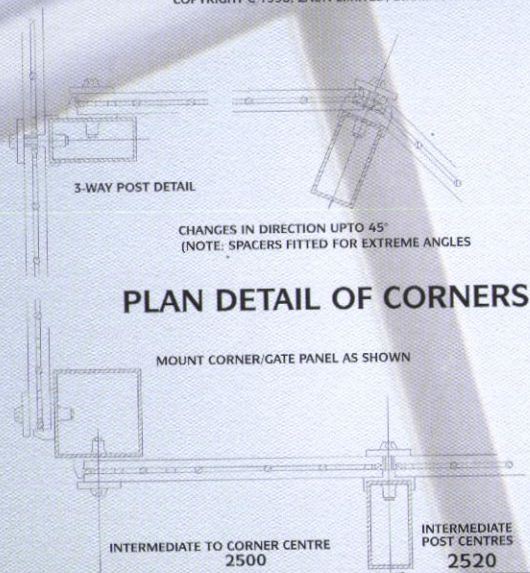

ZAUN
 COLOUR RANGE

GREEN - RAL 6005

RED - RAL 3000

BLACK - RAL 9005

BROWN - RAL 8019

BLUE - RAL 5010

8010