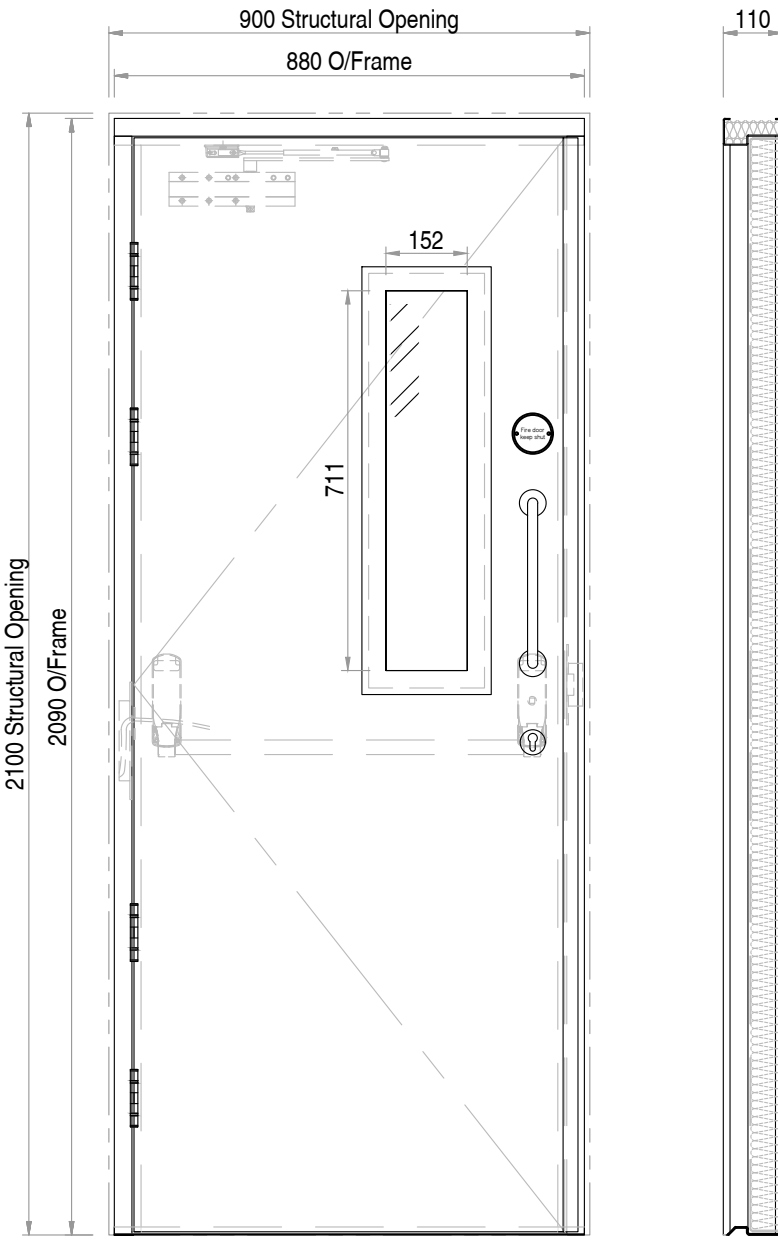





E	<p>Unless stated otherwise, all dimensions shown are in millimeters.</p>  <p>1st Angle Projection</p>	<p>Designs are subject to change and is the responsibility of the client to check with the manufacturer before preparing openings.</p> <p>Requests for the raw file of this drawing may be granted, however extra information not shown on release format (PDF) obtained from raw file that is not checked with the manufacturer will not be accepted as information released for customer use by the manufacturer.</p>		Title MD16610 - Bloomsbury Quarter	Drawing No. 104316-4	Drawn JT
					Date 05/09/2024	Size A4

	1	2	3	4	5	6	7		
A					<p>B - DS01-01/02 - DS02-01 - DS03-03 - DS04-01 - DS05-01 - DS06-01 7no. Single-leaf steel hinged doorsets:</p> <ul style="list-style-type: none">* To suit a structural opening of 900 x 2100mm WxH* Overall frame size of 880 x 2090mm WxH* Telescopic side frame system* Heavy duty door leaf with astragal - 1.5mm thick galvanised steel skin c/w Rockwool core* Heavy duty 2mm galvanised steel single rebate frame* Weatherseals* Stainless steel hinges c/w hinge bolts* Chamfered low profile stainless steel threshold - DDA compliant* Fire Rating: E60s* Thermal upgrade - reduced U value of 1.5W/m²K - upgrade to 110mm single rebate frame* Insulated Frames* 60mm Door Leaf* Emergency escape push bar panic latch with euro cylinder c/w microswitch Exidor 305MS/SD* Fail safe/secure medium duty electric strike - monitored* Concealed door loop with internal conduit* Single 45mm euro cylinder c/w 3 keys* Escutcheon - 47mm self adhesive - SS* Pull handle on rose 300x19mm SSS mounted from 1070mm to 1370mm FFL to external side* Surface mounted steel fire door closer Size 2-5 Silver c/w adj backcheck* Vision panel high security 152x711mm WxH* Glass - 13mm Pyroguard T EW120 - 120mins* Sign - Fire Door Keep Shut - 76mm dia SS mounted to leading edge at 1500mm FFL to both sides* Single door finished in polyester powder coat to RAL* Outward opening* Left hand hinged - Handing to be confirmed (viewed from the 'pull to open' side)* Fixing Kit for Masonry - Concrete Screws/SDS Drill Bit/T30 Torx Driver Bit				
B									
C									
D									
E	<p>Unless stated otherwise, all dimensions shown are in millimeters.</p>  <p>1st Angle Projection</p>		<p>Designs are subject to change and is the responsibility of the client to check with the manufacturer before preparing openings.</p> <p>Requests for the raw file of this drawing may be granted, however extra information not shown on release format (PDF) obtained from raw file that is not checked with the manufacturer will not be accepted as information released for customer use by the manufacturer.</p>				<p>Title</p> <p>MD16610 - Bloomsbury Quarter</p>	<p>Drawing No.</p> <p>104316-4</p> <p>Date</p> <p>05/09/2024</p>	<p>Drawn</p> <p>JT</p> <p>Size</p> <p>A4</p>