


sett paving: Tegula sett paving,  
colour and type to Client specification  
[supplier: Marshalls]

sub-base course tbc: 100mm  
minimum compacted and blinded non  
frost-susceptible M o T Type 1  
granular material, suitable for  
pedestrian areas

geotextile: Terram 1000 or similar  
non-woven geotextile

sub-grade: to be suitable material for  
footpath construction

Steel edge:  
galvanised 100 x 100mm angle  
[supplier tbc] In situ concrete  
foundation to supplier's specification.

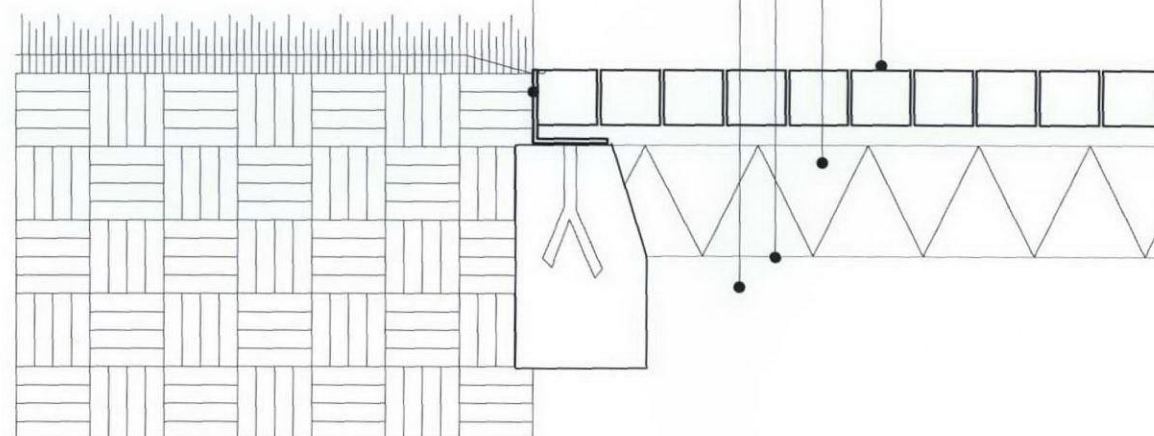

#### notes

Drawing to be read in conjunction with  
Hard Landscape and Planting drawings FL\_WAI\_P\_001  
to FL\_WAI\_P\_016, Specification for Planting Works  
FL\_WAI\_spec\_001, Schedule of Plants FL\_WAI\_S\_010  
and Detail Drawings FL\_WAI\_D\_01 to FL\_WAI\_D\_10.  
Do not scale from this drawing.  
All measurements to be checked on site.

#### revisions

a: Amendment to sett paving specification. 16.10.12

Waites Houses | detail drawing 08  
sett paving section: showing metal edge

september 2011 | 1:10 @ a3 | FL\_WAI\_D\_08\_reva

**FORUM** landscape architects

74 Linzee Road London N8 7RE :+44(0)20 8341 1411  
mail@forumlandscape.co.uk www.forumlandscape.co.uk