

**NOTES**  
Designs are carried out in accordance with temporary works codes BS EN 12810, 12811 and 12812 together with BS EN 1991, 1993 AND 1999. Where these codes are incomplete, the previous British Standards have been incorporated including BS 5973, 5974 and 5975 together with BS 5950 and BS 8118.

Scaffold to be loaded as General purpose.

Handrails, guardrails and toeboards must be erected around all working or access platforms where there is a risk of fall or injury.

All dimensions are in mm.

All scaffolding is to be erected in accordance with the Work at Height Regulations 2005 (HSE).





All fixed couplers are to be to EN 12811-1 Table C1 Class B couplers.

All bracing to be installed as shown.

All the scaffold is to be earth bonded to the earth side of the OLE support towers by appropriate persons prior to handback of C permit and isolation.

Minimum vertical clearance from OLE to soffit of 600mm to be maintained at all times in accordance with table B4.6.2 Electrical clearances in Network Rail - Railway Group Standards GERT/8025.

Hoarding to be erected in accordance with document NR/L3/OCS/044-R-11, Worksite protection & Temporary Hoardings

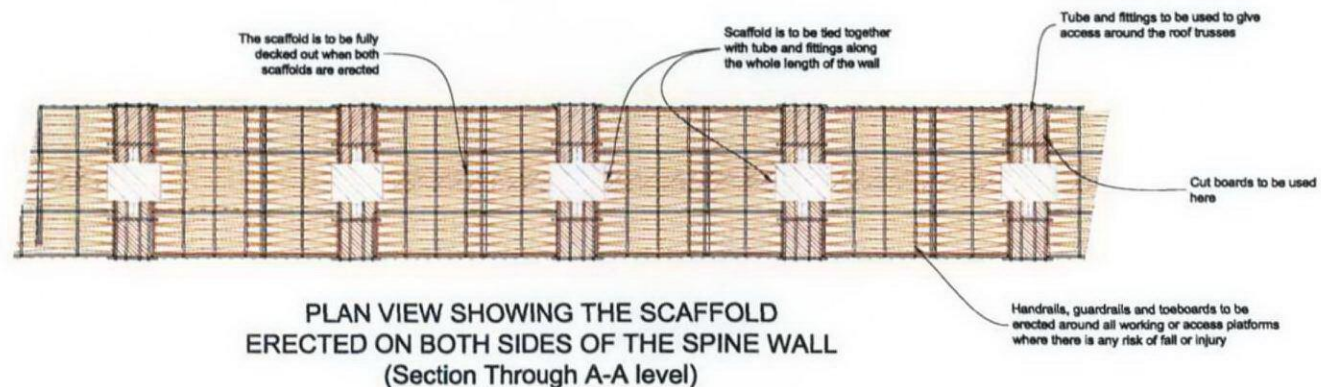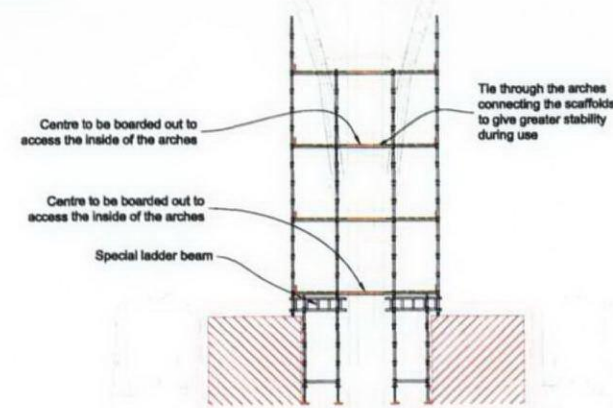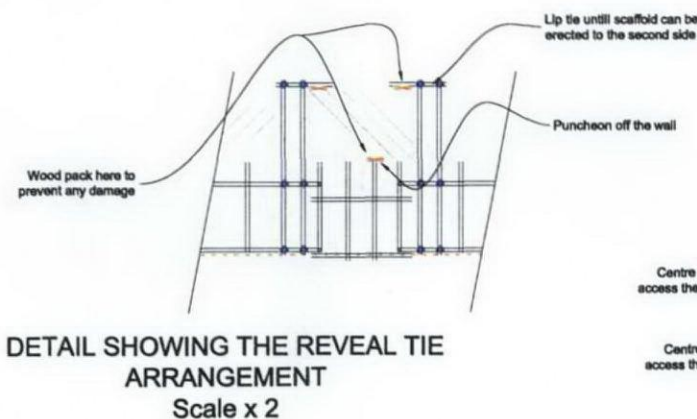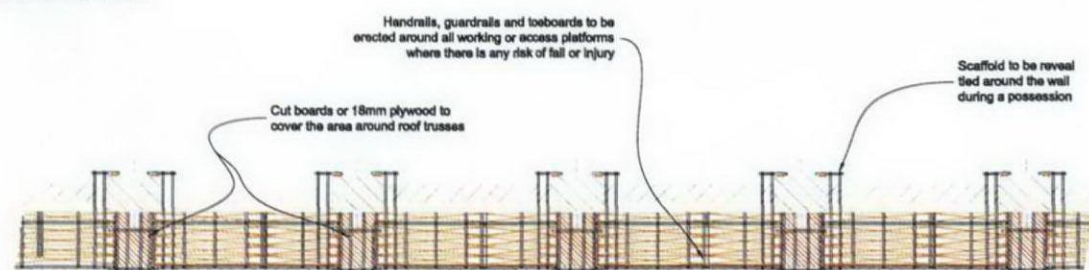

Engineering Design Services International Ltd.  
Unit 17, Evans Business Centre, Dane street, Rochdale OL12 6XB  
Tel: +44 (0)1706 343 933 Fax: +44 (0)1706 525 080 E-mail: projects@edsi.co.uk  
Registered in England and Wales No. 5901632  
Intellectual property rights retained & Copyright retained ©

Client:- NSS (SA) Ltd.

Contract:- Kings Cross Station, London

Title:- Central wall access scaffold  
General arrangement

Dwg: P0010-02-DGA-01-C Scale @ A1: 1:100

Auth'd	date	Chkr	date	Eng	date	Drn	date	Description	rev
George	20090617							Modified as per clients comments	C
Luke	20090603							Hoarding information added	B
Luke	20090512							Design continued by Luke	A
Zhe	20090429							Changed to Cuplok	A
Luke	20090312							Original	-



**engineering design services**  
**EDS international Ltd**