



[Home](#) > [Products](#) > [City Multi \(VRF\)](#) > [Outdoor](#) > [R410A Mini VRF Heat Pump](#) >

PUMY-P100YHMA Y Series 4hp Outdoor Unit

R410A Heat Pump

The latest in Mitsubishi Electric Y Series technology incorporated within the new City Multi 4hp model allows up to 6 indoor units to be connected to a single outdoor unit, using the standard branch/header pipework system proven in the larger models. Utilising the latest Mitsubishi Electric Inverter technology, the system is fully controllable with all City Multi controllers or linked to third party BEMS.



Model Info



- * A two core non-polar transmission line allows for simple installation of up to 6 indoor units
- * The condensing unit is extremely slimline which allows easy location and application of the system

Hover your mouse over the red icons below to view a description of each feature:




PUMY-P100YHMA

Capacity (kW):	
Heating (Nominal)	12.5
Cooling (Nominal)	11.2
Heating (UK)	10.4
Cooling (UK)	10.3
Power Input (kW) Heating (Nominal)	3.63
Power Input (kW) Cooling (Nominal)	3.3
Power Input (kW) Heating (UK)	3.23
Power Input (kW) Cooling (UK)	2.81
Max No. of Connectable Indoor Units	6
Airflow(m ³ /min) (Heating /Cooling)	100 /100
Noise (dBA) (Heating/Cooling)	51/49
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)

Dimensions

PUMY-P100YHMA (Click to [\[Print\]](#) enlarge).

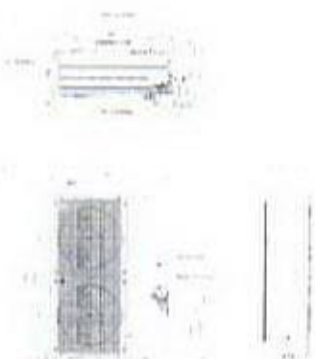



[Home](#) > [Products](#) > [Mr Slim](#) > [Wall Mounted System](#) > [R410A Power Inverter Heat Pump \(Single Phase\)](#) >

PUHZ-RP100VHA3 R410A Power Inverter Heat Pump (Single Phase) (10.0kW)

PUHZ-RP100VHA3 POWER INVERTER R410A

Model Info



Hover your mouse over the red icons below to view a description of each feature:




PUHZ-RP100VHA3

Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	116
Noise (dBA) (Heating /Cooling)	51 /49
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	220-240v, 50Hz
Phase	Single
Fuse Rating (BS88) - HRC (A)	32
Interconnecting Cable No. Cores	4
Mains Cable No. Cores	3
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge (kg) - 30m	5

Powered by [Enable Software](#)

Dimensions

PUHZ-RP100VHA3 (Click to [\[Print\]](#) enlarge).

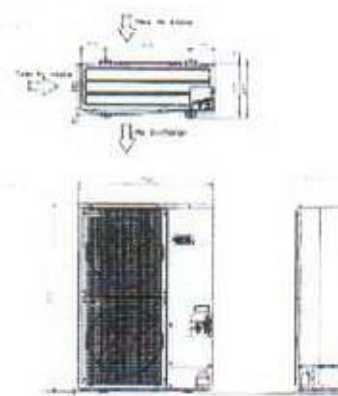



[Home](#) > [Products](#) > [Mr Slim](#) > [Stainless Steel Ceiling Suspended System](#) > [R410A Power Inverter Heat Pump \(3 Phase\)](#) >

PUHZ-RP125YHA2 R410A Power Inverter Heat Pump (3 Phase) (12.5kW)

PUHZ-RP125YHA2 Power Inverter R410A

Model Info



Hover your mouse over the red icons below to view a description of each feature:



PUHZ-RP125YHA2

Width - mm	950
Depth - mm	330 + 30
Height - mm	1350
Weight - kg	130
Noise (dBA) (Heating /Cooling)	52 /50
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	16
Interconnecting Cable No. Cores	4
Mains Cable No. Cores	5
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge (kg) - 30m	5

Powered by [Enable Software](#)

Dimensions

PUHZ-RP125YHA2 (Click to [Print](#) enlarge).

