



TUBULAR STEEL FLOODLIGHTING COLUMNS




1 FLOODLIGHT

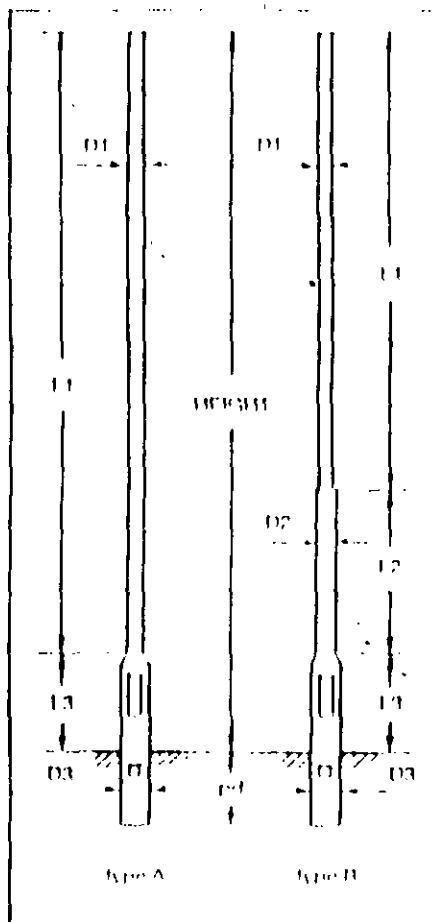

2 FLOODLIGHTS




3 FLOODLIGHTS




4 FLOODLIGHTS


PL/9201150




5 FLOODLIGHTS



6 FLOODLIGHTS



7 FLOODLIGHTS



8 FLOODLIGHTS

All Floodlight Columns are manufactured from Steel equivalent to BS 4360 Grade 50C.

Double or Triple Door Openings are also available.

Bolted Slip Joints can be offered on all Type 'B' Floodlight Columns.

All Floodlight Columns can be supplied with Planted Bolt or Flange Plate Fixing.

Various additional fittings can be supplied i.e. Floodlight Support Arms, Climbing Steps.


Column Ref.	Nominal Height	Max No Floodlights	Pole Type	P.D. mm.	L1 mm.	L2 mm.	L3 mm.	D1 mm.	D2 mm.	D3 mm.
04MF/2	4	2	A	600	3000		1000	76.1		139.7
5MF/2	5	2	A	800	4000		1000	76.1		139.7
06MF/3	6	3	A	1000	5000		1000	76.1		139.7
08MF/3	8	3	A	1200	6350		1650	114.3		168.3
08MF/6	8	6	A	1200	6350		1650	114.3		168.3
10MF/3	10	3	A	1500	8350		1650	114.3		168.3
10MF/6	10	6	A	1500	8350		1650	114.3		168.3
12MF/3	12	3	A	1700	10350		1650	139.7		193.7
12MF/6	12	6	A	1700	10350		1650	139.7		219.1
14MF/3	14	3	B	2000	10350	2000	1650	139.7	168.3	219.1
14MF/6	14	6	B	2200	10350	2000	1650	139.7	168.3	219.1
16MF/6	16	6	B	2200	10350	4000	1650	139.7	193.7	273.0
18MF/6	18	6	B	2200	10350	6000	1650	139.7	193.7	273.0
20MF/8	20	8	B	2500	10350	8000	1650	139.7	193.7	273.0

LONDON BOROUGH OF CAMDEN
TOWN AND COUNTRY PLANNING ACTS
19 NOV 1992

PLANS APPROVED

MAVROLITE

Mavrolite
73, Parkside Road,
Birmingham B20 1EJ
Telephone 021 357 3986
Fax: 021 554 5085



SCEPTRE 3



Description

A range of Floodlights complete with fixing brackets from 70w to 400w. Available in High Pressure Sodium, Metal Halide and Mercury Vapour.

Please note these variations are not available in all wattages.

For further details please see ordering references.

Applications

Sports halls, car-parks, tennis courts, gardens etc.

Variations

Metal halide and mercury vapour are available in 250w and 400w versions.

Please refer to Head office for further details.

Specifications

Cast aluminium bodies with glass fronts, to IP54 rating. All models supplied including lamp.


Export

As for UK market.

Photometric Data

Please see page 94.

ORDERING DATA



IP classification symbols



ORDERING REFERENCE	LAMPS	"A" OVERALL LENGTH (MM)	"B" WIDTH (MM)	"F" FIXING CENTRES (MM)	"C" HEIGHT (MM)	WEIGHT (KG)
SRF70S	1 X 70W SON	400.00	330.00	150.00	410.00	8.00
SRF150S	1 X 150W SON	400.00	330.00	150.00	410.00	6.00
SRF250S	1 X 250W SON	400.00	330.00	150.00	410.00	8.00
SRF400S	1 X 400W SON	400.00	330.00	150.00	410.00	10.30
SRF250MBF	1 X 250W MBF	400.00	330.00	150.00	410.00	6.00
SRF250MBI	1 X 250W MBI	400.00	330.00	150.00	410.00	6.00
SRF400MBI	1 X 400W MBI	400.00	330.00	150.00	410.00	10.30

* (All above complete with control gear).

PL/ 9201150
4000000

LONDON BOROUGH OF CAMDEN
TOWN AND COUNTRY PLANNING ACTS

19 NOV 1992

PLANS APPROVED
ON BEHALF OF THE COUNCIL