
DO NOT SCALE REPORT ERRORS AND OMISSIONS TO THE ARCHITECT CHECK ALL DIMENSIONS BEFORE FABRICATION

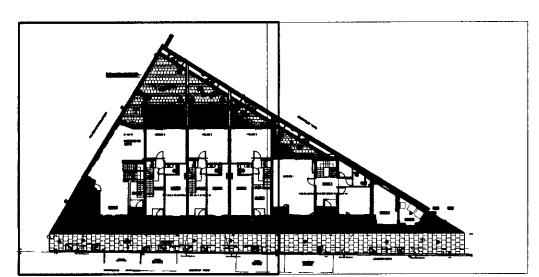

SEE DRAWING 07.187/601

- Framless glass balustrading to 'bridge link' with stainless steel handrail to top. Mesh floor . See
- (2) Framless glass balustrading with stainless steel handrail to top and stainless steel edge plate to base. See drawing 655
- 3 planter and seating. See drawing 650
- Soft landscaping. See drawing 650.
- (5) Garden wall. 215mm thick brick K10/360 2000mm high above ext. FFL on highest side with ppc aluminium coping to top on DPC bed, F30/780. Polymer based render finish, spec M21.
- (6) Rear garden paving. Marshalls 50mm thick fiamed granite pavers, colour Light Beige, laid in staggered bond of 200x600 and 400x600 pavers with 5mm wide white 4:1 sand cement mortar joints. Paving laid on 25mm thick bed of 3:1 sand cement mbx on 150mm min compacted hardcore bed. Perimeter 150mm wide x 75mm deep pea shingle on 150mm min compacted hardcore bed. See drawing 650
- Front paving. 100x100x100mm thick cropped granite setts by Marshalls, colour Mid Grey, 5-8 mm wide light grey 4:1 sand cement mortar joints. Paving laid on 25mm thick bed of 3:1 sand cement mix on MOT type 1 compacted hardcore
- 8 Paving to lightwells. 100x100x100mm thick flamed granite setts by Marshalls, colour Light Grey, 5-8 mm light grey 4:1 sand cement mortar joints. Paving laid on 25mm min thick bed of 3:1 sand laid to falls to gullies. Perimeter of 150mm wide x 75mm deep pea
- (9) Steps: Marshalls Conversation step. Silver grey 255mm wide. Cut to suit falls. See sketch
- Cycle stands: bike stand, Autopa Ltd Sheffield Style toastrack. Galvanised ref 138200304.
- 12) Trellis: See drawing 650.
- New Garden Party Well to All Souls: SEE PARTY WALL AWARD AND WHITBYBIRD INFORMATION. & drawing 212.
- New low level wall and railings: 215mm thick brick wall, F10/110A, 450mm high above FFL brick on edge plinth. Stainless steel handrall 450mm above plinth with stainless steel balustrading flat plates @ less than 100 centres. Countersunk fixings.
- New 900mmhigh x1100mmwide Stainles steel gate to match design of railings. With stainless steel slide surface barrel bolt.
- New paving beyond boundary to public highway To comply with London Borough of Camden
 Highway standards. Remove existing crossovers
 and paving and kerbs and install new.
- 17) Drainage to road interface:Marshalls Slot Mono drain with Marshalls Base channel unit . For detail design see Str.Eng specification.
- O Bollard: Furnitubes Ltd (tel 02083783200) Wharf bollard, Satin Stainless steel finish WHA 452, fixed to concrete haunched footing.

150 LOUDOUN ROAD

CHECKED DR

9CALE 1:50 @A1

13.08.07

external works GA plan 07.187 / 600 House 2 to 5



TO BE REMOVED

ATP Group
Architects & Building Surveyors
Brook House Coventry Road Ilford Essex IG1 4QR
T 020 8532 4141 F 020 8532 4140 E atp.ilford@atpgroup.co.uk