



# Tudor Roof Tile Co. Limited

Dengemarsh Road, Lydd, Kent TN29 9JH

Telephone: 01797 320202 • Facsimile: 01797 320700

[www.tudorrooftiles.co.uk](http://www.tudorrooftiles.co.uk) • email: [info@tudorrooftiles.co.uk](mailto:info@tudorrooftiles.co.uk)



Our 'Traditional' range of handmade Plain Tiles (nibbed) exhibit a larger degree of double camber and capture the character and much sought after aesthetic qualities of older reclaimed tiles.

Our 'Traditional' handmade Peg Tiles and Oast Tiles are less cambered, and better complement restoration and preservation projects.

New for 2015 is the inclusion of the 'Romney' range of roof tiles. With their gentle camber and fine textured sand face, Romney roof tiles are perfect for town and city roofs alike.

## Technical Specifications

DIMENSIONS (metric (mm)) (Imperial (inches))  
(variable to avoid straight lines on roof)

<b>Plain Tiles</b> (nibbed)	265 x 165	10.5 x 6.5
<b>Plain Peg Tiles</b>	255 x 160	10 x 6
<b>Ornamentals</b>	265 x 165	10.5 x 6.5
<b>Oast Tapers</b>	255 x 150 reducing to 120mm or 85mm (Two Tapers, Wide & Narrow)	

### Fittings

Ridges - all types	300 Long	12 Long
External & Internal Angles (90 degree)	265 Long	10.5 Long

### Lap (minimum)

Plain Tile & Peg Tile	65	2.5
-----------------------	----	-----

### Gauge (maximum)

Plain Tile	100	4
Plain Peg	95	3.75

### Roof Pitch

BS5534:2014 Recommended Minimum - 40°

### Covering Capacity

Plain Tile	60 Tiles / metre <sup>2</sup>
Plain Peg Tile	66 Tiles / metre <sup>2</sup>

### Laid Weight (Average)

Plain Tile	75kg / metre <sup>2</sup>	15.36lbs / feet <sup>2</sup>
Plain Peg Tile	75.9kg / metre <sup>2</sup>	15.55lbs / feet <sup>2</sup>

### Transverse Strength

780 newtons

### Ventilation Tiles / Systems

Half Round Vented Ridge (eyebrow)	Area
Hog's Back Vented Ridge (eyebrow)	2580mm <sup>2</sup> / 4 inches <sup>2</sup>
Invisible Under Tile Vent System	2580mm <sup>2</sup> / 4 inches <sup>2</sup>
In-Tile Vent System	9000mm <sup>2</sup> / 14 inches <sup>2</sup>
	6000mm <sup>2</sup> / 9.3 inches <sup>2</sup>

### Packaging

Plain Tiles are banded in tens for ease of handling on site and shrink wrapped on non returnable pallets of 1000

### Weight

per 1000 Plain Tiles - 1.25 Tonnes average

E & O.E



*Medium Antique*



*Dark Antique*



*Red Antique*




*Sussex Brown*



*Sussex Red*




*Jubilee*

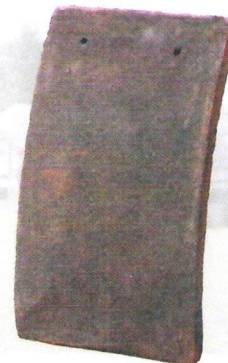

*Weathered Earth*



*Romney  
Russet Brown*

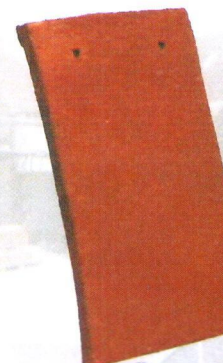


*Romney  
Rustic Red*



*Romney  
Rural Grey*



# Our basic range of Fittings and Ornamental Tiles

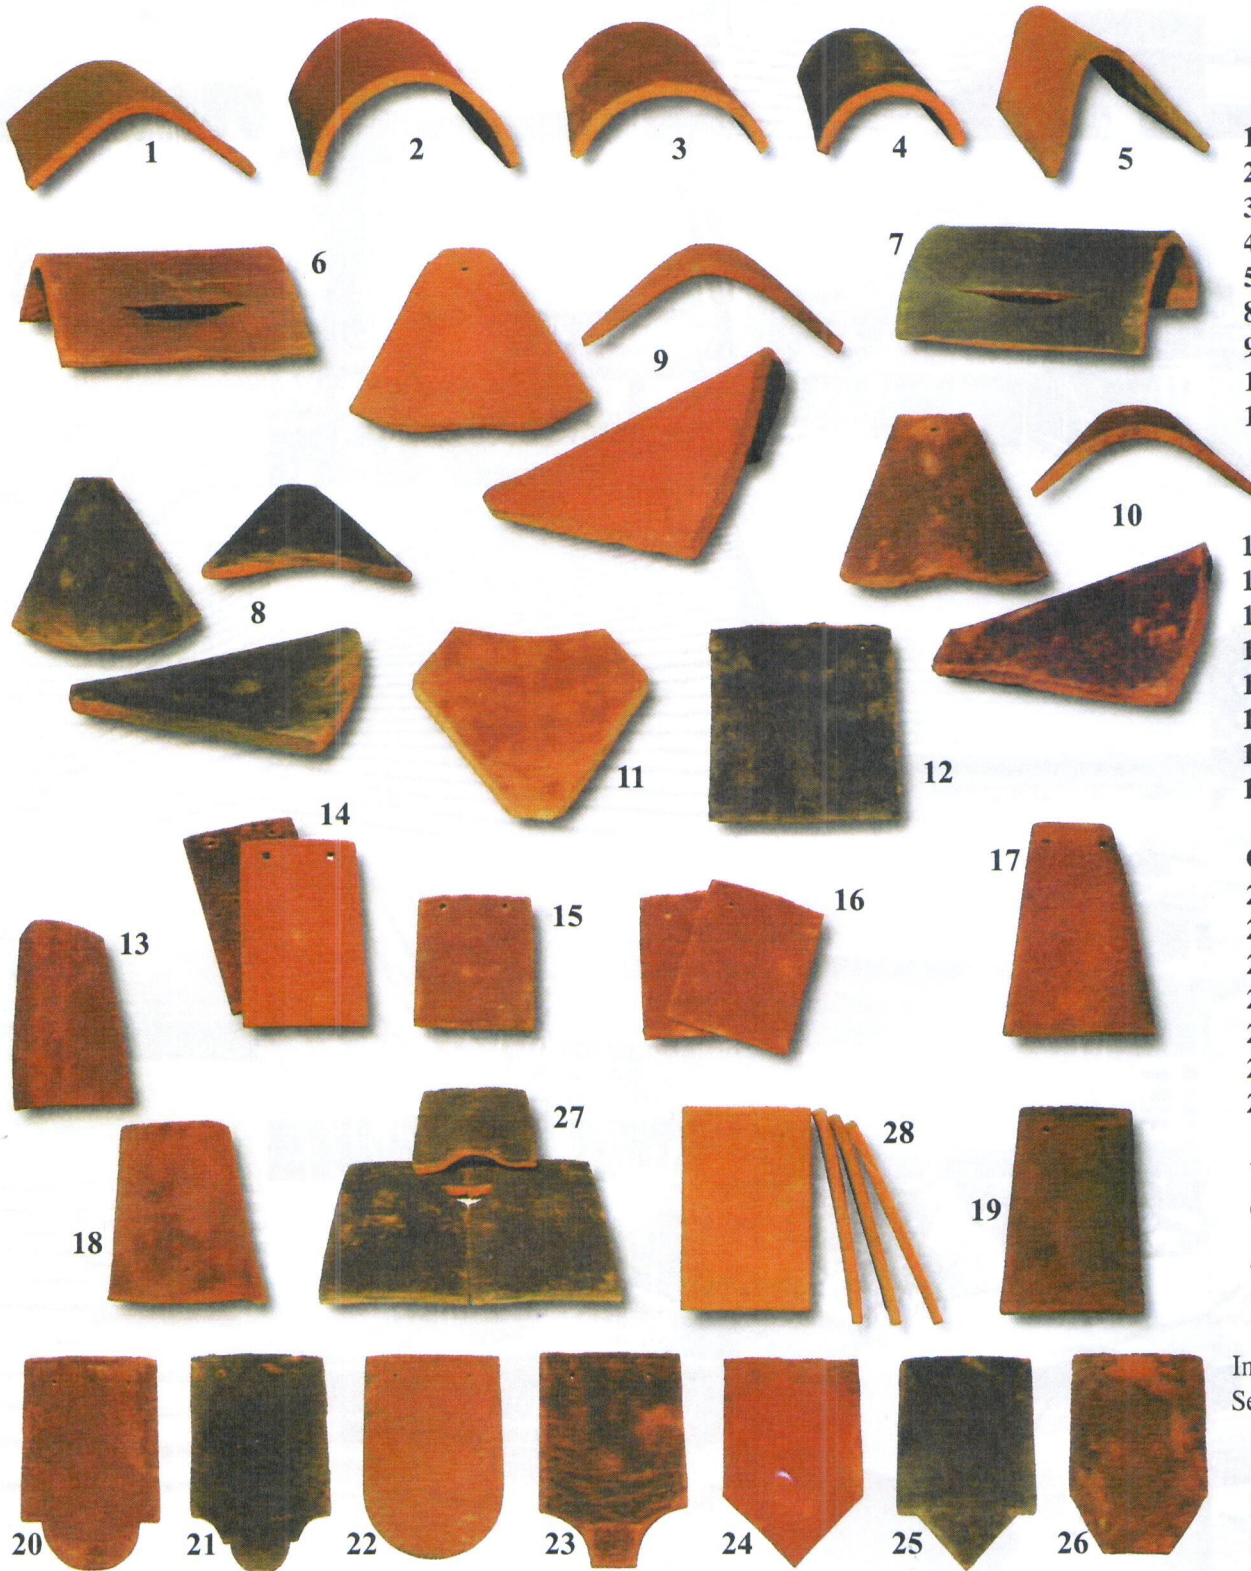

## Key

- 1 Hog's Back Ridge
- 2 Half Round Ridge
- 3 Third Round Ridge
- 4 Baby Ridge
- 5 Mono Ridge
- 8 Sussex Hip
- 9 Bonnet Hip
- 10 Kent Hip
- 11 Universal Valley

- 12 Gable Tile
- 13 External Angle
- 14 Peg Tile
- 15 Peg Eave
- 16 Eave and Top Tiles
- 17 Oast Taper-Narrow
- 18 Internal Angle
- 19 Oast Taper-Wide

## Ornamental Tiles

- 20 Club
- 21 D.S. Club
- 22 Bullnose
- 23 Fishtail
- 24 Arrowhead
- 25 Diamond
- 26 Snubnose


## Ventilation

- 6 Hog's Back Vented Ridge
- 7 Half Round Vented Ridge
- also (not illustrated)  
Invisible Under-Tile Ven  
Semi-Visible In-Tile Ven

## Specialist Tiles

- 27 Bat Access Set
- 28 Creasing Tiles

Or do you need roof tiles in *your* bespoke size?

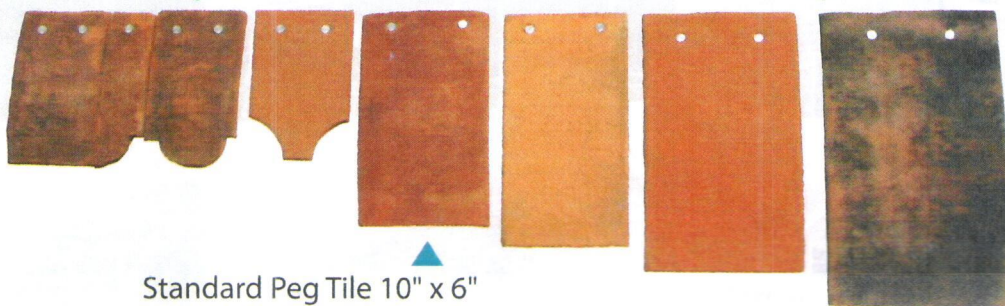

Standard Peg Tile 10" x 6"

*Talk to us about  
your  
bespoke  
requirements*