

Scale bar for verification only

NOTES: LEGEND ——— Exposed pipework to lower ground floor ceiling Pipework from/to existing & new risers within floor void Electrical cabling from/to existing & new risers within floor void Existing riser/opening in floor to be retained or stripped-out - refer to detailed notes on drawing New riser/opening in floor Floor mounted VRF unit within bespoke joinery housing. For VRF sizes refer to drawing RS_5_J_61 Existing joists within floor Existing beams within floor Layout of existing walls to be removed ER Electrical riser. Mechanical riser. Note: Beam and joist locations are assumed and are to be confirmed with an on site survey prior to construction. The drawing is to be read in conjunction with PRS Heritage Significance drawings (HW-series drawings); Alan Baxter structural drawings and Frankham services drawings. The services distribution strategy is to avoid altering the existing fabric by re-using existing services routes and notches where possible. Elsewhere the integration of new services will aim to work with the grain

floor joists and with careful coordination of the routes to limit notching to existing joists. Where new notches are required these will be agreed by the LB Camden

of the existing structure by passing services between existing timber


All horizontal distribution of pipework to not be larger than 13mm in diameter. No insulation to run through floor timber structure.

Pipework dimensions are as follows:


Conservation Officer.

1.No 24mm ø pipe including insulation (6.5 ø RF pipe to VRF) 1.No 31mm ø pipe including insulation (13 ø RF pipe to VRF)

All redundant services openings will be made good.

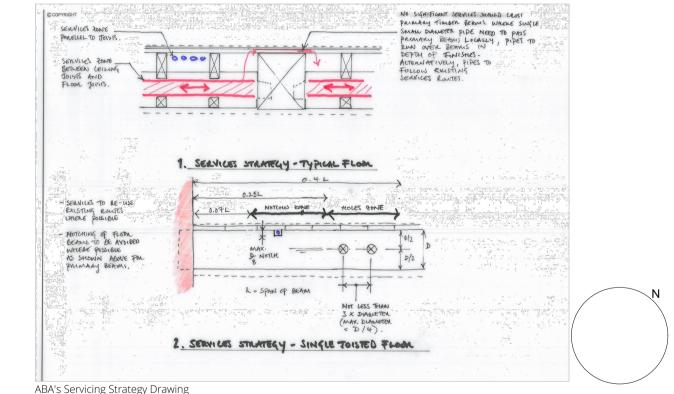

ABA's Servicing Strategy Drawing

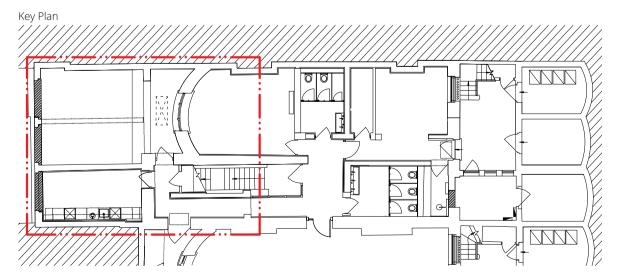

FOR PLANNING

Droingt Dof	42 42 DUCCEU COUADE			
Project Ref:	42-43 RUSSELL SQUARE			
Subject :	LOWER FLOOR PLAN: 42RS PROPOSED SERVICES SHEET 01			
Drwg No :	42-43 RS_20_Y_00.01	Rev:	В	
Scale :	1:20	Original sheet size:	A1	