




CH1 & CH2 - 2nd floor front Living room sash windows

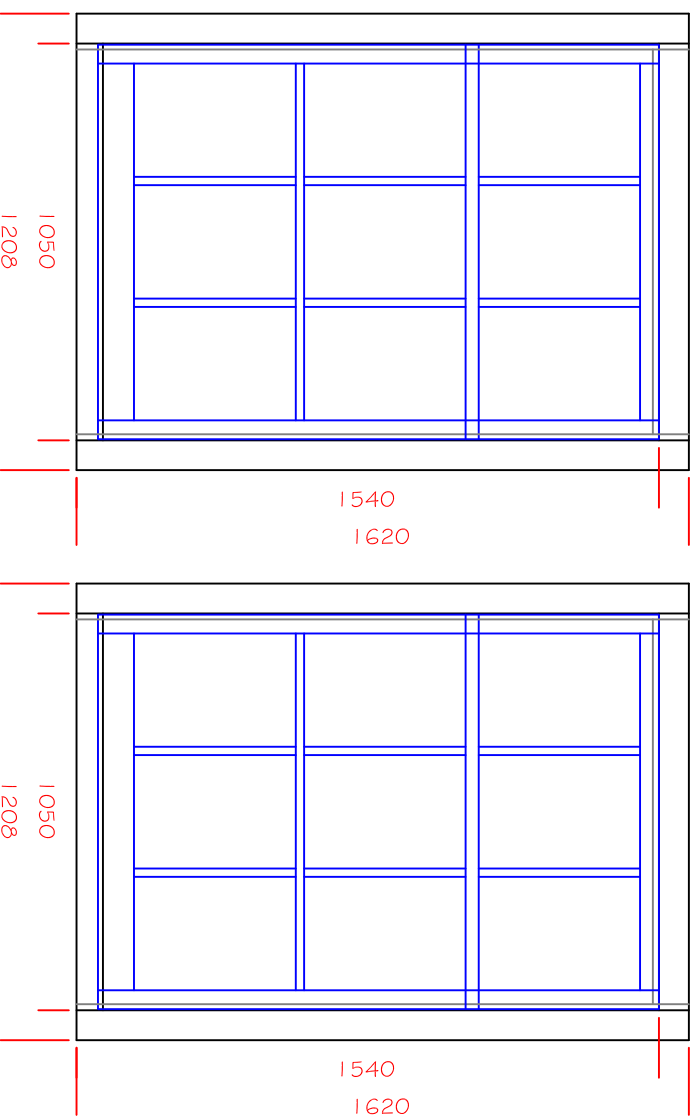


CH3 - 2nd floor rear Bedroom

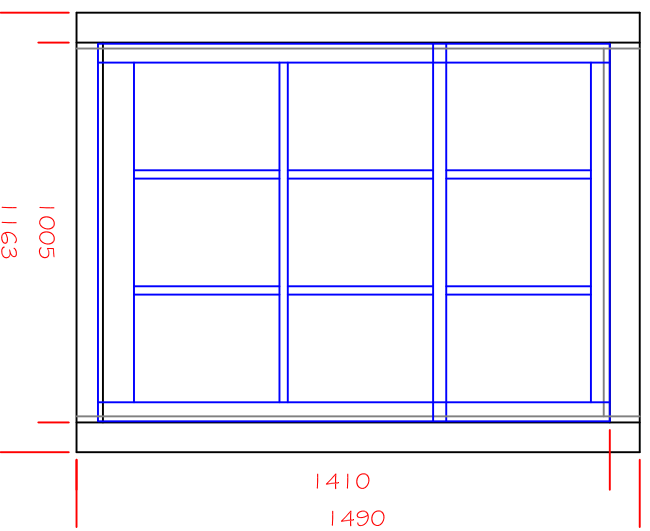

CH4 - 2nd floor rear landing

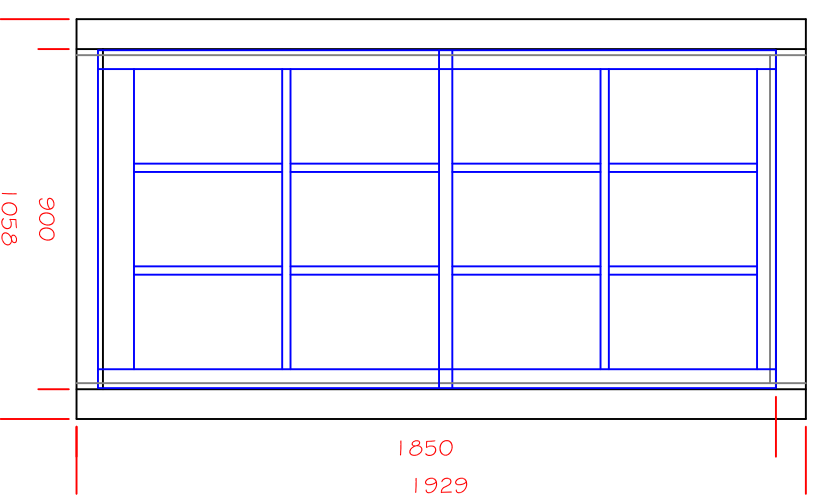

CH5 - 1st floor rear landing

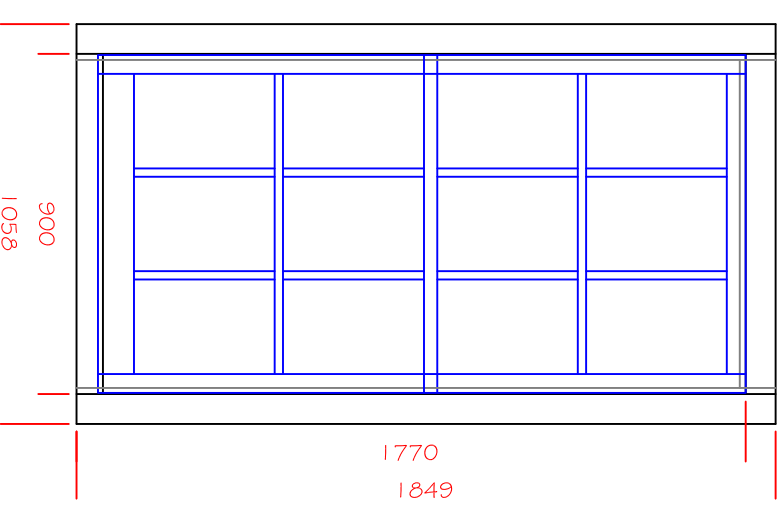

Specification:

Set-up - Conservation box sash windows with ropes, pulleys and weights closely replicating originally intended designs & detail. Ovolo moulding detail on sashes internally, chamfered glazing beads externally. 136mm deep framework, 45mm sashes

Timber - Sapele hardwood sliding sashes, external linings and sill sections. Everything else Northern Redwood

Glass - High performance SLIM SEAL Krypton gas filled 4-8-4 double glazed units with white warm edge spacer bars, all toughened safety glass

Weather seals - Amodus triple seal weather seals incorporated into external linings, staff beads, parting beads and meeting rails

Paint finish - 3 coats of spray applied semi-matt white Sikken's Rubbol WF380 (RAL 9016) internally & externally

Furniture & fittings - Satin chrome pulleys, sash lifts, security stop locks & Fitch fasteners

Installation - into existing openings



26 Kimble Road
LONDON SW19 2AS
t: 0208 286 9279 m: 07866 385 447
www.amodus.co.uk

Conservation slim seal sash windows

CLIENT:	Mr Jonny Bucknell
SITE ADDRESS:	8 Chamberlain Street, Primrose Hill NW1 8XB
JOB NO/ DATE:	19832 19-09-2019
SCALE:	1/20 @A3 Drawing No 01