# JOINERY DETAIL SHEET

## 1 x 1 Complete New Cord Hung Single Box Sash Window (Non DocL) (Classic)

| Customer | Job No | Item No | Sheet |
|---|---|---|---|
| Leonard | D36111 | 1 | 1 of 2 |

*Diagram*

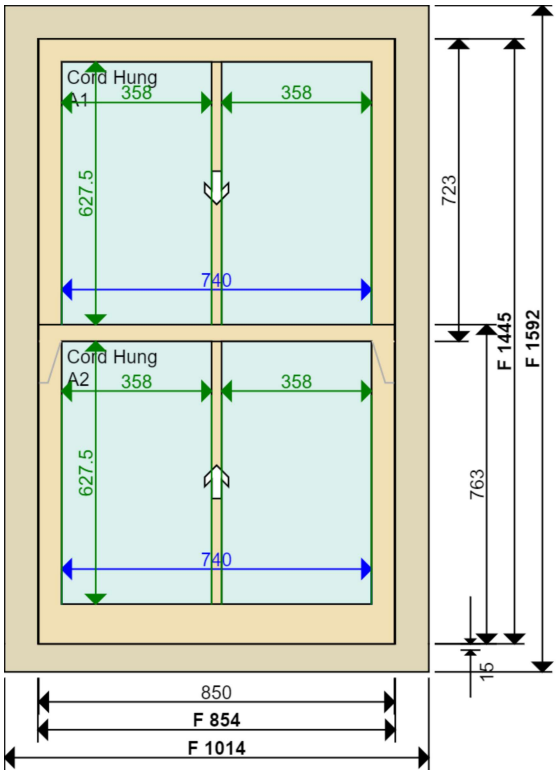


*Sectional Details*

| | |
|---|---|
| Finished Frame Head | 134 x 95 mm |
| Finished Frame Jamb | 134 x 95 mm |
| Finished Cill | 134 x 67 mm |

| | | |
|---|---|---|
| Sash Head | 55 mm | |
| Sash Stile | 55 mm | |
| Sash Btm Rail (int) | 95 mm | Stepped |
| Sash Midrail | 40 mm | |
| Sash Thickness | 40 mm | |
| Top Sash Horn | Template Attached | |
| Btm Sash Horn | No horn | |

*Location*

**Second Floor Rear Living Room**

| | |
|---|---|
| Glazing Bar | 24 mm (4 mm Nib) |
| Profile | Ovolo |
| Moulding Cutter | 8 x 8 with 6 mm shoulder |
| Glazing Rebate | 10 x 24 mm |

*Material*

**Accoya sashes, Accoya frame, Accoya cill**

*Quantity*

**1** of shown on drawing

*Ironmongery*

1 x Fitch Catch PB
1 x Lock Chubb Window Key
4 x Pulley Wheel (Brass Wheel) PB
4 x Rola Lock Back Plate Fastener
2 x Rola Lock PB
2 x Sash Lift PB

*Glazing - HERITAGE UNITS*

| | Internal Pane | Spacer | External Pane |
|---|---|---|---|
| Top | 4mm Low E | 6mm | 4mm Low Iron |
| Btm | 4mm Low E Toughened | 6mm | 4mm Low Iron Toughened |

Dry Seal | White Tape, White Spacer | Argon Filled

*Paint Finish*

| | |
|---|---|
| Internal | Standard White |
| External | Standard White |
| Cill | Standard White |

*Production Notes*

2 | 8 | 6 | 24

*Installation Notes*

Installed: Internally

*Job Tracking*

Order received: 18-08-2022 Print date: 18-09-2022
Sold by: Ronan King
Surveyed by: Daniel Piatko Last modified date: 18-09-2022

Internal Hazard: White Carpet