

Hydra Plan - 3880


Spray heads must be located a minimum of 1.5m from the cooking hob/oven location.

Spray heads must be located a minimum of 3m from any open fire source including log burners.

Spray heads must be at least 0.5m away from a window to avoid being covered/blocked by curtains/blinds.

Spray heads must not be covered or blocked by any piece of furniture.

Spray heads mounted above the kitchen work surfaces require a minimum of 400mm clearance from the spray head centre and the work top and a minimum of 100mm clearance from the spray head centre and the underside of any wall mounted units.

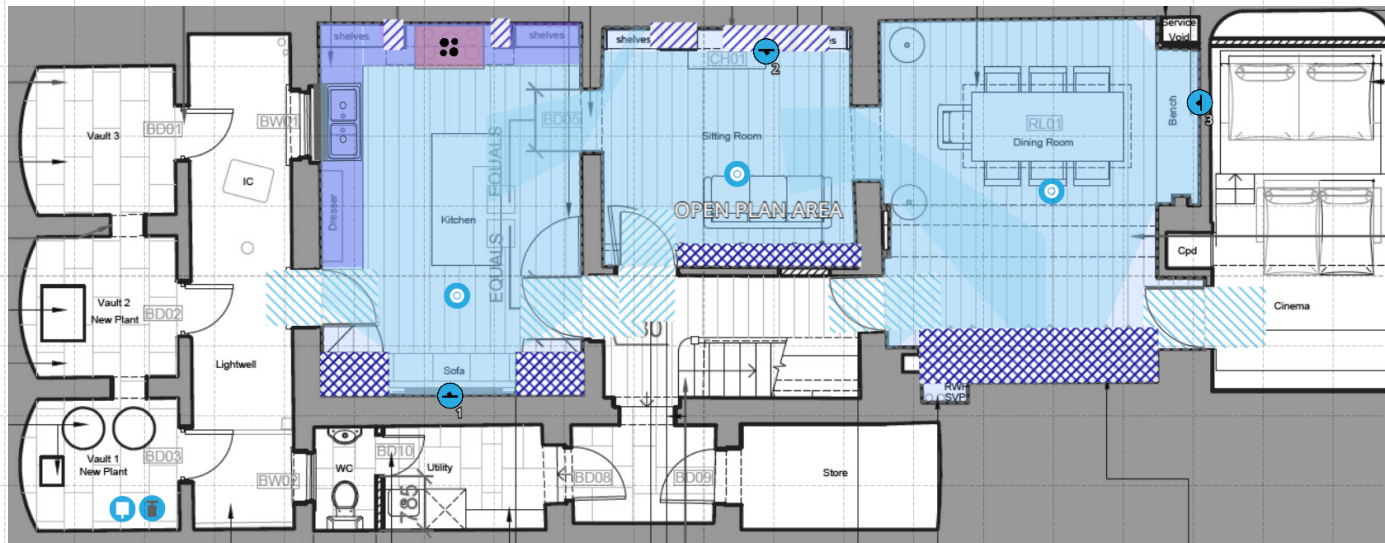

SYSTEM INVENTORY

- DETECTOR (3)
- PUMP (1)
- SMARTSCAN (3)
- CONTROLLER (1)
- ZONE TO CONSIDER
- PROTECTED AREA
- STERILE AREA
- DOOR
- WINDOW

SPECIFIER: Hannah
EMAIL: info@bluelightsafety.co.uk

ADDRESS: 1 Crestfield Street
WC1H 8AT United Kingdom

AREA DETAILS
TOTAL: 45.70m²
HIGHEST CEILING HEIGHT: 3.5m

SYSTEM DETAILS
PUMP COVERAGE: 44.06m²
UNPROTECTED AREA: 1.65m²

NOTES:
Objective: Code compliance. Meeting building regulations