




This material has been reproduced from Ordnance Survey digital map data with the permission of the controller of Her Majesty's Stationery Office, © Crown Copyright.



1. Taken from 1st floor level showing existing a/c units within courtyard

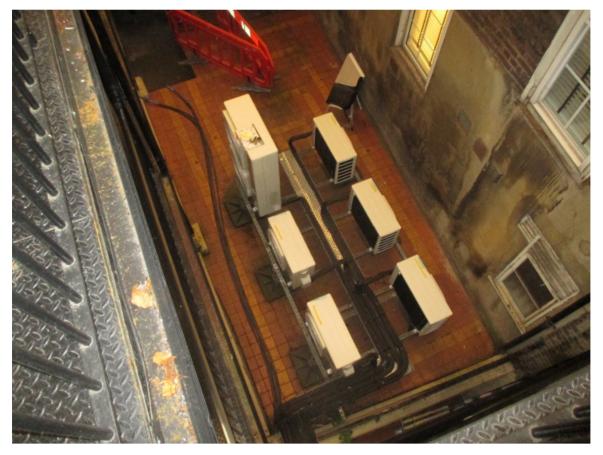

2. Taken from 2^{nd} floor showing existing a/c units with rear of bank



3. Air conditioning units showing nearest window



4. View towards side of existing a/c units



5. View looking down on a/c units

Delegated Report		Analysis sheet		Expiry Date:	24/10/2017			
(Members Briefing)			N/A / attached		Consultation Expiry Date:	07/06/2020		
Officer				Application Nu	umber(s)			
Sofie Fieldsend				1. 2017/3835/P 2. 2017/4297/L				
Application A	Address			Drawing Numbers				
49 Heath Street LONDON NW3 6UF				Refer to draft decis	sion notice			
PO 3/4	Area Tea	m Signature	C&UD	Authorised Of	ficer Signature			
Proposal(s)								
			x condensers a und floor unit (/		nclosures within	the internal		
Recommendation(s): action		action	Conditional Planning Permission and warning of enforcement Listed Building Consent and warning of enforcement action					
Application Type:		 Full Planning Permission Listed Building Consent 						

Conditions or Reasons for Refusal:	Refer to Decision Notice							
Informatives:								
Consultations								
Adjoining Occupiers:	No. notified	0	No. of responses	9	No. of objections	9		
Summary of consultation responses:	 21/09/2017) an 9x objections w 'The Clocktowe 1. The air the inter 2. Noise, a 3. Location incorrect 4. Not info 5. Position apartme 6. Health a 7. Query if the com 8. Loss of Officer's Resp 1. The rep not conservisual a 2. See par 3. A revise Environ 4. The Connotice a guidance resident revised 5. The AC there ar 6. The Environ 	nd a sit vere re er' (the condition rnal applifie amplifie of pro- ton the rmed of ents. and saf units of imercial commu- comse: laceme sidered mental uncil no ragraph ed noise mental uncil no ts of the plans t unit is re other vironme s.	ent units are not visib I to cause a detrimen	ed on 0 ⁴ eholders htly and ling. Fla courtyar ng unit a docume s. d affect here wit bccupy e le from tal degr ubmitted onsultati d in line as been they are rns. way from ylight. bas raise	1/09/2017 to 22/09/2 s of the 49 Heath St have adverse impa- ts overlook develop d. and measurements a ent. right of light to one of thin the building suc- entire courtyard. the public realm and ree of harm in terms d and reviewed by the fon letters. However with the Council's working closely with updated on progress and the existing windows and no health and sate	2017 treet, act on oment. are of the ch as d are c of the c, a site h the ss and ow and fety		

the commercial unit) also backs residential properties. This would not solve the overall amenity issue.
8. There was a commercial lease agreed to use this space with planning permission granted in 2005. The revised proposal occupies a smaller footprint than the previously approved application.
Following revisions a further site and press notice were issued.
The application was advertised in the local press on 26/03/2020 (expiring 19/04/2020) and a site notice was displayed on 27/03/2020 to 20/04/2020.
9x objections were again received from the same leaseholders of 49 Heath Street, 'The Clocktower'.
 Their objections can be summarised as follows: Red line incorrect on OS map Floor plans do no included annotated measurements and does not show location in relation to the flats Noise report states nearest residential property is 4m away and plans show the distance as 2m. Noise test undertaken in the wrong location. Concerns about noise impacts Concerns about loss of light, request daylight and sunlight report Units installed without listed building consent Issues with wording of design and access statement Commercial lease not followed. Existing unit's dripping water has caused damage to floor fabric
 Officer response: Red line corrected and was subject to public consultation. Plans have been annotated to show the measurements of the new a/c units, scale bars have been provided on the drawings and the nearest residential property is 3.1-3.2m away. The application shows the location of the courtyard in relation to the flats; and the flat layouts are not required to be shown in detail. See sections 3.17-3.18 See section 3.5 This application seeks to resolve this breach. Design and access statement revised. Commercial lease is a civil matter not a material planning consideration. The existing units would be replaced and the applicant would be required to repair any damage. This would be secured by condition.
A third round of consultation through a press and site notice was undertaken following correction of the OS map red line.
The application was advertised in the local press on 14/05/2020 (expiring 07/06/2020) and a site notice was displayed on 13/05/2020 to 06/06/2020
No responses were received during this third round of consultation.

CAAC/Local groups*	Hampstead CAAC and Hampstead Neighbourhood forum were consulted
comments:	and no responses were received to the original or revised scheme.

Site Description

The application relates to a grade-II-listed former fire station, now a building society on a prominent corner site in the Hampstead Conservation Area.

The existing air conditioning units are located within a courtyard on the first floor to the rear at No 49 Heath Street, which is occupied by the Nationwide Building Society (use class A2) at ground floor. Nine residential flats, which are accessed by the lightwell staircase, overlook this internal courtyard at 49 Heath Street. Some a/c units have already been installed on site without consent. This application seeks permission for a revised scheme.

Relevant History

2005/3045/P - Retention of 6 x air conditioning units at the rear on the 1st floor level flat roof, to serve the Building Society office (Class A2) on the ground floor – Granted 11/11/2005

2014/4802/P - Installation of a microcell antenna and ancillary telecommunications equipment to front elevation.- **Granted 24/09/2014**

2014/5104/L - Alterations in connection with the installation of a microcell antenna and ancillary telecommunications equipment to front elevation – **Granted 24/09/2017**

2017/3194/P - Installation of a replacement shopfront with associated works to existing bank – Granted 22/08/2017

2017/3265/L - Installation of a replacement shopfront with associated works involving the removal of 5 guard bars on side elevation windows and internal alterations to floor, wall and ceiling of existing bank – Granted 22/08/2017

2017/3196/P - Display of x2 fascia and x2 projecting externally illuminated signs on Heath Street and Holly Hill elevations and x1 internally illuminated ATM surround to existing bank – **Granted 22/08/2017**

2017/5702/L - Installation of 5no floor boxes at ground floor level – Granted 08/01/2018

EN20/0177 - Unauthorised air conditionings units

Relevant policies

National Planning Framework (2019)

The London Plan (2016) Intend to publish London Plan (2019)

Camden Local Plan (2017)

A1 Managing the impact of development A4 Noise and vibration D1 Design D2 Heritage CC1 Climate change mitigation

Camden Planning Guidance

CPG Design (2019). CPG Amenity (2018)

Hampstead Neighbourhood Plan 2018

DH1 Design DH2 Conservation areas and listed buildings

Hampstead Conservation Area Appraisal and Management Strategy (October 2001)

Assessment

1. Proposal

- 1.1 Planning permission and listed building consent are sought for the replacement of six condenser units, within the internal courtyard at the rear of the Nationwide premises, with two condenser units and associated enclosures. The enclosures measure:
 - o 2m wide by 1.5m deep and 2.8m high
 - 1.7m wide by 1m deep and 1.7m high
- 1.2 There is an active enforcement case ref. EN20/0177 on the installation of the 6x existing units installed without planning permission. Residents have raised concerns that the current units are an eyesore and noisy. The revised proposal seeks to remove the unauthorised units and replace them with two condenser units.

2. Amendments

- 2.1 During the course of the application process, the following revisions were negotiated:
 - The retrospective 6x units will now be replaced with 2x units along the back wall of the courtyard and they will be in acoustic enclosures. The back wall of the courtyard is part of the bank.
 - Revised noise report so that it complies with Policies A1 and A4 of the Camden Local Plan
 - Red line corrected to show accurate location of development
 - More detail provided on plans to show units in location to the residential units.

3. Assessment

- 3.1 The material considerations for this application are summarised as follows:
 - Design and Conservation (including impact on Listed Building)
 - Amenity of neighbouring residential occupants
 - Sustainability and the 'cooling hierarchy

3.2 Design and Conservation (including impact on Listed Building)

- 3.1 Local Plan Policies D1(Design) and D2 (Heritage) states that within conservation areas, the Council will only grant permission for development that preserves and enhances the character and appearance of the conservation area.
- 3.2 The replacement air conditioning units are located on the first floor landing area (internal courtyard). In 2005 planning permission was granted for 6 x air conditioning units on this first floor internal courtyard at the rear of Nationwide Bank. This set the principle of air conditioning units being acceptable in this location to serve the commercial unit at ground floor. In 2017 these units

were replaced with 6x new units without planning permission. They were installed in the same location and utilising the existing metal base units, although one of the units is larger in scale than the original units granted permission in 2005. Since then the Council has been working with the applicant to negotiate a revised scheme to address the resident's concerns about visual amenity and noise. The Council advised that the number of units should be reduced and acoustic enclosures should be included.

- 3.3 The scheme was revised to reduce the number of units from six to two with acoustic enclosures to mitigate the noise and improve visual amenity. The units were relocated to the back wall of the courtyard to minimise their visual impact. The courtyard is enclosed and there would not be any public views of the units, only some private views of the units would be possible from the stairwell and the windows of the flats that face on to the lightwell.
- 3.4 The design and access statement states that although light grey is suggested for the acoustic enclosures that these can be powder coated any colour in line with the advice of the Council's Conservation Officer. It is considered black to match the existing railings would be preferable and a condition securing this colour for the acoustic enclosures has been attached.
- 3.5The new location has been carefully chosen to not obscure nearby windows. Given that the principle of air conditioning units on this terrace has already been established, the reduction in the number of air conditioning units, revised location and the use of a suitable acoustic enclosure would result in an acceptable scheme. It is considered that this would be a visual improvement on the unauthorised units.
- 3.6 The listing of the building refers to the exterior features and states the interior was not inspected. The mechanical plant would not have an impact on the historic setting of the building and the proposed condenser units would be located in the same courtyard as the previously granted units. Given the internal courtyard location, the air-conditioning units would remain out of public view and the visual significance of this building would remain unaffected. Moreover, the contribution that the host building makes to the character and appearance of the conservation area would be unaltered and there would be no harm to the historic architecture of the listed building.
- 3.7 The design and access statement outlines that all new and existing pipework would be rerouted to suit the new locations and be neatly dressed and contained. The existing surface to the courtyard will be cleaned and any damaged areas made good.
- 3.8 The proposed heritage statement outlined that the existing unlawful air-conditioning units are located on a galvanized steel framework that is located centrally within the tiled podium on rubber spreader pads, this frame was reused from the 2005 permission. The pipework and electrical supply follow the route of the original units from the tiled podium into the Nationwide premises. The revised proposal will remove this steel framework and units. Any marks left by the removal of this framework and spreader pads will be cleaned and made good. The new units will be supported directly on rubberised pads without any holes being drilled into the terracotta tiles.
- 3.9 The galvanized cable and pipework containment tray that will support and contain the pipes and cables will be located as close to the rear wall as possible and return to the position where the original containment tray connects the tiled podium to the Nationwide premises. The pipework and cables would be fixed neatly to the containment tray. The containment tray would rest on supports with rubberized feet to avoid damage to the tiled surface of the podium. The installation is designed to minimize any impact on the listed building. The Conservation officer has confirmed that the mechanical plant including pipework would not have any impact on the historical fabric of the listed building.

- 3.10 Special regard has been attached to the desirability of preserving the listed building or its setting or any features of special architectural or historic interest which it possesses under s.66 of the Planning (Listed Buildings and Conservation Areas) Act 1990 as amended by the Enterprise and Regulatory Reform Act (ERR) 2013.
- 3.11 Special attention has been paid to the desirability of preserving or enhancing the character or appearance of the conservation area, under s.72 of the Planning (Listed Buildings and Conservation Areas Act) 1990 as amended by the Enterprise and Regulatory Reform Act (ERR) 2013.
- 3.12 With the revised proposal the visual obtrusiveness of the existing air conditioning units would be reduced. It is considered that the new siting and enclosure is an overall improvement and given the siting in an enclosed rear lightwell, surrounded by railings it is not considered to cause harm to the host building. The units would not be visible from the public realm. The appearance of the units are therefore considered to be acceptable for this relatively hidden location. The Council's Conservation Officer has raised no objection to the proposed new location and layout.
- 3.13 Amenity of adjoining residential occupants
- 3.14 Policy A1 seeks to protect the amenity of Camden's residents by ensuring the impact of development is fully considered. Policy A4 seeks to ensure that noise and vibration is appropriately considered at the design stage and that noise sensitive uses are not negatively impacted by noise and vibration.
- 3.15 Objections were received raising concerns about loss of light and the need for a daylight and sunlight report for the revised scheme. The revised proposal reduces the number of units down from 6 to 2 and relocates them against the back wall of the courtyard so they are no longer centrally located. In terms of height the larger unit with enclosure will stand at 2.8m high (1.5m depth) and the second unit with enclosure stands at 1.7m (1m depth). The larger unit will be between 3.1-3.2m away from the window of the closest residential unit. The revised development would comply with the 25 degree light test outlined in CPG Amenity. Given the separation distance and modest depth of the units it is considered in this instance that it would be unreasonable to request a daylight and sunlight report and the proposal would not result in significant loss of light to an extent that would warrant a reason for refusal.
- 3.16 The normal opening hours of the commercial unit are Monday-Friday 9am-4:30pm, with the units likely to be operational an additional 30minutes to a 1 hour either side of these hours.
- 3.17 The existing units as installed without planning permission do not comply with the noise criteria outlined in policy A4. A revised noise assessment was submitted by the applicant with the new units and location, this was assessed by the Council's Environmental Health Officer and found to comply with policy A1 and A4 if the acoustic enclosures are installed. Given the sensitive location the environmental health officer recommended that the following conditions be included in addition to the standard noise conditions to control the level of noise from the proposed plant. That an acoustic enclosure be installed prior to the use of the air conditioning units and the hours of operation limited to office hours to reduce the chance of unnecessary noise transfer to nearby residents.
- 3.18 Objections were received that the noise report was not done in the correct location, the Council's Environmental Health officer reviewed their concern and concluded that the report acknowledges that without the acoustic enclosures the air con units would fail the required noise criteria anyway and that acoustic enclosures would be required no matter the location which is why their installation prior to use is secured by condition to address this concern.

3.19 A condition has been attached to ensure that the unlawful units are removed within 3months of the permission being approved. Normally a shorter period to comply would be requested but given the current covid-19 pandemic a longer time period to comply is considered reasonable.

4.0 Energy and Sustainability

4.1 Policy CC2 (Adapting to climate change) normally requires air conditioning applications to demonstrate thermal modelling which shows that there is a clear need for it after all preferred measures are incorporated in line with the London Plan cooling hierarchy. However, given that this proposal would replace the original lawful A/C units it considered that this information is not required in this instance.

4.2 An informative has been attached reminding the applicant to consider the government's recommended minimum energy efficiency standards for building types.

5.0 Conclusion

5.1 Overall, the revised proposal would have no detrimental impact on the character and appearance of the listed building and would preserve the character of the conservation area and would not significantly affect the amenity of nearby residents, all in accordance with policies A1, A4, D1 and D2.

6. Recommendation

6.1 It is recommended that planning permission and listed building consent be granted with conditions.

The decision to refer an application to Planning Committee lies with the Director of Regeneration and Planning. Following the Members Briefing panel on Monday 29th June 2020, nominated members will advise whether they consider this application should be reported to the Planning Committee. For further information, please go to <u>www.camden.gov.uk</u> and search for 'Members Briefing'. Application ref: 2017/3835/P Contact: Sofie Fieldsend Tel: 020 7974 4607 Email: Sofie.Fieldsend@camden.gov.uk Date: 23 June 2020

Four Architecture & Design (London) Ltd The Lux Building 2-4 Hoxton Square London N1 6NU



Development Management

Regeneration and Planning London Borough of Camden Town Hall Judd Street London WC1H 9JE

Phone: 020 7974 4444

planning@camden.gov.uk www.camden.gov.uk



Dear Sir/Madam

Town and Country Planning Act 1990 (as amended)

Full Planning Permission Granted and Warning of Enforcement Action

Address: 49 Heath Street LONDON NW3 6UF

Proposal:

Replacement of 6x condensers with 2x condensers and associated enclosures within the internal courtyard at first floor to serve the ground floor unit (A2 use).

Drawing Nos: PA.00.00 Rev.A; EX.00.00; EX.01.E3; PR.00.00; PR.01.E3 Rev.C; Heritage Statement Rev.B dated June 2020 and Environmental Noise Survey and Plant Noise Assessment Report ref. 24604/PNA2 Rev3 dated 13 January 2020.

The Council has considered your application and decided to grant permission subject to the following condition(s):

Condition(s) and Reason(s):

1 The development hereby permitted must be begun not later than the end of three years from the date of this permission.

Reason: In order to comply with the provisions of Section 91 of the Town and Country Planning Act 1990 (as amended).

2 Within three months of the date of this permission the 6x unlawful air conditioning units shall be removed.

Reason: To safeguard the amenities of the adjoining premises and the area generally in accordance with the requirements of policies A1 and A4 of the London Borough of Camden Local Plan 2017.

3 The development hereby permitted shall be carried out in accordance with the following approved plans:

PA.00.00 Rev.A; EX.00.00; EX.01.E3; PR.00.00; PR.01.E3 Rev.C; Heritage Statement Rev.B dated June 2020 and Environmental Noise Survey and Plant Noise Assessment Report ref. 24604/PNA2 Rev3 dated 13 January 2020.

Reason: For the avoidance of doubt and in the interest of proper planning.

4 The acoustic enclosures shall be painted black prior to installation.

Reason: To safeguard the character and appearance of the listed building in accordance with the requirements of policies D1 and D2 of the London Borough of Camden Local Plan 2017.

5 Noise levels at a point 1 metre external to sensitive facades shall be at least 10dB(A) less than the existing background measurement (LA90), expressed in dB(A) when all plant/equipment (or any part of it) is in operation unless the plant/equipment hereby permitted will have a noise that has a distinguishable, discrete continuous note (whine, hiss, screech, hum) and/or if there are distinct impulses (bangs, clicks, clatters, thumps), then the noise levels from that piece of plant/equipment at any sensitive façade shall be at least 15dB(A) below the LA90, expressed in dB(A).

Reason: To safeguard the amenities of the neighbouring residential premises and the area generally in accordance with the requirements of policies A4 and A1 of the London Borough of Camden Local Plan 2017.

6 Automatic time clocks shall be fitted to the equipment/machinery hereby approved, prior to commencement of the use of the units, to ensure that the plant/equipment does not operate between 18:00hrs and 08:00hrs. The timer equipment shall thereafter be permanently retained and maintained in accordance with the manufacturer's recommendations.

Reason: To safeguard the amenities of the nearby occupiers and the area generally in accordance with the requirements of policies A1 and A4 of the London Borough of Camden Local Plan 2017.

7 Before the first use of the air-conditioning units hereby approved, the airconditioning plant shall be provided with the recommended sound attenuation as specified in report 24604/PNA2 Rev3, dated 13 January 2020 hereby approved. All such measures shall thereafter be retained and maintained in accordance with the manufacturers' recommendations. Reason: To prevent the transmission of noise and vibration throughout the building and or into any neighbouring premises, thus safeguarding the amenities of the adjoining premises and the area generally in accordance with the requirements of policies A1 and A4 of the London Borough of Camden Local Plan 2017.

Informative(s):

1 ENFORCEMENT ACTION TO BE TAKEN:

The Director of Culture and Environment will instruct the Borough Solicitor to issue an Enforcement Notice alleging a breach of planning control in respect to the existing unauthorised air conditioning units.

- In light of sustainability planning guidance and LB Camden's Climate Emergency Declaration, when replacing energy-consuming units the Council recommend consideration of the government's recommended minimum energy efficiency standards for building services. The recommended specifications depending on air conditioning type are listed in Table 1 of the Domestic Building Services Compliance Guides.
- 3 Your proposals may be subject to control under the Building Regulations and/or the London Buildings Acts that cover aspects including fire and emergency escape, access and facilities for people with disabilities and sound insulation between dwellings. You are advised to consult the Council's Building Control Service, Camden Town Hall, Judd St, Kings Cross, London NW1 2QS (tel: 020-7974 6941).
- 4 Noise from demolition and construction works is subject to control under the Control of Pollution Act 1974. You must carry out any building works that can be heard at the boundary of the site only between 08.00 and 18.00 hours Monday to Friday and 08.00 to 13.00 on Saturday and not at all on Sundays and Public Holidays. You are advised to consult the Council's Noise and Licensing Enforcement Team, Camden Town Hall, Judd St, Kings Cross, London NW1 2QS (Tel. No. 020 7974 4444 or search for 'environmental health' on the Camden website or seek prior approval under Section 61 of the Act if you anticipate any difficulty in carrying out construction other than within the hours stated above.
- 5 This approval does not authorise the use of the public highway. Any requirement to use the public highway, such as for hoardings, temporary road closures and suspension of parking bays, will be subject to approval of relevant licence from the Council's Streetworks Authorisations & Compliance Team London Borough of Camden 5 Pancras Square c/o Town Hall, Judd Street London WC1H 9JE (Tel. No 020 7974 4444). Licences and authorisations need to be sought in advance of proposed works. Where development is subject to a Construction Management Plan (through a requirement in a S106 agreement), no licence or authorisation will be granted until the Construction Management Plan is approved by the Council.

6 All works should be conducted in accordance with the Camden Minimum Requirements - a copy is available on the Council's website at <u>https://beta.camden.gov.uk/documents/20142/1269042/Camden+Minimum+Requi</u> <u>rements+%281%29.pdf/bb2cd0a2-88b1-aa6d-61f9-525ca0f71319</u> or contact the Council's Noise and Licensing Enforcement Team, 5 Pancras Square c/o Town Hall, Judd Street London WC1H 9JE (Tel. No. 020 7974 4444)

Noise from demolition and construction works is subject to control under the Control of Pollution Act 1974. You must carry out any building works that can be heard at the boundary of the site only between 08.00 and 18.00 hours Monday to Friday and 08.00 to 13.00 on Saturday and not at all on Sundays and Public Holidays. You must secure the approval of the Council's Noise and Licensing Enforcement Team prior to undertaking such activities outside these hours.

In dealing with the application, the Council has sought to work with the applicant in a positive and proactive way in accordance with paragraph 38 of the National Planning Policy Framework 2019.

You can find advice about your rights of appeal at: http://www.planningportal.gov.uk/planning/appeals/guidance/guidancecontent

Yours faithfully

Director of Economy, Regeneration and Investment

DECISION



Regeneration and Planning Development Management London Borough of Camden Town Hall Judd Street London WC1H 9JE

Tel 020 7974 4444

planning@camden.gov.uk www.camden.gov.uk/planning

Four Architecture & Design (London) Ltd The Lux Building 2-4 Hoxton Square London N1 6NU



Dear Sir/Madam

DECISION

Planning (Listed Building and Conservation Areas) Act 1990

Listed Building Consent Granted and Warning of Enforcement Action

Address: 49 Heath Street LONDON NW3 6UF DECISION

Proposal:

Replacement of 6x condensers with 2x condensers and associated enclosures within the internal courtyard at first floor to serve the ground floor unit (A2 use).

Drawing Nos: PA.00.00 Rev.A; EX.00.00; EX.01.E3; PR.00.00; PR.01.E3 Rev.C; Heritage Statement Rev.B dated June 2020 and Environmental Noise Survey and Plant Noise Assessment Report ref. 24604/PNA2 Rev3 dated 13 January 2020.

The Council has considered your application and decided to grant subject to the following condition(s):

Conditions And Reasons:

1 The works hereby permitted shall be begun not later than the end of three years from the date of this consent.

Reason: In order to comply with the provisions of Section 18 of the Planning (Listed Buildings and Conservation Areas) Act 1990.

Executive Director Supporting Communities

2 The development hereby permitted shall be carried out in accordance with the following approved plans:

PA.00.00 Rev.A; EX.00.00; EX.01.E3; PR.00.00; PR.01.E3 Rev.C; Heritage Statement Rev.B dated June 2020 and Environmental Noise Survey and Plant Noise Assessment Report ref. 24604/PNA2 Rev3 dated 13 January 2020.

Reason: In order to safeguard the special architectural and historic interest of the building in accordance with the requirements of policy D2 of the Camden Local Plan 2017.

3 All new work and work of making good shall be carried out to match the existing adjacent work as closely as possible in materials and detailed execution.

Reason: In order to safeguard the special architectural and historic interest of the building in accordance with the requirements of policy D2 of the Camden Local Plan 2017.

4 The acoustic enclosures shall be painted black prior to installation.

Reason: In order to safeguard the special architectural and historic interest of the building in accordance with the requirements of policy D2 of the Camden Local Plan 2017.

5 Within three months of the date of this permission the 6x unlawful air conditioning units shall be removed and any damage to the floor made good.

Reason: In order to safeguard the special architectural and historic interest of the building in accordance with the requirements of policy D2 of the Camden Local Plan 2017.

Informative(s):

1 ENFORCEMENT ACTION TO BE TAKEN:

The Director of Culture and Environment will instruct the Borough Solicitor to issue an Enforcement Notice alleging a breach of planning control in respect to the existing unauthorised extensions.

- 2 Your proposals may be subject to control under the Building Regulations and/or the London Buildings Acts that cover aspects including fire and emergency escape, access and facilities for people with disabilities and sound insulation between dwellings. You are advised to consult the Council's Building Control Service, Camden Town Hall, Judd St, Kings Cross, London NW1 2QS (tel: 020-7974 6941).
- 3 You are advised that any works of alterations or upgrading not included on the approved drawings which are required to satisfy Building Regulations or Fire Certification may require a further application for listed building consent.

2017/4297/L

4 Noise from demolition and construction works is subject to control under the Control of Pollution Act 1974. You must carry out any building works that can be heard at the boundary of the site only between 08.00 and 18.00 hours Monday to Friday and 08.00 to 13.00 on Saturday and not at all on Sundays and Public Holidays. You are advised to consult the Council's Noise and Licensing Enforcement Team, Camden Town Hall, Judd St, Kings Cross, London NW1 2QS (Tel. No. 020 7974 4444 or search for 'environmental health' on the Camden website or seek prior approval under Section 61 of the Act if you anticipate any difficulty in carrying out construction other than within the hours stated above.

In dealing with the application, the Council has sought to work with the applicant in a positive and proactive way in accordance with paragraph 38 of the National Planning Policy Framework 2019.

You can find advice about your rights of appeal at: http://www.planningportal.gov.uk/planning/appeals/guidance/guidancecontent

Yours faithfully

Director of Regeneration and Planning

DECISION